



BOSCH



POWER TOOLS PROGRAMME 2020

2nd Edition July 2020



BOSCH

Cordless Power Tools Range



* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. Terms and Conditions apply.

Brushless Motor Range

HEAVY DUTY

1 year warranty

Cordless Screw / Drill Driver
GSR 12 V-30

Cordless Impact Drill
GSB 12 V-30

Cordless Impact Drill
GSB 18 V-50

Cordless Angle Grinder
GWS 18V - 10

Cordless Screw / Drill Driver
GSR 18 V-50

Cordless 3" Angle Grinder
GWS 12-76 V-EC (Solo)**

Cordless Screw / Drill Driver
GSR 18 V-60 FC (Solo)**

Cordless Multi-Cutter
GOP 12 V-28 (Solo)**

Cordless Impact Driver / Wrench
GDV 18 V-200C

Cordless Edge Router
GKF 12 V-8 (Solo)**

BRUSHLESS MOTOR

Longer runtime
Longer lifetime

Cordless Rotary Hammer
GBH 36 V-EC Compact

Cordless Impact Driver
GDR 18 V-EC (Solo)**

Cordless Rotary Hammer
GBH 18 V-26 (Solo)**


Cordless Multi-Cutter
GOP 18 V-28 (Solo)**

Cordless Rotary Hammer
GBH 180-LI

Cordless Reciprocating Saw
GSA 18 V-32(Solo)**

Up to **30% MORE RUNTIME**

*Compared to Bosch power tools with DC motor of same class

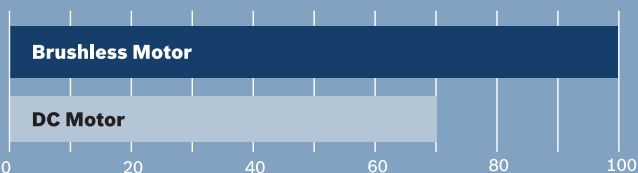

Less maintenance effort!

How it works



Brushless Motor
No brush sparking due to electrical switch by electronics.



DC Motor
Brush sparking at every mechanical switch operation

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. Terms and Conditions apply. ** Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Separately.

3.6 V Li-Ion Bosch Professional**IXO 3
Cordless Screwdriver
(0 601 960 2L5)****Capacity**

Max. Screw Dia.	: 5 mm
Max. Torque	: 4 Nm
No-load Speed	: 0 - 180 rpm
Battery Voltage	: 3.6 V / 1.3 Ah
Charger	: AL 1115 CV
Charging Time	: about 5 hours
Weight	: 0.3 kg

12 V Li-Ion Bosch Professional**GSR 120-LI GEN 2
Cordless Drill / Screwdriver
(0 601 9G8 0L0)****Capacity**

Battery Voltage	: 12 / 2.0 Ah
Torque (Hard / Soft)	: 30 / 14 Nm
No-load Speed	: 0 - 400 / 0 - 1,500 rpm
Drilling	
- in Wood	: 20 mm
- in Metal	: 10 mm
Weight	: 0.97 kg

**GSB 120-LI GEN 2
Cordless Impact Drill Driver
(0 601 9G8 1L0)****Capacity**

Battery Voltage	: 12 / 2.0 Ah
Torque (Hard / Soft)	: 30 / 14 Nm
No-load Speed	: 0 - 400 / 0 - 1,500 rpm
Drilling	
- in Wood	: 20 mm
- in Metal	: 10 mm
- in Masonry	: 8 mm
Weight	: 1.06 kg

**GDR 120-LI
Cordless Impact Driver
(0 601 9F0 0L6)****Capacity**

Battery Voltage	: 12 V / 2.0 Ah
Max. Torque Hard	: 100 Nm
No-load Speed	: 0 - 1,300 / 2,600 rpm
Impact Rate	: 2,800 - 3,200 bpm
Max Screw Dia.	: 8 mm
Bit Holder	: 1/4"
Charging Time	: 90 mins
Weight	: 1.05 kg

12 V Li-Ion Bosch Heavy Duty**GSR 12 V-30
Cordless Drill / Screwdriver
(0 601 9G9 0L1)****Capacity**

Battery Voltage	: 12 V / 2.0 Ah
Drilling Dia.: In Steel	: 8mm
In Wood	: 20 mm
Max. Torque (hard/soft)	: 30 / 17 Nm
No-load speed	: 0 - 420 / 1,600 rpm
Charger	: AL 12 V - 40
Charging Time	: 30 mins
Weight	: 0.82 kg

**GSB 12 V-30
Cordless Impact Drill Driver
(0 601 9G9 1L1)****Capacity**

Battery Voltage	: 12 V / 2.0 Ah
Drilling Dia.: In Steel	: 10mm
In Wood	: 20 mm
In Masonry	: 8mm
Max. Torque (hard/soft)	: 30 / 17 Nm
No-load speed	: 0 - 420 / 1,600 rpm
Charger	: AL 12 V - 40
Charging Time	: 30 mins
Weight	: 0.82 kg

**GDR 12 V-EC
Cordless Impact Driver
(0 601 9E0 0L2)****Capacity**

Battery Voltage	: 12 V / 2.0 Ah
Tool Holder System	: 1/4" Hex (6.35 mm)
No-load Speed	: 0 - 1,200 / 2,600 rpm
Impact Rate	: 0 - 2,700 / 3,100 bpm
Max. Torque	: 110 Nm
Charger	: GAL 1230 CV
Charging Time	: 45 mins
Weight	: 0.95 kg

**GSR 12 V-15 FC
Cordless Screw / Drill Driver
(0 601 9F6 0L0)****Capacity**

Battery Voltage	: 12 V / 2.0 Ah
Drilling Dia.: In Steel	: 10 mm
In Wood	: 19 mm
Max. Torque (hard/soft)	: 30 / 15 Nm
No-load Speed	: 0 - 400 / 1,300 rpm
Chuck Capacity	: 10 mm
Charging Time	: 45 mins
Charger	: AL 1230 CV
Weight	: 0.6 kg (tool only)

GWS 12-76 V-EC (Solo)
Cordless Angle Grinder
(0 601 9F2 000)****Capacity**

No-load Speed	: 19,500 rpm
Grinding Spindle Thread	: M5
Bore Size, Diameter	: 10 mm
Weight	: 0.9 kg

GOP 12 V-28 (Solo)
Cordless Multi-Cutter
(0 601 8B5 0L0)****Capacity**

Oscillation Angle on Left / Right	: 1.4°
No-load Speed	: 5,000 - 20,000 rpm
Weight	: 0.81 kg

GRO 12 V-35 (Solo)
Cordless Rotary Tool
(0 601 9C5 000)****Capacity**

Battery Voltage	: 12 V
Max. Collet Diameter	: 3.2mm
No-load speed	: 5,000 / 32,000 rpm
Weight	: 0.62 kg

GAS 12 V-LI (Solo)
Cordless Vacuum Cleaner
(0 601 9E3 081)****Capacity**

Battery Voltage	: 12 V
Container Volume	: 0.35 l
Filter Surface	: 408 cm²
Max. Volume Flow Rate	: 15 l/sec
Max. Volume Pressure	: 45 mbar
Weight	: 0.9 kg

GSA 12 V-LI (Solo)
Cordless Sabre Saw
(0 601 64L 9L2)****Capacity**

Battery Voltage	: 12 V
Stroke speed	: 0 - 3,000 spm
Stroke Length	: 14.5 mm
Pipe Diameter	: 50 mm
Wood	: 65 mm

GST 12 V-LI (Solo)
Cordless Jigsaw
(0 601 5A1 0L1)****Capacity**

Battery Voltage	: 12 V
No-load Stroke Rate	: 1,500 - 2,800 spm
Stroke Length	: 18 mm
Cutting Capacity	
- in Wood	: 70 mm
- in Aluminium	: 3 mm
- in Non-alloy Steel	: 3 mm
Weight	: 1.5 kg

GKF 12 V-8 (Solo)
Cordless Palm Router
(0 601 6B0 0L0)****Capacity**

Battery Voltage	: 12 V
Collect Size	: 8 (UNI), 6 & 1/4 (RAP) mm
No-load rotation	: 13,000 min ⁻¹
Weight	: 1.1 kg

GKS 12 V-LI (Solo)
Cordless Circular Saw
(0 601 6A1 0L2)****Capacity**

Battery Voltage	: 12 V
No-load Speed	: 1,400 rpm
Depth of Cut - 90°	: 26.5 mm
Bore Diameter	: 15 mm
Max. Bevel	: 45°
Weight	: 1.4 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. Terms and Conditions apply. ** Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Separately.

18 V Li-Ion Bosch Professional

GLI 12 V-330 (Solo)** Cordless Torch (0 601 4A0 000)

HEAVY DUTY
1 year warranty*



Capacity	
Battery Voltage	: 12 V
Runtime	: 6 h
Brightness	: 330 lmn
Brightness (1m Dis.)	: 350 lux
Weight	: 0.3 kg

GSR 180-LI Cordless Drill / Driver (0 601 9F8 1L0)



Capacity	
Battery Voltage	: 18 V / 1.5 Ah
Chuck Capacity	: 13 mm
Clutch Setting	: 20 + 1
No-load Speed (1st gear)	: 0 - 450 rpm
(2nd gear)	: 0 - 1,700 rpm
Torque Settings	: 20+1
Max Screw Dia.	: 10 mm
Max Drilling Wood / Steel	: 35 / 10 mm
Weight	: 1.0 kg
Charger	: AL 1814 CV

GSB 180-LI Cordless Impact Drill (0 601 9F8 3L0)



Capacity	
Battery Voltage	: 18 V / 1.5 Ah
Chuck Capacity	: 13 mm
Torque (Hard / Soft)	: 54 / 21 Nm
No-load Speed (1st gear)	: 0 - 450 rpm
(2nd gear)	: 0 - 1,700 rpm
Impact Rate	: 0 - 27,000 min
Max Screw Dia.	: 10 mm
Max Drilling Wood / Steel	: 35 / 10 mm
Masonry	: 8 mm
Charger	: AL 1814 CV

GBH 180-LI Cordless hammer (0 611 911 1L2)



Capacity	
Battery Voltage	: 18 V / 4.0 Ah
Impact Force	: 2.0 J
Drilling Capacity	: 20mm
No-load Speed	: 0 - 1,800 rpm
Impact rate	: 0 - 5,100 bpm
Charger	: AL 18 V - 40
Charging Time	: 60 mins
Weight (bare tool)	: 2.3 kg

GDX 180-LI Cordless Impact Wrench / Driver (0 601 9G5 210)



Capacity	
Battery Voltage	: 18 V / 2.0 Ah
No-load Speed	: 0 - 2,800 rpm
Impact Rate	: 0 - 3,600 bpm
Max Torque	: 180 Nm
Head Length	: 170 mm
Dimensions	
Length/Height	: 171 / 234 mm
Motor	: DC
Bit Holder/Shank	: 3/4" Hex; 1/2" Square
LED light	: Yes - above trigger

GDS 250-LI Cordless Impact Wrench (0 601 9G6 1L0)



Capacity	
Battery Voltage	: 18 V / 4.0 Ah
Charger	: AL 18 40 CV
Max Torque	: 250 Nm
No-load Speed	: 0 - 2,400 rpm
Impact Rate	: 0 - 3,300 bpm
Tool Holder	: 1/2" Square (Pin Hole + Retention Ring)
Screw Size	: M10 - M18

GLI 180-LI (Solo)** Cordless Worklight (0 601 4A1 1L0)



Capacity	
Voltage	: 18 V
Brightness in Lumen	: 300 Lm
No. of LED	: 6 Qnt
Runtime	: 300 min / Ah
Dimensions	: 116 x 78 x 163 mm
Weight	: 0.30 kg

18 V Li-Ion Bosch Heavy Duty

GSR 18 V-50 Cordless Drill / Screwdriver (0 601 9H5 0L0)

HEAVY DUTY
1 year warranty*



Capacity	
Battery Voltage	: 18 V / 2.0 Ah
Max. Torque (hard/soft)	: 50 / 28 Nm
Chunk Type	: Metal
No-load speed	: 0-460 / 0-1,800 rpm
Drilling Dia.: In Steel	: 13mm
In Wood	: 35mm
Max. Screw	: 10mm
Charger	: AL 18 V - 40
Charging Time	: 40 mins

GSB 18 V-50 Cordless Impact Drill (0 601 9H5 1L0)

HEAVY DUTY
1 year warranty*



Capacity	
Battery Voltage	: 18 V
Max. Torque (hard/soft)	: 50 / 28 Nm
Chunk Type	: Metal
No-load speed	: 0-460 / 0-1,800 rpm
Drilling Dia.: In Steel	: 13mm
In Wood	: 35mm
In Masonry:	: 13mm
Max. Screw	: 10mm
Charger	: AL 18 V - 40 CV
Charging Time	: 40 mins

GWS 18V-10 Cordless Angle Grinder (0 601 9J4 0L1)

HEAVY DUTY
1 year warranty*



Capacity	
Battery Voltage	: 18 V / ProCore 8.0Ah
No-Load Speed	: 9000 rpm
Max Output Power	: Equivalent to 1000W corded tool (w/PROCORE)
Grip Circumference	: 155mm
Disc	: 100mm (M10)
Weight	: 2KG (Tool only)
Charger	: AL 1880 CV
Charging Time	: 65 mins

GDX 18V-200C Cordless Impact Wrench / Driver (0 601 964 2L0)

HEAVY DUTY
1 year warranty*



Capacity	
Battery Voltage	: 18 V / 4.0Ah
Max. Torque	: 200 Nm
No load Speed	: 1 - 1,100/2,300/3,400 rpm
Impact Rate	: 0 - 2,300/3,400/4,200 rpm
Head Length	: 147 mm
Weight (w/o battery)	: 1.17 kg
Bit Holder/Square Drive	: 1/4" Hex
	: 1/2" Square
Charger	: AL 18 V - 40
Charging Time	: 60 mins

GSR 18 V-60 FC Solo** Cordless Drill / Driver (0 601 9G7 1L0)

HEAVY DUTY
1 year warranty*



Capacity	
Battery Capacity	: 18 V
Drilling Dia.: In Steel	: 13mm
In Wood	: 38 mm
Max. Torque (hard/soft):	: 60 / 31 Nm
No-load speed	: 0 - 6000 / 1,900 rpm
Weight	: 0.9 kg

GDS 18 V-LI HT (Solo)** Cordless Impact Wrench (0 601 9A1 3L4)

HEAVY DUTY
1 year warranty*



Capacity	
Battery Voltage	: 18 V
Torque Max.	: 650 Nm
No-load Speed	: 0 - 1,900 rpm
Impact Rate	: 0 - 2,100 bpm
Screw Diameter	: M12 - M20
Toolholder	: 1/2" External Square
Weight	: 3.0 kg

GDS 18 V-EC 300 ABR Solo** Cordless Impact Wrench (0 601 9D8 281)

HEAVY DUTY
1 year warranty*



Capacity	
Battery Capacity	: 18 V
Max. Torque	: 300 Nm
No-load speed	: 0 - 2,400 rpm
Impact Rate	: 0 - 3,400 bpm
Bolt Size	: M10 - M18
Weight	: 1.85 kg

GLI 18 V-LI VariLED (Solo)** Cordless Torch (0 601 443 400)

HEAVY DUTY
1 year warranty*



Capacity	
Battery Voltage	: 18 V
Luminous Flux	: 420 Lumen
Max. operating time	: 135 mins/Ah
Weight	: 0.3 kg

GLI 18 V-1900 (Solo)** Cordless Torch (0 601 446 400)

HEAVY DUTY
1 year warranty*



Capacity	
Battery Voltage	: 18 V
Max. Brightness	: 1900lm
Dimensions	: 292 x 187 x 69 mm
Runtime	: 100 min / Ah
Weight	: 1.6kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. Terms and Conditions apply. ** Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Separately.

GSA 18 V-LI (Solo)
Cordless Sabre Saw
(0 601 64J 0B1)****HEAVY DUTY**

1 year warranty*



Capacity	
Battery Voltage	: 18 V
Stroke Length	: 28 mm
No-load Stroke	
Rate	: 0 - 2,400 / 0 - 2,700 spm
Weight	: 3.4 kg

GSA 18 V-32 (Solo)
Cordless Sabre Saw
(0 601 6A8 108)****HEAVY DUTY**

1 year warranty*



Capacity	
Battery Voltage	: 18 V
Stroke Length	: 32 mm
No-load Stroke Rate	: 0 - 2,500 spm
Cutting Depth In Wood	: 230 mm
in Metal	: 175 mm
Weight	: 3.5 kg

GST 18 V-LI B (Solo)
Cordless Jigsaw
(0 601 5A6 100)****HEAVY DUTY**

1 year warranty*



Capacity	
Battery Voltage	: 18 V
No-load Stroke Rate	: 0 - 2,700 spm
Stroke Height	: 23 mm
Cutting Depth In Metal	: 8 mm
In Wood	: 120 mm
In Aluminium	: 20 mm
Slanted Cuts	: 0 - 45°
Weight Incl. Battery	: 2.4 kg

GKS 18 V-57 (Solo)
Cordless Circular Saw
(0 601 6A2 2L0)****HEAVY DUTY**

1 year warranty*



Capacity	
Battery Voltage	: 18 V
No-load Speed	: 3,400 rpm
Blade Diameter	: 165 mm
Saw Blade Bore Diameter	: 20 mm
Max. Cutting Capacities at 90°	: 57 mm
at 45°	: 42 mm
Weight	: 4.1 kg

GGG 18 V-LI (Solo)
Cordless Straight Grinder
(0 601 9B5 300)****HEAVY DUTY**

1 year warranty*



Capacity	
Battery Voltage	: 18 V
No-load Speed	: 2 - 22,000 rpm
Toolholder	: Collet up to 8 mm Diameter
Weight	: 1.8 kg

GAS 18 V-1 (Solo)
Cordless Vacuum Cleaner
(0 601 9C6 2L0)****HEAVY DUTY**

1 year warranty*



Capacity	
Battery Voltage	: 18 V
Container Vol.	: 700 ml
Max. Underpressure	: 6 kPa
Max. Airflow	: 10 l/sec
Speeds	: 1 Speed
Runtime	: 7 min / Ah
Weight (w/o batt, w/o AC)	: 1.3 kg

GAS 18 V-10 L (Solo)
Cordless Dust Extractor
(0 601 9C6 300)****HEAVY DUTY**

1 year warranty*



Capacity	
Battery Voltage	: 18 V
Max. Vacuum	: 90 mbar
Maximum Airflow	: 24 l/sec
Max. Runtime with 6.0 Ah Battery	: 24 min
Container Volume, Gross/net	: 10 / 6 Litre
Weight	: 4.6 kg

GBL 18 V-120 (Solo)
Cordless Blower
(0 601 9F5 1L0)****HEAVY DUTY**

1 year warranty*



Capacity	
Battery Voltage	: 18 V
No-load Speed	: 17,000 rpm
Air Speed, Max	: 75 m/s
Air Volume	: 2.0 m³/min
Runtime	: Speed I: 9 min / Ah
	: Speed II: 5 min / Ah
Weight without Cable	: 1.1 kg

GCB 18 V-LI (Solo)
Cordless Band Saw
(0 601 2A0 300)****HEAVY DUTY**

1 year warranty*



Capacity	
Battery Voltage	: 18 V
No-load Speed	: 162 m/min
Saw Blade Diameter	: 733 x 12,7 x 0.5 mm
Max. Cutting Depth	: 63,5 mm
Weight	: 3.8 kg

GHO 18 V-LI (Solo)
Cordless Planer
(0 601 5A0 300)****HEAVY DUTY**

1 year warranty*



Capacity	
Battery Voltage	: 18 V
No-load Speed	: 14,000 rpm
Cutting Depth	: 0 - 1,6 mm
Rebating Depth	: 0 - 8 mm
Planing Width, Max.	: 82 mm
Weight	: 2.6 kg

GSS 18 V-LI (Solo)
Cordless Orbital Sander
(0 601 9D0 2L0)****HEAVY DUTY**

1 year warranty*



Capacity	
Battery Voltage	: 18 V
No-load Speed	: 11,000 rpm
Orbital Rate	: 22,000min-1
Orbital Diameter	: 1,6 mm
Pad Size	: 113 x 101 mm
Sanding Paper Size	: 114 x 140 mm
Weight	: 1.0 kg

GOP 18 V-28 (Solo)
Cordless Multi-Cutter
(0 601 8B6 002)****HEAVY DUTY**

1 year warranty*



Capacity	
Battery Voltage	: 18 V
Oscillation Angle	
Left/Right	: 1,4°
No-load Speed	: 8,000 - 20,000 rpm
Grip Circumference	: 193 mm
Tool Length (without battery)	: 312 mm
Weight	: 2.0 kg

GBH 18 V-26 (Solo)
Cordless Rotary Hammer 3 mode
(0 611 909 000)****HEAVY DUTY**

1 year warranty*



Capacity	
Battery Voltage	: 18 V
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
Impact Energy	: 2.6 J
Rated Speed	: 0 - 890 rpm
Impact Rate	: 0 - 4,350 bpm
Weight	: 3.5 kg

**GDE 18 V-16
Cordless Dust Extractor
(1 600 A00 51M)**

Capacity	
Compatible with	: GBH 18V-26 only
Drilling Diameter	: Max. 16 mm
Max. Drilling	: 100 mm
Weight	: 1.2 kg

36 V Li-Ion Heavy Duty**GBH 36 V-EC Compact
Cordless Rotary Hammer 2 mode
(0 611 903 RL1)****HEAVY DUTY**

1 year warranty*



Capacity	
In Concrete	: 4 - 18 mm
In Steel	: 13 mm
In Wood	: 30 mm
Impact Energy	: 1.7 J
Rated Speed	: 0 - 1,500 rpm
Impact Rate	: 0 - 4,850 bpm
Battery Voltage	: 36 V / 2.0 Ah
Charger	: AL 3640 CV
Charging Time	: 45 mins
Weight	: 2.9 kg

**GBH 36 V-LI Plus
Cordless Rotary Hammer 3 mode
(0 611 906 0L0) / (0 611 906 075)****HEAVY DUTY**

1 year warranty*



Capacity	
In Concrete	: 8 - 28 mm
In Steel	: 13 mm
In Wood	: 30 mm
Impact energy	: 3.2 J
Impact Rate	: 0 - 4,174 bpm
Battery Voltage	: 36 V / 4.0 Ah / 6.0 Ah
Charger	: AL 3680 CV
Charging Time	: 35 mins
Weight	: 4.5 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. Terms and Conditions apply. ** Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Separately.

12 V Li-Ion Battery Pack



GBA 12 V 2.0 Ah
(1 600 A00 F6X)



GBA 12 V 4.0 Ah
(1 600 A00 F71)



GBA 12 V 6.0 Ah
(1 600 A00 X7H)

18 V Li-Ion Battery Pack



GBA 18 V 2.0 Ah
(1 600 A00 1CG)



GBA 18 V 4.0 Ah
(1 600 A00 163)



GBA 18 V 6.0 Ah
(1 600 A00 8AE)

ProCORE 18V Battery Pack



ProCORE 18 V 4.0 Ah
(1 600 A01 6GB)



ProCORE 18 V 8.0 Ah
(1 600 A01 6GK)



ProCORE 18 V 12.0 Ah
(1 600 A01 6GU)

36 V Li-Ion Battery Pack



GBA 36 V 2.0 Ah
(1 600 A00 1ZJ)



GBA 36 V 6.0 Ah
(1 600 A00 L1M)

Charger



GAL 12 V-40
(for 10.8 V & 12 V Battery)
(1 600 A01 B8Z)



GAL 18 V-40
(for 14.4 V & 18 V Battery)
(1 600 A01 9RK)



GAL 1860 CV
(for 14.4 V & 18 V Battery)
(1 600 A00 16Y)



GAL 1880 CV
(for 14.4 V & 18 V Battery)
(1 600 A00 B8H)



GAL 18 V-160 C
(for 18 V Battery)
(1 600 A01 9S7)



GAX 18 V-30
(for 12 V, 14.4 V & 18 V Battery)
(1 600 A01 1AA)

Starter Kit



12 V 2.0 Ah (2 Batteries)
+ GAL 12 V-40 (1 Charger)
(1 600 A01 B8Y)



18 V 2.0 Ah (2 Batteries)
+ GAL 18 V-40 (1 Charger)
(1 600 A01 B91)



18 V 4.0 Ah (2 Batteries)
+ GAL 1860 CV (1 Charger)
(1 600 A00 1B7)

ProCORE 18 V Starter Kit



ProCORE starter kit
18 V 4.0 Ah (2 batteries)
+ GAL 1880 CV (1 charger)
(1 600 A01 6GG)



ProCORE starter kit
18 V 8.0 Ah (2 batteries)
+ GAL 18-160 C (1 charger)
(1 600 A01 6GR)



ProCORE starter kit
18 V 12.0 Ah (2 batteries)
+ GAL 18-160 C (1 charger)
(1 600 A01 6GZ)

L-BOXX



L-BOXX 102
(1 600 A01 2FZ)



L-BOXX 136
(1 600 A01 2G0)



L-BOXX 238
(1 600 A01 2G2)



L-BOXX 374 (Indent)
(1 600 A01 2G3)

Trolley / Roller

L-BOXX Trolley
(1 600 A00 1SA)



L-BOXX Roller
(1 600 A00 1S9)



More power

ProCORE18V:
latest cell technology
and intelligent battery
management.



+87%
more
power*

Power Boost Mode:
get back to work
faster than ever.



9 min.
to 50%²

Longer lifetime

COOLPACK 2.0
technology:
prevents the battery
from overheating.




Up to
135%
longer
lifetime³

* GBA 18V 6.0Ah vs. ProCORE18V 8.0Ah: 860 W vs. 1620 W.

² To reach 50% charge of the ProCORE18V 4.0Ah (in Power Boost Mode). As of May 2019.

³ Vs. no Bosch COOLPACK 2.0 technology.

Charging Time For Battery Capacity (Minute)

	12 V Charger			18 V Charger							36 V Charger	
	GAL 1210 CV (1 600 A00 HR3)	GAL 12V-20	GAL 12 V-40 CV (1 600 A01 B8Z)	AL 1814 CV (2 607 225 729)	GAL 18V-20 (2 607 226 283)	GAL 18 V-40 (1 600 A01 9RK)	GAL 1860 CV (1 600 A00 16Y)	GAL 1880 CV (1 600 A00 BBH)	GAX 18 V-30 (1 600 A01 1AA)	GAL 18 V-160 C (1 600 A01 9S7)	GAL 3680 CV (2 607 225 901)	
												
1.5 Ah	95	50	25					30				
2.0 Ah (1 600 A00 F6X)	120	65	35					45				
4.0 Ah (1 600 A00 F71)	240	125	65					85				
6.0 Ah (1 600 A00 X7H)	360	185	95					130				
1.5 Ah (1 600 A00 1CC)				80	50	30	25	12	-		25	
2.0 Ah (1 600 A00 1CG)				105	65	40	35	15	-		30	
4.0 Ah (1 600 A00 163)				210	125	60	45	35	25		35	
6.0 Ah (1 600 A00 8AE)				-	180	80	65	50	45		55	
4.0 Ah (1 600 A01 6GB)				-	-	-	75	50	-		-	
8.0 Ah (1 600 A01 6GK)				-	-	-	120	65	-		-	
12.0 Ah (1 600 A01 6GU)				-	-	-	-	90	-		60	
2.0 Ah (1 600 A00 1ZU)											30	
6.0 Ah (1 600 A00 LIM)											35	

* Above data is based on approximate charging time



BOSCH

Corded Power Tools Range



GWS 2200 Professional

Highest power output per kilogram weight!

GWS 2200-180 (0 601 8C0 0L0)

GWS 2200-230 (0 601 8C1 0L0)

WHY THIS

- 01 Superior grinding and cutting performance**
Powerful 2,200 Watts motor
- 03 Enhanced operator safety**
Integrated deadman switch
- 05 Increased productivity**
Thanks to the highest material removal rate in the segment

- 02 Enhanced tool lifetime**
Robust components and a sturdy design ensure trouble-free operation under even the toughest conditions
- 04 Segment leading performance and lifetime**
Power by the newly developed Tornado Motor
- 06 Increased carbon brush lifetime**
Because of improved contact with motor & better cooling

TARGET USERS

- Metal fabricators
- General construction workers
- Maintenance workers/renovators/ installers



Highest material removal rate

- New Tornado Motor delivers best in class performance

Longer carbon brush lifetime

- Improved contact with motor delivers longer carbon brush lifetime

Low breakdown

- Lower heating of overall system results in increased tool lifetime



Increased durability

- Redesigned gear housing and high quality bearing ensure robustness

Better tool control

- Optimised weight distribution reduces user fatigue

Accessories			
	Part No. 2 608 603 332 Diamond cutting disc, Expert for Universal, 230mm Optimized diamond grits for high cutting speed. Long lifetime due to 12mm segment height. Safety focused product compliant with EN norms.	Part No. 2 608 608 131 Aluminium oxide fiber sanding disc, 180mm, 25pcs Suitable for fine and coarse sanding for different materials.	Part No. 2 608 603 354 Aluminium oxide flap disc, 180mm Very high material removal rate and long lifetime. Suitable for all metal work.


KEY SPARE PARTS			
	Part no. 1 607 014 171 Carbon Brush	Part no. 1 619 P15 748 Armature	Part no. 1 619 P14 968 Switch Assembly

GWS 2200 Professional	Unit	Specification
Input Power	W	2,200
No-load Speed	rpm	8,500/6,500
Disc Dia.	mm	180/230

GWS 2200 Professional	Unit	Specification
Spindle Size	-	M14
Side Handle	-	Standard straight handle
Weight	kg	5.0


Drill

GBM 320
(0 601 1A4 5L0)



Capacity	
Power Input	: 320 W
In Steel	: 6.5 mm
In Aluminium	: 13 mm
In Wood	: 13 mm
No-load Speed	: 4,200 rpm
Weight	: 1.0 kg


GBM 350
(0 601 1A9 5L0)



Capacity	
Power Input	: 350 W
In Steel	: 10 mm
In Wood	: 20 mm
No-load Speed	: 2,800 rpm
Weight	: 1.2 kg

GBM 10 RE
(0 601 473 5L0)

HEAVY DUTY
1 year warranty*



Capacity	
Power Input	: 450 W
In Steel	: 10 mm
In Aluminium	: 10 mm
In Wood	: 25 mm
No-load Speed	: 0 - 2,600 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.3 kg

GBM 13 RE
(0 601 477 5L0)

HEAVY DUTY
1 year warranty*



Capacity	
Power Input	: 600 W
In Steel	: 13 mm
In Aluminium	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 2,600 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.65 kg

GBM 13 HRE "High Torque"
(0 601 049 603)

HEAVY DUTY
1 year warranty*



Capacity	
Power Input	: 550 W
In Steel	: 13 mm
In Aluminium	: 20 mm
In Wood	: 40 mm
No-load Speed	: 0 - 550 rpm
Torque (Approx.)	: 40 Nm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.1 kg

GBM 32-4
(0 601 130 203)

HEAVY DUTY
1 year warranty*



Capacity	
Power Input	: 1,500 W
In Steel	: 32 mm
In Aluminium	: 50 / 70 mm
4 Speed	: 210 / 330 / 470 / 740 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 7.3 kg

GBM 50-2
(0 601 1B4 0L0)

HEAVY DUTY
1 year warranty*



Capacity	
Power	: 1,200 W
No-load Speed	: 50-255 / 100-510 rpm
Annular Cutter	: Ø50 mm
Max. Twist Drill	: Ø23 mm
Max Thread	: M16
Magnetic Force	: 14,000 N
Weight	: 14.7 kg

Impact Drill

GSB 10 RE
(0 601 216 1L6)

HEAVY DUTY
1 year warranty*



Capacity	
Power Input	: 500 W
In Masonry	: 10 mm
In Steel	: 8 mm
In Wood	: 20 mm
No-load Speed	: 0 - 2,600 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.5 kg

GSB 16 RE
(0 601 228 1L2)

HEAVY DUTY
1 year warranty*



Capacity	
Power Input	: 750 W
In Concrete	: 16 mm
In Steel	: 12 mm
In Wood (hard)	: 25 mm
No-load Speed	: 0 - 3,250 rpm
Impact Rate	: 0 - 48,500 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg

GSB 20-2 RE
(0 601 1A2 1L0)

HEAVY DUTY
1 year warranty*



Capacity	
Power Input	: 800 W
In Concrete	: 20 mm
In Steel	: 13 mm
In Wood	: 40 mm
No-load Speed	: 0 - 1,000 / 3,000 rpm
Impact Rate	: 0 - 16,000 / 48,000 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.6 kg

Multi Cutter

GOP 30-28
(0 601 237 0L0)

HEAVY DUTY
1 year warranty*



Capacity	
Power Input	: 300W
Oscillating amplitude	: 2.8° (2 x 1.4°)
No-load Speed	: 8,000 - 20,000 opm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.5 kg

Foam Cutter

GSG 300
(0 601 575 103)

HEAVY DUTY
1 year warranty*




Capacity	
Power Input	: 350 W
Cutting Capacity	: 300 mm
No-load Stroke Rate	: 3,200 spm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.6 kg

Stirrer / Mixer Drill

GRW 12 E
(0 601 1A7 070)


HEAVY DUTY
1 year warranty*



Capacity	
Power Input	: 1,200 W
Connector Type	: M14 Inside Thread
Max. Paddle Ø	: 140 mm
Incl. Paddle Ø	: 140 mm
No-load Speed	: 0 - 1,000 rpm
Nominal speed	: 0 - 620 min ⁻¹
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 5.3 kg


Straight Grinder

GGG 3000 L
(0 601 224 0L0)



Capacity	
Power Input	: 300 W
Max. Collet Capacity	: 8 mm
No-load Speed	: 28,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.5 kg


GGG 5000 L
(0 601 224 1L0)



Capacity	
Power Input	: 500 W
Max. Collet Capacity	: 8 mm
No-load Speed	: 33,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.4 kg

GGG 28 LC
(0 601 221 070)

HEAVY DUTY
1 year warranty*



Capacity	
Power Input	: 650 W
Max. Collet Diameter	: 8 mm
No-load Speed	: 28,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.6 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. Terms and Conditions apply.

4" Angle Grinder

GG5 28 C
(0 601 220 070)

HEAVY DUTY
1 year warranty*



Capacity	
Power Input	: 650 W
Max. Collet Diameter	: 8 mm
No-load Speed	: 28,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.4 kg

GWS 060
(0 601 375 6L0)




Capacity	
Power Input	: 670 W
No-load Speed	: 12,000 rpm
Spindle Thread	: M10
Disc Diameter	: 100 mm
Weight	: 1.6 kg

GWS 7-100 ET
(0 601 388 5L0)



Capacity	
Power Input	: 720 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Wire Cup Brush Diameter	: 70 mm
No-load Speed	: 2,800 - 9,300 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg

GWS 750-100
(0 601 394 0L0)




Capacity	
Power Input	: 750 W
No-load Speed	: 11,000 rpm
Disc Diameter	: 100 mm
Grip Size	: 59 / 54.5 mm
Perimeter	: 187 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg

GWS 900-100
(0 601 396 0L0)



Capacity	
Power Input	: 900 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Spindle Thread	: M10
No-load Speed	: 11,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg

GWS 900-100 S
(0 601 396 1L0)



Capacity	
Power Input	: 900 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Spindle Thread	: M10
No-load Speed	: 2,800 - 11,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.9 kg

GWS 9-100 P
(0 601 396 5L0)



Capacity	
Power Input	: 900 W
Disc Diameter	: 100 mm
Spindle Thread	: M10
No-load Speed	: 11,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.9 kg

5" Angle Grinder

GWS 13-125 CI
(0 601 79E 002)



Capacity	
Power Input	: 1,300 W
No-load Speed	: 11,500 rpm
Spindle Thread	: M14
Disc Diameter	: 125 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.3 kg

GWS 17-125 CI
(0 601 79G 002)



Capacity	
Power Input	: 1,700 W
No-load Speed	: 11,500 rpm
Spindle Thread	: M14
Disc Diameter	: 125 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.4 kg

GWS 18-125 L (Indent)
(0 601 7A3 0L0)



Capacity	
Power Input	: 1,800 W
No-load Speed	: 12,000 rpm
Spindle Thread	: M14
Disc Diameter	: 125 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.5 kg

6" Angle Grinder

GWS 17-150 CI
(0 601 79K 002)



Capacity	
Power Input	: 1,700 W
No-load Speed	: 9,300 rpm
Spindle Thread	: M14
Disc Diameter	: 150 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.4 kg

Bench Grinder

GBG 35-15
(0 601 27A 3L0)



Capacity	
Power Input	: 350 W
No-load Speed	: 3,000 rpm
Disc Diameter	: 150 mm
Weight	: 10 kg

GBG 60-20
(0 601 27A 4L0)



HEAVY DUTY
1 year warranty*

Capacity	
Power Input	: 600 W
No-load Speed	: 3,600 rpm
Disc Diameter	: 200 mm
Weight	: 15 kg

Jigsaw

GST 700
(0 601 2A7 0L0)



Capacity	
Power Input	: 500 W
Stroke Rate	: 1,450 - 3,200 spm
Cutting Depth in Wood	: 70 mm
Stroke Length	: 20 mm
Weight	: 2.1 kg

GST 80 PBE
(0 601 581 59G)



HEAVY DUTY
1 year warranty*



Capacity	
Power Input	: 580 W
In Wood	: 85 mm
In Metal	: 10 mm
No-load Stroke Rate	: 500 - 3,100 spm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.4 kg

Reciprocating Saw

GSA 120
(0 601 6B1 0L0)



Capacity	
Input Power	: 1,200 W
Stroke Rate	: 0 - 3,000 /min
Stroke Length	: 29mm
Blade Change	: SDS
Max. Cutting Dept in Wood	: 220 mm
in Meta	: 20 mm
Weight	: 3.7 kg

Shear

GSC 2.8
(0 601 506 142)

HEAVY DUTY
1 year warranty*



1 607 031 228

Capacity	
Power Input	: 500 W
In Steel	: 2.8 mm
In Aluminium	: 3.5 mm
No-load Stroke Rate	: 2,400 stroke/min
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.7 kg

Nibbler

GNA 2.0
(0 601 530 103)

HEAVY DUTY
1 year warranty*



1 607 031 228

Capacity	
Power Input	: 500 W
Mild Steel	: 2.0 mm
Stainless Steel	: 1.0 mm
No-load Stroke Rate	: 2,400 stroke/min
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.0 kg

Circular Saw

GKS 600
(0 601 6A9 0L0)



Capacity	
Power Input	: 1,200 W
No-load Speed	: 5,000 rpm
Blade Bore Size	: 20 mm
Diameter	: 165 mm
Cutting depth (90°/45°)	: 55 / 37 mm
Weight	: 3.6 kg

GKS 140
(0 601 6B3 0L0)



Capacity	
Input Power	: 1,400 W
No-load Speed	: 6,000 rpm
Blade Bore Size	: 20 mm
Diameter	: 184 mm
Max. Cutting Dept	: 64+/- mm
Bevel Capacity	: 0 - 45 °

GKS 190
(0 601 623 0L9)

HEAVY DUTY
1 year warranty*



1 619 P06 346

Capacity	
Power Input	: 1,400 W
Blade Diameter	: 184 mm
Max. Cutting Capacities	
at 90°	: 67 mm
at 45°	: 48 mm
No-load Speed	: 5,500 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 4.1 kg

GKS 235 Turbo
(0 601 5A2 0L0)

HEAVY DUTY
1 year warranty*



1 619 P01 685

Capacity	
Power Input	: 2,050 W
Saw Blade Diameter	: 235 mm
Max. Cutting Capacities	
at 90°	: 85 mm
at 45°	: 65 mm
No-load Speed	: 0 - 5,300 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 7.6 kg

Diamond Wheel Cutter

GDC 140
(0 601 3A0 0L0)



Capacity	
Power Input	: 1,400 W
No-load Speed	: 13,200 rpm
Max. Cutting Disc Dia.	: 70 mm
Max. Cutting Depth	: 35 mm
Weight	: 2.9 kg

GDM 13-34
(0 601 36A 2L0)

HEAVY DUTY
1 year warranty*



1 619 P06 304

Capacity	
Power Input	: 1,300 W
Blade Diameter	: 110 mm
Max. Cutting Depth	: 34 mm
Base Plate	: 100 x 190 mm
No-load Speed	: 12,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.8 kg

Cut-off Machine

GCO 220
(0 601 B37 3L0)



Capacity	
Power Input	: 2,200 W
No-load Speed	: 3,800 rpm
Disc Diameter	: 355 mm
Cutting Capacity	
Square Bar	□ : 119 x 119 mm
Round Bar	○ : 129 mm
Soft Start	: No
Weight	: 14 kg

GCO 14-24 J
(0 601 B37 2L0)

HEAVY DUTY
1 year warranty*



1 607 014 171

Capacity	
Power Input	: 2,400 W
Saw Blade Diameter	: 355 mm
Saw Blade Bore	: 25.4 mm
No-load Speed	: 3,800 rpm
Cutting Capacity	
□	: 100 x 196 mm
□	: 119 x 119 mm
└	: 130 x 130 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 18.1 kg

Mitre Saw

GCM 10 MX
(0 601 B29 0L0)

HEAVY DUTY
1 year warranty*



1 607 014 171

Capacity	
Power Input	: 1,700 W
Blade Size	: 255 mm
Arbour Size	: 25.4 mm
No-load Speed	: 4,800 rpm
Max Mitre	: 45° L / 52° R
Max. Cutting Capacity	: 89 x 89 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 13.5 kg

GCM 12 GDL
(0 601 B23 670)

HEAVY DUTY
1 year warranty*



2 610 021 311

Capacity	
Power Input	: 2,000 W
Blade Size	: 305 mm
Arbour Size	: 30 mm
No-load Speed	: 3,800 rpm
Max. Mitre	: 52° L / 60° R
Cutting Capacity	: 104 x 341 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 32.1 kg

Slide Mitre Saw

GCM 8 SJL
(0 601 B19 1L0)

HEAVY DUTY
1 year warranty*



1 609 B03 790

Capacity	
Power Input	: 1,600 W
Blade Size	: 216 mm
Bore Size	: 25.4 mm
No-load Speed	: 5,500 rpm
Max. Miter	: 52° L / 60° R
Cutting Capacity	: 70 x 312 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 17.3 kg

Mitre Saw Stand

T1B
(0 601 B12 310)



Capacity	
Length of Work Bench without Extension	: 1,220 mm
Length of Work Bench with extension	: 2,630 mm
Weight	: 15 kg / 19 kg

Table Saw

GTS 10 J
(0 615 990 L9D)

HEAVY DUTY
1 year warranty*



2 610 018 332

Capacity	
Power Input	: 1,800 W
Saw Blade Diameter	: 254 mm
Bevel Setting	: 47° L / 2° R
Cutting Capacity (Right)	: 460 mm
(Left)	: 210 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 26 kg

Table Saw Stand

GTA 600




Capacity	
Table Height	: 602 mm
Max. Length Extension	
Unfolded	: 450 x 520 (D x L)
Max. Load Capacity	: 60 kg
Weight	: 6.3 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. Terms and Conditions apply.

12V Cordless

Eccentric Sander**GEX 125-1 A / GEX 125-1 AE**
(0 601 387 0L0) / (0 601 387 5L0)**HEAVY DUTY**
1 year warranty*

Capacity	
Power Input	: 250 W
No-load Speed	: 7,500 - 12,000 rpm
Oscillating Circuit	
Diameter	: 2.5 mm
Orbit Rate	: 15,000 - 24,000 opm
Sanding Plate	: 125 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.3 kg

Planer**GHO 6500**
(0 601 596 0L0)

Capacity	
Power Input	: 650 W
No-load Speed	: 16,500 rpm
Adjustable Chip Thickness	: 0 - 2.6 mm
Adjustable Rebating Depth	: 0 - 9 mm
Weight	: 2.8 kg

GHO 10-82
(0 601 594 006)

Capacity	
Power Input	: 710 W
Planing Width	: 82 mm
Planing Depth	: 0 - 1.0 mm
No-load Speed	: 16,500 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.5 kg

Belt Sander**GBS 75 A**
(0 601 274 004)

Capacity	
Power Input	: 710 W
No-load Belt Speed	: 300 m/min
Sanding Surface	: 75 x 130 mm
Belt Size	: 75 x 533 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.2 kg

18V Cordless

Drill, Impact Drill, Multi-Cutter, Straight Grinder

Polisher**GPO 950**
(0 601 3A2 0L0)

Capacity	
Power Input	: 950 W
Adaptor Size	: M14 / M16
Rubber Sanding Plate, Diameter	: 180 mm
Variable Speed	: 600 - 2,100 rpm
Weight	: 5.5 kg

GPO 12 CE
(0 601 389 0L0)

Capacity	
Power Input	: 1,250 W
No-load Speed	: 750 - 3,000 rpm
Polishing Disc Diameter	: 180 mm
Thread of Polishing Spindle	: M14
Tool Length	: 450 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.5 kg

Orbital Sander**GSS 140**
(0 601 2A8 0L0)

Capacity	
Power Input	: 220 W
No-load Speed	: 14,000 rpm
No-load Orbital Stroke Rate	: 28,000 min ⁻¹
Orbital Diameter	: 1.5 mm
Sanding Sheet Dimension	: 114 x 140 mm
Sanding Plate Dimension	: 101 x 112 mm
Weight	: 1.2 kg

GSS 2300
(0 601 298 0L0)

Capacity	
Power Input	: 190 W
No-load Speed	: 12,000 rpm
Weight	: 1.5 kg

Angle Grinder

Bench Grinder, Sabre Saw

Jigsaw, Circular Saw

Trimming / Router**GKF 550**
(0 601 6A0 0L0)

Capacity	
Power Input	: 550 W
No-load Speed	: 33,000 rpm
Bix Size	: 6 mm / 1/4"
Weight	: 1.4 kg

Glue Gun**GKP 200 CE**
(0 601 950 703)

Capacity	
Gluing Capacity	: 30 g/min
No. of Heating Elements	: 2
Warming Up Time	: 4 min
Glue Stick Length	: 200 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 0.4 kg

Hot Air Gun**GHG 18-60**
(0 601 2A6 1L0)

Capacity	
Power Input	: 1,800 W
Temperature	: 50 / 400 / 600 °C
Air Flow Rate	: 250 / 350 / 600 l/min
Weight	: 0.52 kg

GHG 20-63
(0 601 2A6 2L0)

Capacity	
Power Input	: 2,000 W
Temperature	: 50 - 630 °C
Air Flow Rate	: - 150 / 300 / 500 l/min
Weight	: 0.65 kg

Diamond Cutter, Cut-off machine

Mitre Saw, Table Saw, Planer, Sander

Polisher, Router

Blower**GBL 620**
(0 601 980 5L0)

Capacity	
Power Input	: 620 W
No-load Speed	: 16,000 rpm
Air Flow Rate	: 3.5 m ³ /min
Weight	: 1.7 kg

GBL 82-270
(0 601 980 4L1)

Capacity	
Power Input	: 800 W
No-load Speed	: 0 - 16,000 rpm
Air Flow Rate	: 0 - 4.5 m ³ /min
Weight	: 1.8 kg

Wet & Dry Vacuum Cleaner**GAS 15**
(0 601 9E5 0L0)

Capacity	
Power Input	: 1,100 W
Container (gross/net)	: 15 / 8 litre
Air Flow Max.	: 33 l/sec
Max. Vacuum Pressure	: 22 kPa
Weight	: 6 kg

GAS 12-25 PL
(0 601 97C 1L0)

Capacity	
Power Input	: 1,250 W
Container (gross/net)	: 25/21 litre
Air Flow Max.	: 33 l/sec
Max. Vacuum Pressure	: 200 mbar
Weight	: 9.0 kg

Hot Air Gun, Blower, Vacuum

Rotary Hammer

Demolition Hammer

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. Terms and Conditions apply.

High Pressure Washer

GHP 5-13 C
(0 600 910 070)



Capacity	
Motor Power	: 2,300 W
Maximum Pressure	: 140 Bar
Maximum Flow Rate	: 520 l/h
Hose Length	: 8 m
Voltage	: 220 - 240 V
Frequency	: 50 Hz
Weight	: 16.5 kg

2 kg Rotary Hammer

GBH 2-24 DRE
(0 611 272 1L0/ 0L4)



Capacity	
Power Input	: 790 W
Impact Energy	: 2.7 J
In Concrete	: 4 - 24 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 920 rpm
Impact Rate	: 0 - 4,100 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.8 kg

GBH 2-24 DFR
(0 611 273 0L1)



Capacity	
Power Input	: 790 W
Impact Energy	: 2.7 J
Drilling Capacity	: 4 - 24 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 1,300 rpm
Impact Rate	: 0 - 4,200 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.8 kg

GBH 2-26 DRE
(0 611 253 76C)



Capacity	
Power Input	: 800 W
Impact Energy	: 2.7 J
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.7 kg

GBH 2-26 DFR
(0 611 254 76C)



Capacity	
Power Input	: 800 W
Impact Energy	: 2.7 J
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.9 kg

GBH 2-28 DFV
(0 611 267 2L1)



Capacity	
Power Input	: 820 W
Impact Energy	: 3.2 J
In Concrete	: 4 - 28 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 1,300 rpm
Impact Rate	: 0 - 5,100 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.1 kg

3 kg Rotary Hammer

GBH 3-28 DFR
(0 611 24A 0L0)



Capacity	
Power Input	: 800 W
Impact Energy	: 3.1 - 3.5 J
In Concrete	: 28 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.6 kg

4 kg Rotary Hammer

GBH 4-32 DFR
(0 611 332 1L0)



Capacity	
Power Input	: 900 W
Impact Energy	: 4.2 J
In Concrete	: 32 mm
In Steel	: 13 mm
In Wood	: 32 mm
No-load Speed	: 0 - 760 rpm
Impact Rate	: 0 - 3,600 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 4.7 kg

Rotary Hammer with SDS-Max

GBH 5-40 D
(0 611 269 0L0)



Capacity	
Power Input	: 1,100 W
Impact Energy (EPTA)	: 8.5 J
Max. App. in core cutter	: 90 mm
No-load Speed	: 170 - 340 rpm
Impact Rate	: 1,500 - 2,900 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 6.8 kg

GBH 5-40 DCE
(0 611 264 070)



Capacity	
Power Input	: 1,150 W
Impact Energy	: 2-11 J
Impact Rate	: 1,500 - 3,050 bpm
No-load Speed	: 170 - 340 rpm
Drilling Dia Concrete	: 12 - 40 mm
Vibration Values Drilling	
/Chiselling	: 10.5 / 7 / 5 m/s ²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 6.8 kg

GBH 8-45 D
(0 611 265 1L0)



Capacity	
Power Input	: 1500 W
Impact Rate	: 1,380 - 2,760 bpm
Impact Energy	: 12.5 J
Drilling Dia Concrete	: 12 mm - 45 mm
Rated Speed	: 150 - 305 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 8.5 kg

GBH 8-45 DV
(0 611 265 0L0)



Capacity	
Power Input	: 1500 W
Impact Rate	: 1,380 - 2,760 bpm
Impact Energy	: 12.5 J
Drilling Dia Concrete	: 12 mm - 45 mm
Vibration Values	
Drilling / Chiselling	: 8/7 m/s ²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 8.5 kg

Demolition Hammer

GSH 500 GEN II
(0 611 338 6L0)



Capacity	
Power Input	: 1,100 W
Impact Energy- EPTA Value	: 7.8J
Impact Rate	: 2,900 bpm
Tool holder	: Hex
Auxiliary Handle	: Straight Handle
Weight	: 5.6 kg

GSH 3 E
(0 611 320 703)



Capacity	
Power Input	: 650 W
Impact Rate	: 0-3,500 bpm
Impact Force	: 4.3 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.5 kg

GSH 5 (MAX)
(0 611 337 0L0)



Capacity	
Power Input	: 1,100 W
Impact rate	: 2,850 bpm
Impact Energy	: 7.5 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 5.6 kg

GSH 5 CE
(0 611 321 0L0)



Capacity	
Power Input	: 1,150 W
Impact Rate	: 1,300 - 2,900 bpm
Impact Force	: 2 - 13 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 6.2 kg


* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. Terms and Conditions apply.

12V Cordless
18V Cordless
Drill, Impact Drill, Multi-Cutter, Straight Router
Angle Grinder
Bench Grinder, Sabre Saw
Jigsaw, Circular Saw
Diamond Cutter, Cut off machine
Mitre Saw, Table Saw, Planer, Sander
Polisher, Router
Hot Air Gun, Blower, Vacuum
Rotary Hammer
Demolition Hammer

12V Cordless

**GSH 9 VC
(0 611 322 0L0)**

HEAVY DUTY
1 year warranty*



Capacity	
Power Input	: 1,500 W
Impact Force	: 13 J
Vibration Value	: 9.5 m/s ²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 8.5 kg

**GSH 11 E
(0 611 316 8L1)**


HEAVY DUTY
1 year warranty*



Capacity	
Power Input	: 1,500 W
Impact Energy	: 16.8 J
Impact Rate	: 900 - 1,890 bpm
Vibration Value	: 18.5 m/s ²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 10.2 kg

**GSH 11 VC
(0 611 336 0L0)**


HEAVY DUTY
1 year warranty*



Capacity	
Power Input	: 1,700 W
Impact Rate	: 900 - 1,700 bpm
Impact Force	: 23 J
Vibration Values Chiselling	: 8 m/s ²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 11.4 kg

**GSH 16-30 (HEX)
(0 611 335 1L0)**

HEAVY DUTY
1 year warranty*



Capacity	
Power Input	: 1,750 W
Impact Rate	: 1,300 bpm
Impact Force	: 45 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 16.5 kg

18V Cordless

Drill, Impact Drill, Multi-Cutter, Straight Grinder

Angle Grinder

**GSH 27 VC (Hex 25mm)
(0 611 30A 070)**

HEAVY DUTY
1 year warranty*



Capacity	
Power Input	: 2,000 W
Impact Rate	: 1,000 bpm
Impact Force	: 69 J
Vibration Values Chiselling	: 8.5 m/s ²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 29.5 kg



Bench Grinder, Sabre Saw

Jigsaw, Circular Saw

Diamond Cutter, Cut off machine

Mitre Saw, Table Saw, Planer, Sander

Polisher, Router

Hot Air Gun, Blower, Vacuum

Rotary Hammer

Demolition Hammer

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. Terms and Conditions apply.



Dust Free Solution

The Click & Clean System is not only perfectly thought through, it is also really easy to use: connect the dust extractor and start working! This overview offers you a helpful guide to the tools, part numbers and extras such as adapters and accessories. You will also find mobile solutions for individual systems.














Listed adapters need to work with vacuum cleaner unless special remarked

Product	Model / Application	Adapter No.	Adapter Picture	Application Picture
GWS Series  *T: Guard assembly Toolless *EA: Easy Adjust *FC: Full Coverd	Disc 100 mm Disc 115 / 125 mm Keyless	2 608 000 629 2 605 510 224		
	Disc 115 / 125 mm Max. cutting depth 25 mm	GDE 125 EA-T 1 600 A00 3DJ		
	Disc 125 mm Max. cutting depth 25 mm Disc 230 mm Max. cutting depth 60 mm	GDE 125 FC-T 1 600 A00 3DK GDE 230 FC-T 1 600 A00 3DM		
GSB Series 	For all GSB & GBH Holes Ø4-36 mm	Dust Cup 1.600.A00.D6H Work without vacuum	 	
	Holes or core cutter Ø4-24 mm	GDE 24 1 600 A01 M9V Work with or without vacuum		
	For all GSB & GBH & GBM Holes or core cutter Ø4-68 mm Holes or core cutter Ø24-162 mm	GDE 68 1 600 A00 1G7 GDE 162 1 600 A00 1G8	 	
GBH Series 	For 50 mm collar tool Holes Ø4-16 mm Or max 82 mm core cutter (Interchangeable adapter included)	GDE 16 Plus 1 600 A00 15Z		
	Only for GBH 18V-26 Holes Ø4-16 mm	GDE 18V-16 1 600 A00 51M *Self vacuum		
GSH Series 	For chiselling Max length 600 mm	GDE Max 1 600 A00 1G9		
	For breaking	GDE HEX 1 600 A00 1GA		
GST Series 	GST 12 V-LI GST 700	1 619 P10 585 Dust adapter included		
GKS Series 	GKS 190	1 619 P06 204		
	GKS 7000	1 619 P11 691		
	GKS 12 V-LI	1 619 P13 436		
	GKS 66 X / GKS 18 V-57	1 619 P11 691		

Rotary Hammers application overview

Masonry: ■ Optimal ■ Total range of all application
















Concrete: ■ Optimal ■ Total range of all application

Products		Drilling diameter in concrete, masonry (mm)																												Drilling in wood (mm)				Drilling in steel (mm)	
		4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	up to 20	20-25	25-30	30-40	up to 10	10-13			
2 kg Hammers	 GBH 2-24 DRE Professional	[Red bar from 4 to 24]																								[Dark blue bar from 4 to 24]				[Dark blue bar from 20 to 30]				[Light blue bar from 10 to 13]	
	 GBH 2-24 DFR Professional	[Red bar from 4 to 24]																								[Dark blue bar from 4 to 24]				[Dark blue bar from 20 to 30]				[Light blue bar from 10 to 13]	
	 GBH 2-26 DRE Professional	[Red bar from 4 to 26]																								[Dark blue bar from 4 to 26]				[Dark blue bar from 20 to 30]				[Light blue bar from 10 to 13]	
	 GBH 2-26 DFR Professional	[Red bar from 4 to 26]																								[Dark blue bar from 4 to 26]				[Dark blue bar from 20 to 30]				[Light blue bar from 10 to 13]	
	 GBH 2-28 DFV Professional	[Red bar from 4 to 28]																								[Dark blue bar from 4 to 28]				[Dark blue bar from 20 to 30]				[Light blue bar from 10 to 13]	
2 kg Cordless Hammers	 GBH 180-LI Professional	[Red bar from 4 to 18]																								[Dark blue bar from 4 to 18]				[Dark blue bar from 20 to 30]				[Light blue bar from 10 to 13]	
	 GBH 18 V-26 Professional	[Red bar from 4 to 26]																								[Dark blue bar from 4 to 26]				[Dark blue bar from 20 to 30]				[Light blue bar from 10 to 13]	
	 GBH 36 V-LI PLUS Professional	[Red bar from 4 to 26]																								[Dark blue bar from 4 to 26]				[Dark blue bar from 20 to 30]				[Light blue bar from 10 to 13]	
	 GBH 36 V-LI Compact Professional	[Red bar from 4 to 18]																								[Dark blue bar from 4 to 18]				[Dark blue bar from 20 to 30]				[Light blue bar from 10 to 13]	
3 kg Hammer	 GBH 3-28 DFR Professional	[Red bar from 4 to 28]																								[Dark blue bar from 4 to 28]				[Dark blue bar from 20 to 30]				[Light blue bar from 10 to 13]	
4 kg Hammer	 GBH 4-32 DFR Professional	[Red bar from 4 to 32]																								[Dark blue bar from 4 to 32]				[Dark blue bar from 20 to 30]				[Light blue bar from 10 to 13]	
5 kg Hammer	 GBH 5-40 DCE Professional	[Red bar from 10 to 40]																								[Dark blue bar from 10 to 40]				[Dark blue bar from 20 to 30]				[Light blue bar from 10 to 13]	
8 kg Hammer	 GBH 8-45 D / DV Professional	[Red bar from 10 to 45]																								[Dark blue bar from 10 to 45]				[Dark blue bar from 20 to 30]				[Light blue bar from 10 to 13]	

■ Optimal ■ Possible

■ Optimal ■ Possible

● Drilling ● Chiselling

Drilling with hole saws in wood (mm)				Core cutting application in masonry, concrete (mm)				Material for drilling						Other characteristics		
up to 30	30-40	40-50	50-70	40-68	68-82	82-90	90-150	Reinforced concrete, granite, stone	Concrete	Bricks, hollow blocks	Hard wood	Soft wood	Metal	Drilling/Chiselling ratio	Working direction	Special features
■	■			■				■	■	■	■	■	■	● 90% ● 10%	↕	
■	■			■				■	■	■	■	■	■	● 90% ● 10%	↕	Quick change chuck
■	■	■		■				■	■	■	■	■	■	● 90% ● 10%	↕	
■	■	■		■				■	■	■	■	■	■	● 90% ● 10%	↕	Quick change chuck
■	■	■		■	■			■	■	■	■	■	■	● 90% ● 10%	↕	Quick change chuck 
■				■				■	■	■	■	■	■	● 90% ● 10%	↕	 
■	■	■		■				■	■	■	■	■	■	● 90% ● 10%	↕	  
■	■	■		■				■	■	■	■	■	■	● 90% ● 10%	↕	 
■	■	■		■				■	■	■	■	■	■	● 100%	↕	  
■	■	■		■	■			■	■	■	■	■	■	● 80% ● 20%	↕	Quick change chuck 
■	■	■		■	■	■		■	■	■	■	■	■	● 70% ● 30%	↕	Quick change chuck 
				■	■	■		■	■	■				● 60% ● 40%	↕	
				■	■	■	■	■	■	■				● 50% ● 50%	↕	 Anti Vibration for GBH 8-45 DV only

Demolition Hammers application overview

■ Optimal ■ Possible

		Specification								
		Power	Weight	Impact energy	Tool holder	Working direction	Wall tile removal	Floor tile removal	Joint repair (removal of excess concrete)	De-plastering (removing cement plaster from the walls)
										
	GSH 3 E Professional	650 W	3.5 kg	4.3 J			■	■	■	■
	GSH 5 Professional	1100 W	5.6 kg	7.5 J			■	■	■	■
	GSH 500 (GEN II) Professional	1100 W	5.5 kg	6.8 J	17 mm Hex		■	■	■	■
	GSH 5 CE Professional	1150 W	6.2 kg	2-13 J			■	■	■	■
	GSH 9 VC Professional	1500 W	8.5 kg	13 J			■	■	■	■
	GSH 11 E Professional	1500 W	10.1 kg	6-25 J				■	■	■
	GSH 11 VC Professional	1700 W	11.4 kg	23 J				■	■	■
	GSH 16-30 Professional	1750 W	16.7 kg	45 J	30 mm Hex					
	GSH 27 VC Professional	2000 W	29.5 kg	69 J	28 mm Hex					
Accessories		Pointed chisel	SDS plus/SDS max/Hex 17/Hex 28/Hex 30				■	■	■	■
		Flat chisel	SDS plus/SDS max/Hex 17/Hex 28/Hex 30				■	■	■	■
		Tile chisel	SDS plus/SDS max				■	■		
		Spade chisel	SDS plus/SDS max/Hex 28/Hex 30				■	■	■	■
		Gouging chisel	SDS plus/SDS max							
		Bush hammer head	SDS max							
		Asphalt cutter	SDS max							
		Tamping plate	SDS max/Hex 28/Hex 30							
	Excavation chisel	SDS max/Hex 30								

Application

Roughing of concrete walls, columns	Wall chasing or groove cutting on masonry, cement blocks, concrete walls	Concrete wall corrections	Column & beam corrections (removing bulge, exposing re-forcements)	Making cut outs or breaches in masonry wall	Hacking of concrete & masonry walls (heavy duty)	Demolition of concrete floor, slabs	Foundation breaking, pavement breaking	Road works (Restoration of Asphalt coverings)	Digging in hard compacted soil	Compacting earth & gravel
	■									
■	■	■	■	■	■					
■	■	■	■	■	■					
■	■	■	■	■	■					
■	■	■	■	■	■					
■			■	■	■	■	■	■		
■			■	■	■	■	■	■		
						■	■	■	■	■
		■	■	■	■	■	■	■		
	■	■	■	■	■	■	■	■		
■	■									
■										
								■		
										■
								■		



BOSCH

Measuring Tools Range





BOSCH

3 X 360° GREEN LINE LASER – ALL-ROUND LEVELLING SOLUTION

The GLL 3-60 XG Professional

It's in your hands. Bosch Professional Measuring Tools.



bosch-pt.asia

NEW!

GLL 3-60 XG Professional

3 x 360° Green line laser – All-round levelling solution

WHY THIS

01

All-round solution

3 x 360° green line laser with 1 horizontal and 2 vertical lines for your everyday levelling needs

02

Visible


Up to 4 times more visible to human eyes compared to red laser thanks to Bosch green laser technology

03

Compact

Slim cone mirror and turret design designated to fulfil various applications including evening concrete plaster

HIGHLIGHTS

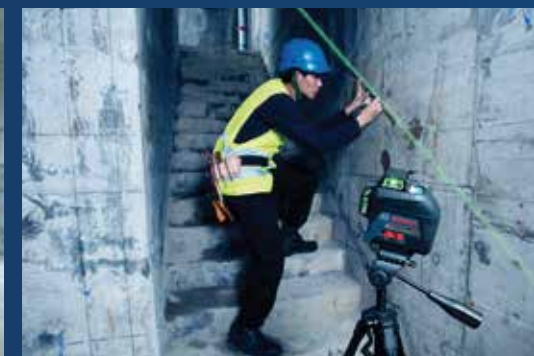

TARGET USERS : Carpenters | Drywall constructors | Electricians | Floor layers | Plumber | Joiner

Visible

Up to 4 times more visible to human eyes compared to red laser thanks to Bosch green laser technology

All-round solution

3 x 360° green line laser with 1 horizontal and 2 vertical lines for your everyday levelling needs

Compact

Slim cone mirror and turret design designated to fulfil various applications including evening concrete plaster

Robust

IP 54 rated against splash water and dust together with pendulum lock mechanism for extra protection

Levelled assurance

Signal tone function with warning signal if deviation by more than 3° in self-levelling mode



Optional accessories:



Laser Receiver LR 7

0.601.069.J00



Universal Mount BM 1

0.601.015.A01



Laser Glasses

1.608.M00.05J



Tripod BT 150

0.601.096.B00

GLL 3-60 XG Professional

Unit

Specifications

Part number	-	0.601.063.ZK0
Working range	m	30 (radius)
Working range (with laser receiver)	m	60 (radius)
Levelling accuracy	mm/m	± 0.3*
Self levelling range	°	± 3
Tripod thread size	"	1/4 & 5/8
Dust and splash water protection	-	IP 54
Laser class	-	2
Laser type	nm, mW	500 - 540, <10
EPTA weight	kg	0.78
Dimensions	mm	149 x 84 x 142
Power supply	-	4 x 1.5V LR6 (AA) batteries
Scope of delivery	-	Protective bag, hard carrying case, 4 x AA alkaline batteries, target plate

* plus use-dependent deviation (levelling accuracy)

Laser Rangefinder, GLM 150 C
 Inspection Camera, Detector, GIC 400 C
 Thermo Detector, Laser, GLL 3-80 CG
 Electronic Line Laser, Conbi Laser,
 Rotation Laser, Tile
 Laser, Optical Level
 Angle Measurer, Digital Inclinator
 Laser Receiver, Tripod,
 Optical Level
 Measuring Rod
 Bracket, Accessories

Laser Rangefinder

GLM 30
(0 601 072 5K0)



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.15 - 30 m
Measuring Accuracy	: ± 2.0 mm
Measuring Units	: m / ft
Batteries	: 2 x 1.5 V LR03(AAA)
Weight	: 0.1 kg

GLM 40
(0 601 072 9K0)



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.15 - 40 m
Measuring Accuracy	: ± 2.0 mm
Measuring Units	: m / ft
Batteries	: 2 x 1.5 V LR03(AAA)
Weight	: 0.1 kg

GLM 400
(0 601 072 RK0)



NEW!



Capacity	
Laser Diode	: 635 nm, < 1 mW
Measurement Range	: 0,05 – 40,00 m
Measurement Accuracy, Typical	: ±1.5 mm
Weight	: approx. 0,1 kg



GLM 500
(0 601 072 HK0)



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 50 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: m, cm, ft, in
Batteries	: 2 x 1.5V LR03 (AAA)
Weight	: 0.1 kg

GLM 50 C
(0 601 072 CK0)



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 50 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: m, ft, in
Batteries	: 2 x 1.5 V LR03(AAA)
Weight	: 0.1 kg

GLM 80
(0 601 072 370)



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 80 m
Measuring Accuracy	: ± 1.5mm
Measuring Units	: mm, cm, m, ft, in
Batteries	: Lithium-Ion
Weight	: 0.14 kg



GLM 100
(0 601 072 P40)



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 100 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: m, cm, ft, in
Batteries	: Lithium-Ion
Weight	: 0.14 kg

GLM 150 C
(0 601 072 FK0)



Capacity	
Laser Diode	: 650 nm, <1mW
Measuring Range	: 0.08 - 150 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: m, cm, ft, in
Batteries	: 3 x 1.5V LR03 (AAA)
Weight	: 0.21 kg

GLM 250 VF
(0 601 072 170)



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 250 m
Measuring Accuracy	: ± 1 mm
Measuring Units	: m, cm, ft, in
Batteries	: 4 x 1.5 V LR03(AAA)
Weight	: 0.24 kg



Cordless Inspection Camera

GIC 120
(0 601 241 100)



Capacity	
Batteries	: 4 x 1.5 V (AA)
Display size	: 2.7"
Display Resolution	: 320 x 240 px
Dia. of camera head	: 8.5 mm
Length of camera cable	: 120 cm
Weight	: 0.5 kg

GIC 120 C
(0 601 241 2K0)



Capacity	
Batteries	: 4 x 1.5 V (AA) or 10.8 V-LI
Display size	: 3.5"
Display resolution	: 320 x 240 px
SD card storage	: Yes
Photo & video mode	: Yes
Dia. of camera head	: 8.5 mm
Length of camera cable	: 120 cm
Weight	: 0.6 kg

Detector

GMS 120
(0 601 081 000)



Capacity	
Max. Measuring Depth	: 120 mm
Live cables	: 50 mm
Wooden beams	: 38 mm
Metal (magnetic)	: 120 mm
Metal (non-magnetic)	: 80 mm
Batteries	: 1 x 9 V 6LR61
Weight	: 0.27 kg

D-TECT 120
(0 601 081 3K0)



Capacity	
Detection Mode	: Universal, Concrete, Drywall
Detection Object	: Ferrous metals, non-ferrous metals, live cables, wooden objects and water-filled plastic pipes
Max. Detection Depth	: 120 mm
Accuracy	: ± 10 mm
Batteries	: 4 x 1.5 V LR6(AA) or 10.8 V
Weight, approx	: 0.5 kg

* The working range can be decreased by unfavorable environment conditions (eg. Direct sun irradiation).

Thermo Detector

D-tect 150 SV
(0 601 010 008)



Capacity	
Max. Measuring Depth:	150 mm
Accuracy	: ± 5 mm
Batteries	: 4 x 1.5V LR6(AA)
Detectable Materials	: Plastic pipes, cables of all kinds, ferrous/non-ferrous metals, wood, cavities.
Weight	: 0.7 kg

GIS 500 PROFESSIONAL
(0 601 083 4)



Capacity	
Measurement Range*	: -30°C to +500°
Measurement Accuracy	: ±1.8°C / ±2.8°C
Emissivity gradings	: 0.95, 0.85, 0.75
D:S ratio	: 12:1
Display Size	: 36 mm x 25 mm
Power Supply	: 2 x 1.5V LR6 (AA)
Scope of Delivery	: 2 x AA battery, pouch

GIS 1000 C
(0 601 083 340)



Capacity	
Laser Diode	: 635 nm, <1mW
Working Range*	: 0.1 - 5 m
Measuring Range*	: - 40°C to + 1000°C
Measuring accuracy	: ± 1.0°C (0°C - 100°C)
Batteries	: 4 x 1.5 V LR6(AA) / 10.8 V
Relative Humidity	: 0 - 100 %
Accuracy	: ± 2 %
Storage Medium	: 200 images
Weight	: 0.6 kg

GTC 400 C
(0 601 083 150)



Capacity	
Resolution of infrared sensor	: 160 x 120
Thermal Sensitivity	: < 50 mK
Field of View	: 53° x 43°
Focus Distance	: ≥ 0.3 m
Temperature Range	: -10 ~ +400°C
Measurement Accuracy	: ± 3°C
Weight	: 0.54 kg

Line Laser

GLL 3-80
(0 601 063 S00)



Capacity	
Laser Diode	: 640 nm, <1mW
Working Range*	: 30 m
Working Range	
With Receiver*	: 5 - 120 m (diameter)
Leveling Accuracy*	: ± 0.2 mm / m
Plane	: 3
Tripod Mount	: 1/4", 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 0.76 kg

GLL 3-80 CG
(0 601 063 U80)



Capacity	
Laser Class and Type:	Class 2 (500 - 540 nm, <10mW)
Working Range*	: 5 - 120 m
Leveling Accuracy*	: ± 0.2 mm / m
Self-levelling Range	: ± 4°
Tripod Mount	: 1/4 & 5/8"
Batteries	: 4 x 1.5 V LR6(AA) or 10.8 V / 12 V Li-Ion Battery
Weight	: 0.5 kg

GLL 30 G
(0 601 063 V80)



Capacity	
Laser Diode	: 500 - 540 nm, <5mW
Working Range	: 10 m
Leveling Accuracy*	: ± 4°
Tripod Mount	: 1/4"
Batteries	: 2 x 1.5 V LR6(AA)
Weight	: 0.25 kg



GLL 3-15 X (Bare)
(0 601 063 M80)



Capacity	
Laser Diode	: 630 - 650 nm, <1mW
Working Range*	: 15 m
Leveling Accuracy*	: ± 0.2 mm / m
Self-levelling Range	: ± 3°
Tripod Mount	: 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 0.5 kg

GLL 5-50 X (Kit Set)
(0 601 063 N81)



Capacity	
Laser Diode	: 630 - 650 nm, <1mW
Working Range*	: 15 m
Working Range	
With Receiver*	: 5 - 50 m
Leveling Accuracy*	: ± 0.2 mm / m
Self-levelling Range	: ± 3°
Tripod Mount	: 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 0.5 kg

GLL 8-40 E
(0 601 063 HB1)



Capacity	
Laser Diode	: 635 - 650 nm, <1mW
Working Range*	: 15 m
Working Range With Receiver*	: 40 m
Leveling Accuracy	: ± 0.1 mm / m
Self-levelling Range	: ± 3°
Tripod Mount	: 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 1.1 kg



Combi Laser

GCL 2-15 G
(0 601 066 J00)



Capacity	
Laser Diode	: 500 - 540 nm, <10mW, 635 - 650 nm, <1mW
Working Range*	: 15 m
Dust and splash protection	: IP 54
Leveling Accuracy	: ± 0.3 mm / m
Self-levelling Range	: ± 4°
Tripod Mount	: 1/4", 5/8"
Batteries	: 3 x 1.5 V LR6 (AA)
Weight	: 0.49 kg

GCL 2-50 CG
(0 601 066 H80)



Capacity	
Laser Diode	: 500 - 540 nm, <10mW, 635 - 650 nm, <1mW
Working Range*	: 50 m
Dust and splash protection	: IP 54
Leveling Accuracy	: ± 0.3 mm / m
Self-levelling Range	: ± 4°
Tripod Mount	: 1/4"
Batteries	: 4 x 1.5 V (AA) or Bosch Li-Ion 10.8 V / 12 V Li-Ion Battery
Weight	: 0.58 kg

Rotation Laser

GRL 300 HVG
(0 601 061 703)



Capacity	
Laser Diode	: 532 nm, <5mW
Working Range*	: 50 m
Working Range With Receiver*	: 300 m (diameter)
Leveling Accuracy*	: ± 0.1 mm / m
Batteries	: 2 x 1.5 V LR20(D)
Receiver	: LR 1G
Weight	: 1.8 kg





* The working range can be decreased by unfavorable environment conditions (eg. Direct sun irradiation).

Laser Rangefinder, GLM 150 C
 Inspection Camera, Detector, GTC 400 C
 Thermo Detector, Laser, GLL 3-80 CG
 Electronic Line Laser, Conbl Laser,
 Rotation Laser, Tile Laser, Optical Level
 Angle Measurer, Digital Inclinator
 Laser Receiver, Tripod,
 Optical Level Measuring Rod
 Measuring Rail, Universal Holder
 Bracket, Accessories

Tile Laser

GTL 3
(0 601 015 200)



Capacity	
Laser Diode	: 635 nm, <1mW
Laser Class	: 2
Accuracy	: ± 0.2 mm / m
Accuracy between 45° and 90° - Line	: ± 0.4 mm / m
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 0.5 kg

Optical Level

GOL 26 D
(0 601 068 000)



Capacity	
Magnification	: 26x
Levelling Accuracy	: 1.6 mm / 30 m
Working Range	: 100 m
Dust and Splash Protection	: IP 54
Weight	: 1.7 kg

GOL 32 D
(0 601 068 500)



Capacity	
Magnification	: 32x
Levelling Accuracy	: 1 mm / 30 m
Working Range	: 120 m
Dust and Splash Protection	: IP 54
Weight	: 1.7 kg



Angle Measurer

GAM 220
(0 601 076 500)



Capacity	
Measurement Range	: 0 - 220°
Accuracy, Angles	: ± 0.1°
Leg Length	: 40 cm
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 1.3 kg

Digital Inclinator

GIM 60 L
(0 601 076 900)



Capacity	
Measurement Range	: 0 - 360°(4 x 90°)
Laser working range	: 30 m
Electronics Measurement	
Accuracy 0° / 90°	: ± 0.05°
Electronics Measurement	
Accuracy at 1° - 89°	: ± 0.2°
Batteries (Grade measurement):	1 x 9V 6LR61 (Laser Operation) 2 x AAA LR03
Weight	: 0.9 kg

GIM 120
(0 601 076 800)



Capacity	
Measurement Range	: 0 - 360° (4 x 90°)
Electronics Measurement	
Accuracy 0° / 90°	: ± 0.05°
Electronics Measurement	
Accuracy at 1° - 89°	: ± 0.2°
Length	: 1250 mm
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 1.4 kg



Laser Receiver

LR 1G (for GRL 300 HVG)
(0 601 069 700)



Capacity	
Working Range	: 0 - 150 m
Measurement Accuracy (fine/rough)	: ± 1 mm / ± 3 mm
Dust and Splash Protection	: IP 65
Batteries	: 1 x 9 V 6LR61
Weight	: 250 g

LR 5 (for GLL 5-40 E / GLL 8-40 E)
(0 601 069 G80)



Capacity	
Working Range	: 5 - 40 m
Batteries	: 1 x 9 V 6LR61
Dust & Splash Protection	: IP 54

LR 6 (for GLL 5-50 X / GLL 3-80)
(0 601 069 H00)



Capacity	
Working Range	: 5 - 50 m
Dust & Splash Protection	: IP 54
Measurement Accuracy (fine/Rough)	: ± 1 mm / ± 3 mm
Batteries	: 2 x 1.5 V LR03 (AAA)
Weight	: 0.2 kg



Optical Level

LR 7 (for GCL 2-50 CG / GLL 3-80 CG)
(0 601 069 J00)



Capacity	
Working Range	: 5 - 50 m
Dust & Splash Protection	: IP 54
Measurement Accuracy (fine/Rough)	: ± 1 mm / ± 3 mm
Batteries	: 2 x 1.5 V LR6 (AA)
Weight	: 0.15 kg

Tripod

BT 150 (1/4")
(0 601 096 B00)



Capacity	
Work Height	: 55 - 157 cm
Tripod Thread	: 1/4"
Weight	: 1.3 kg

BT 150 (5/8")
(0 601 096 C80)



Capacity	
Work Height	: 52 - 154 cm
Tripod Thread	: 5/8"
Weight	: 1.1 kg



* The working range can be decreased by unfavorable environment conditions (eg. Direct sun irradiation).

Tripod

BT 160
(0 601 091 200)



Capacity	
Work Height	: 97 - 160 cm
Tripod Thread	: 5/8"
Weight	: 4.1 kg

BT 170 HD
(0 601 091 300)



Capacity	
Work Height	: 107 - 165 cm
Tripod Thread	: 5/8" x 11
Weight	: 5.5 kg

Optical Level Measuring Rod

GR 240
(0 601 094 100)



Capacity	
Length	: 2.4 m
Unit Of Measure	: m / cm
Weight	: 1.3 kg




GR 500
(0 601 094 300)



Capacity	
Length	: 5.0 m
Unit Of Measure	: m / cm
Weight	: 1.98 kg

BT 350 (c/w bracket & holder)
(0 601 015 B00)



Capacity	
Max Height	: 140 - 350 cm
Weight	: 2.5 kg

Accessories

RM 3 + RC 2 (for GCL 2-50 CG)
(0 601 092 800)



Capacity	
Height	: 120 mm
Length	: 135 mm
Weight	: 0.500 kg



Universal Holder

BM 1
(0 601 015 A01)



Capacity	
Mount Thread	: 1/4"
Weight	: 0.5 kg

Bracket

Bracket (for LR 1, LR 1 G, LR 5)
(1 608 M00 70F)



Bracket (for LR 6)
(1 608 M00 C1L)





BOSCH

Home & Cleaning Range



EASY

UNIVERSAL

ADVANCED (Induction motor)



Easy
Aquatak 100
(0 600 8A7 EL0)

Universal
Aquatak 125
(0 600 8A7 AL0)

Universal
Aquatak 130
(0 600 8A7 BL0)

Advanced
Aquatak 140
(0 600 8A7 DL0)

Advanced
Aquatak 150
(0 600 8A7 7L0)

Pressure (bar)

100

110

125

130

140

150

Flow Rate (l/h)

300

330

360

380

450

500

Motor Power (W)

1,200

1,300

1,500

1,700

2,100

2,200

Max. Pressure (bar)

100

110

125

130

140

150

Max. Temp (°C)

40

40

40

40

40

40

Voltage (V)

220 / 240

220 / 240

220 / 240

220 / 240

220 / 240

220 / 240

Frequency (Hz)

50 / 60

50 / 60

50 / 60

50 / 60

50 / 60

50 / 60

Weight (kg)

3.0

3.8

6.8

7.8

17.6

22.5

Hose (m)

3

3

5

6

8

8

Self-priming Capable

Yes

Yes

Yes

Yes

Yes

Yes

Accessories Inside Package

- Bosch 360 Gun
- High Pressure Detergent Nozzle (350ml)
- 3m Hose

- Rotary nozzle
- Variable nozzle
- High Pressure Detergent Nozzle (450ml)
- Water Filter
- High Pressure Gun
- Lance
- High Pressure Hose 3m

- Trio nozzle
- Clear New Water Filter
- High Pressure Detergent Nozzle (450ml)
- Bosch Gun
- Standard Lance
- High Pressure Hose 5m

- Trio nozzle
- Rotary nozzle
- Water Filter
- High Pressure Detergent Nozzle (450ml)
- Bosch Gun
- Standard Lance
- High Pressure Hose 6m Length

- High Pressure Detergent Nozzle (550ml)
- Water Filter
- Bosch Gun
- Rotatory Nozzle
- Standard Lance
- 8m PU High Pressure Hose

- High Pressure Detergent Nozzle (550ml)
- 60 ° Fixed Fan Jet nozzle
- Variable Fan Jet Lance
- Standard Lance
- Hose 8m (Steel armed)
- Cable 5m
- Bosch Gun
- High Pressure Hose Reel
- Roto Lance



High Pressure Cleaner Accessories

Rotary Nozzle
(F 016 800 580)



- Aquatak 110, 120, 125, 130 and AQT 42-13



90° Nozzle
(F 016 800 581)



- Aquatak 110, 120, 125, 130, AQT 42-13 and 45-14 X



Trio Nozzle
(F 016 800 508)



- Aquatak 110, 120, 125, 130 and AQT 42-13



Vario Fan Jet Nozzle
(F 016 800 582)



- Aquatak 110, 120, 125, 130 and AQT 42-13



450 Detergent Nozzle
(F 016 800 509)



- All AQT range



Bosch 360 Gun
(F 016 800 536)



- Aquatak 100, 110, 120, 125, 130



AquaSurf 250 Patio Cleaner
(F 016 800 486)



- Aquatak 110, 120, 125, 130



Suction Nozzle
(F 016 800 356)



- Aquatak 110, 120, 125, 130, AQT 42-13 45-14 X and 150



Wash Brush
(F 016 800 359)



- Aquatak 110, 120, 125, 130, AQT 42-13 45-14 X and 150



Water Filter
(F 016 800 577)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



Self-priming Kit (with Filter)
(F 016 800 421)



- All AQT range



Drain Pipe Cleaner 10 m
(F 016 800 362)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



High Pressure Hose 6 m
(F 016 800 360)




- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



Extension Hose 6 m
(F 016 800 361)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13

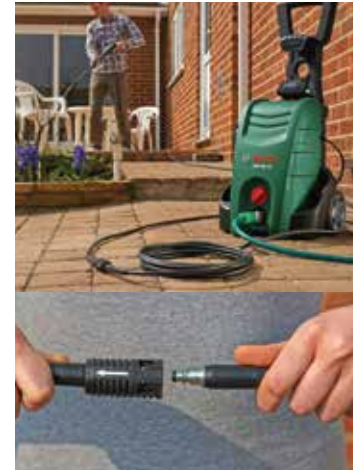

Car Cleaning Kit
(F 016 800 572)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



Adaptor for Karcher Accessories
(F 016 800 575)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13





Warranty

This serves to inform you that all **Bosch** Power Tools are guaranteed against manufacturing defects for a period **6 months** from the registered date of purchase (**Bosch Measuring Tools, GHP Range High Pressure Washer and HEAVY DUTY Range Power Tools are entitled to 1 Year Warranty, Only Bosch Hot Air Guns, Bosch Batteries and Bosch Charges are entitled to 6 months warranty. 1 Year Warranty only applicable for purchases made from 1st June 2016 onwards. Term and Conditions apply**). For the same defect repair within warranty period, a maximum **3 times** warranty repair are allowed for **Bosch** Power Tools, **2 times** for **Bosch** Measuring Tools and **Bosch** Home & Garden Tools. This guarantee, however, does not cover damage caused by accident, misuse, unauthorized repairs, tampering, normal wear & tear, additions and modifications made to the tool in any manner. In case of complaint, please send the tool, undismantled together with official proof of purchase, i.e. **tax invoice or receipt stated with tool's serial no.**, to **Bosch Power Tools Authorised Service Centre**.

Jaminan

Dimaklumkan bahawa tempoh jaminan untuk Alat-alat kuasa **Bosch** akibat kecacatan product semasa pengilangan adalah terhad kepada **6 bulan sahaja** bermula tarikh pembelian (**Alat Pengukur Bosch, Siri Pencuci Tekanan Tinggi GHP Bosch dan Siri HEAVY DUTY Alat-alat Kuasa Bosch Produk tempoh jaminannya 1 Tahun Hanya Alat Pengering Bosch, Bateri Bosch dan Pengecas Bateri Bosch Tempoh Jaminannya 6 bulan. Tempoh Jaminan 1 Tahun hanya untuk pembelian bermula dari 1hb Jun 2019. Tertakluk kepada Terma and Syarat**). Jumlah maksimum pembaikan dalam tempoh jaminan adalah terhad kepada **3 kali** sahaja untuk Alat-alat kuasa **Bosch**, **2 kali** sahaja untuk Alat-alat Pengukur **Bosch** dan Alat-alat Kuasa Halaman **Bosch**.

Tempoh jaminan ini tertakluk kepada kerosakan akibat kemalangan, penyalahgunaan, membaikpulih yang tidak diakui, haus yang sepatut ada dan pengubahsuaian yang mengakibatkan kerosakan Alat-alat kuasa tersebut.

Bagi sebarang pengaduan, sila hantar Alat-alat Kuasa dan **tax inouis rasmi** atay resit rasmi sebagai bukti pembelian yang dilengkapi dengan nombor siri Alat-alat Kuasa ke **Pusat Servis Alat-alat Kuasa Bosch Yang Sah**.


保证

谨此通知阁下有关所有**博世**电工工具享有为期六个月之生产损坏保证，有效期从购买登记日算起（**博世测量仪器，博世GHP 高压清洗机系列及博世 HEAVY DUTY系列产品享有1年保证，除了博世热风机，博世电池和博世充电器享有6个月保证。1年保证有效期从1-6-2016选购开始。附带条规**）。在维修保证期间，**博世**电动工具享有高达三次维修，**博世**测量仪器及**博世**家园电动工具享有**两次**维修。无论如何，上述保证并不包括有关电动工具因意外、错误使用、非授权维修、正常的磨损、附加及修换或其他方式所造成的损坏及故障。若有任何投诉，请将阁下完整的电功工具和**购买税务发票**或付款收据及具备电功工具编号交到您的**博世电动工具授权维修中心**。

Key To Symbols


	Electronic Control		Rotation Stop		Constant Electronic		Forward / Reverse Rotation		Overload Clutch		Slim Grip		INOX Inox For a perfect finish on stainless steel
	Spindle Lock		Saw Blade Pendulum Action		Dust Extraction		Bosch SDS System		SDS-Plus Tool Holder		Fine Depth Adjustment		Distortion-resistant protective guard
	SDS-Max Tool Holder		SDS-Plus Quick Exchange System		SDS-Clic Quick Clamping System		Velcro Fastening		Easy Fit		Kick Back Stop		Turbo Blower
	Removable Cable		Torque Control		Restart Protection		Direct Cooling and Additional Air Inlets		Brushless EC Motor		Restart Protection		Intelligent Brake System
	Drop Control		Vibration Control		Auto-Lock		Woodrazor		Turbo Power		Laser Class 2		Laser Class 3R
													XLOCK

While all care has been taken to ensure that the information contained in this publication is correct, no responsibility can be accepted for any inaccuracy. The Company reserves the right to alter or modify the information contained herein at any time in light of technical or other developments. Technical specification are valid under normal operating condition only. The company does not accept any responsibility for any misuse of the product and cannot be held liable for consequential damage.

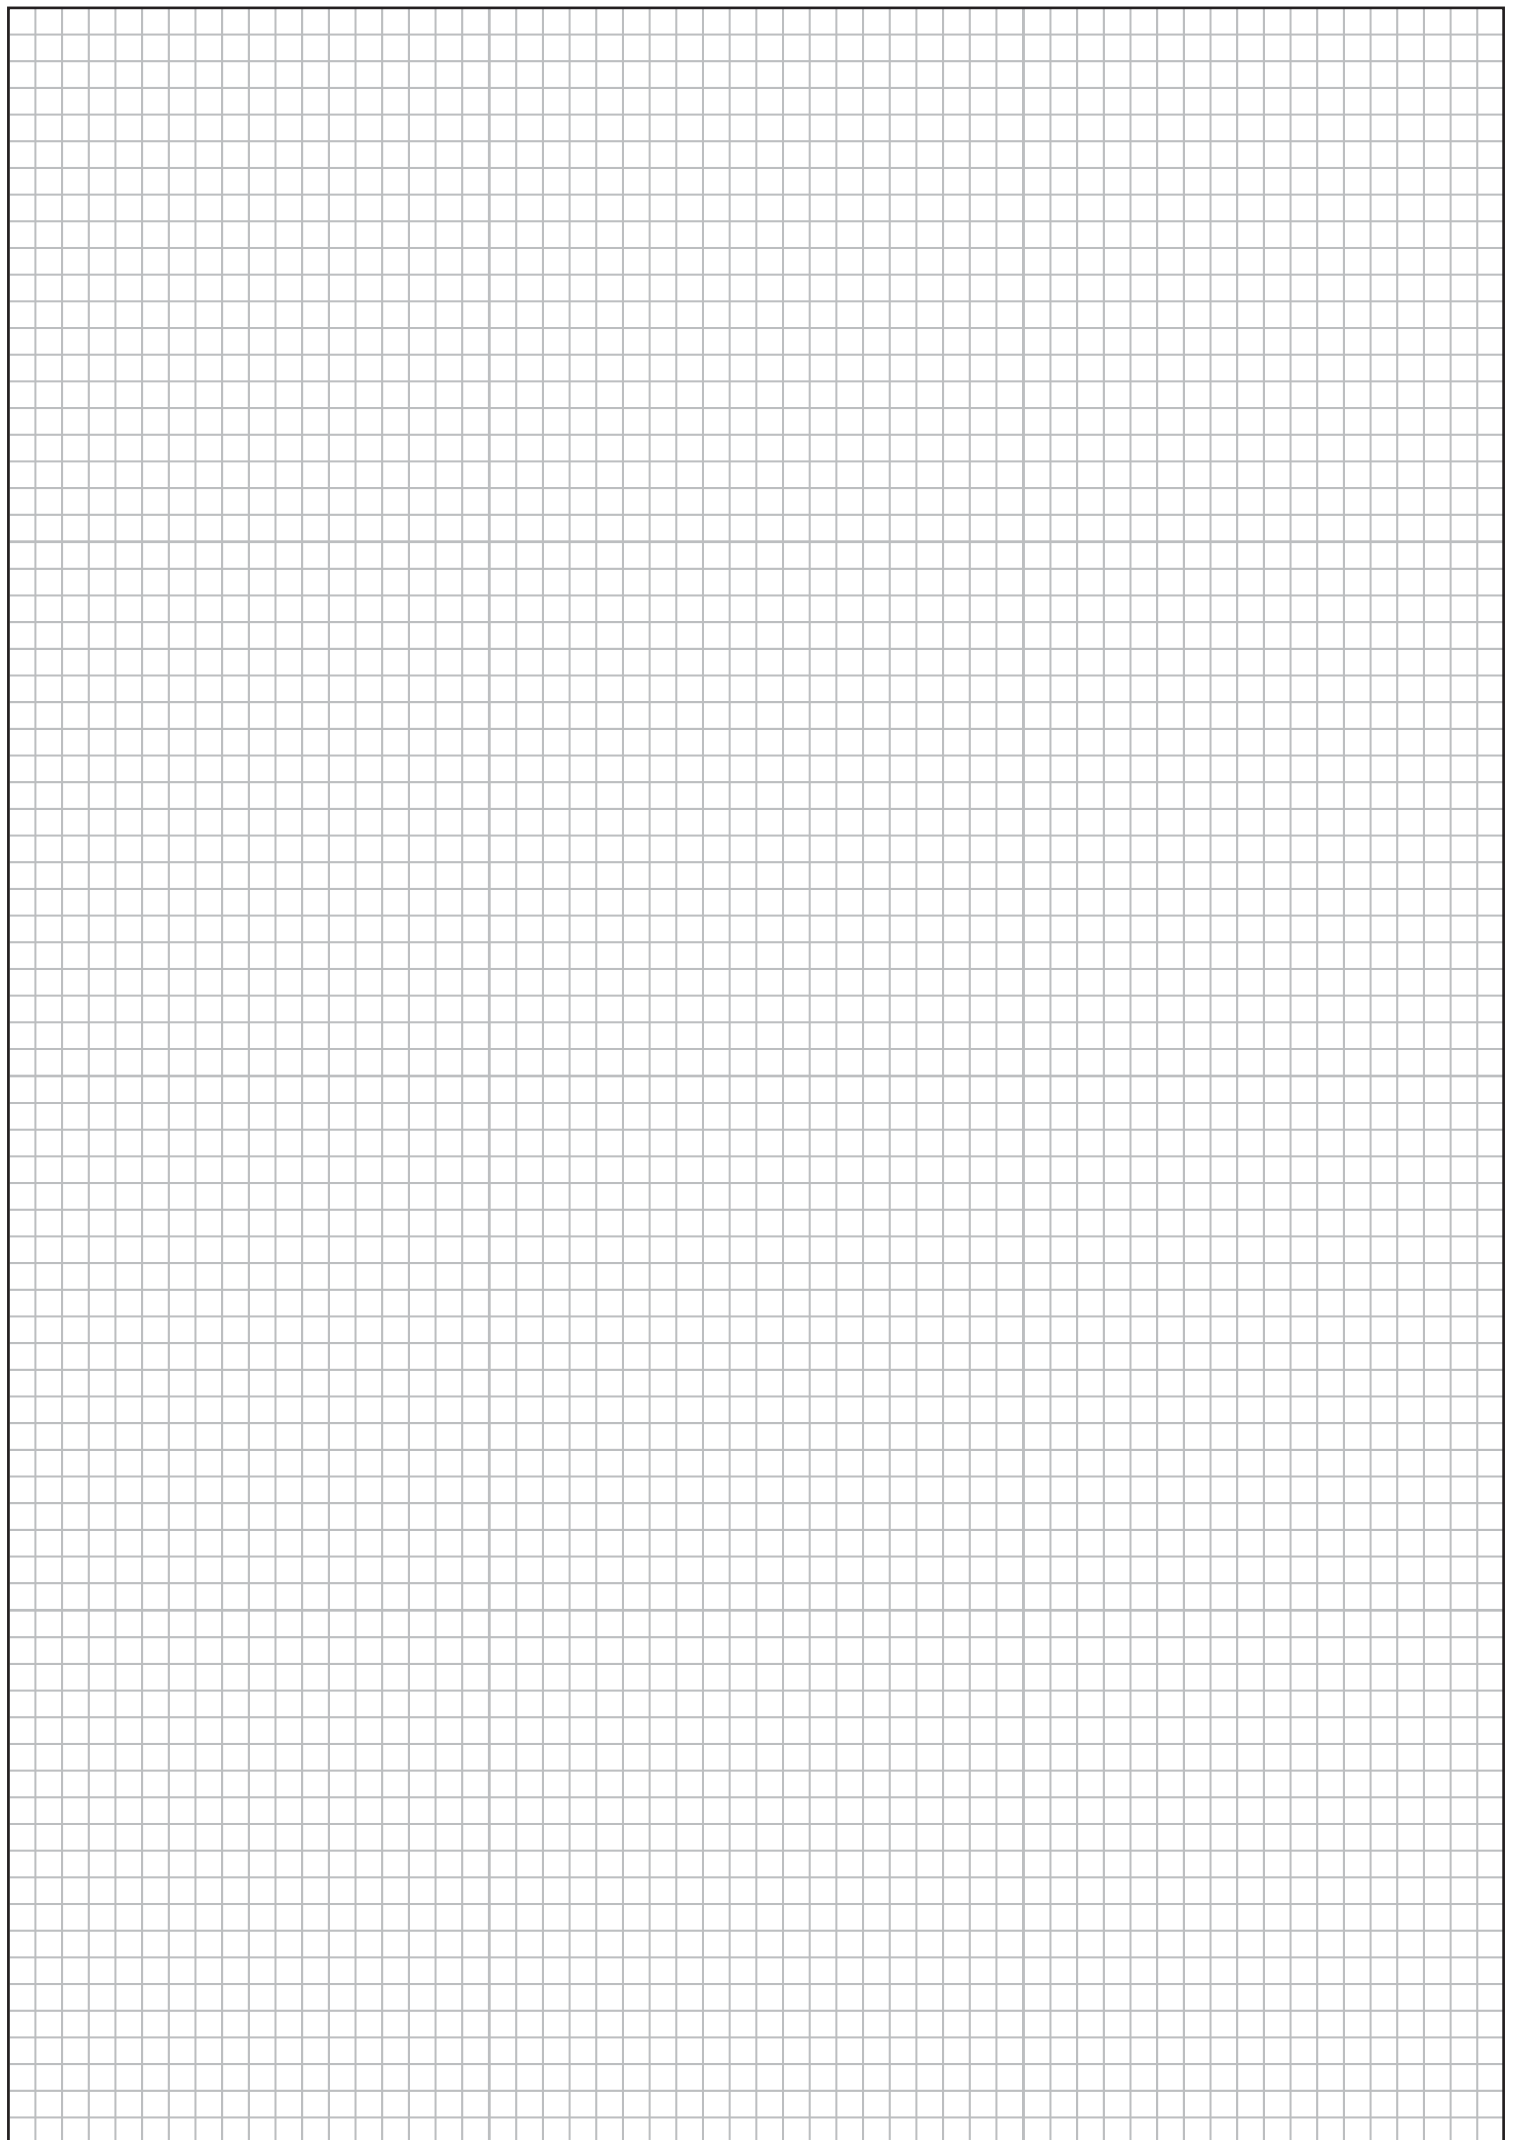



Authorised Service Centres

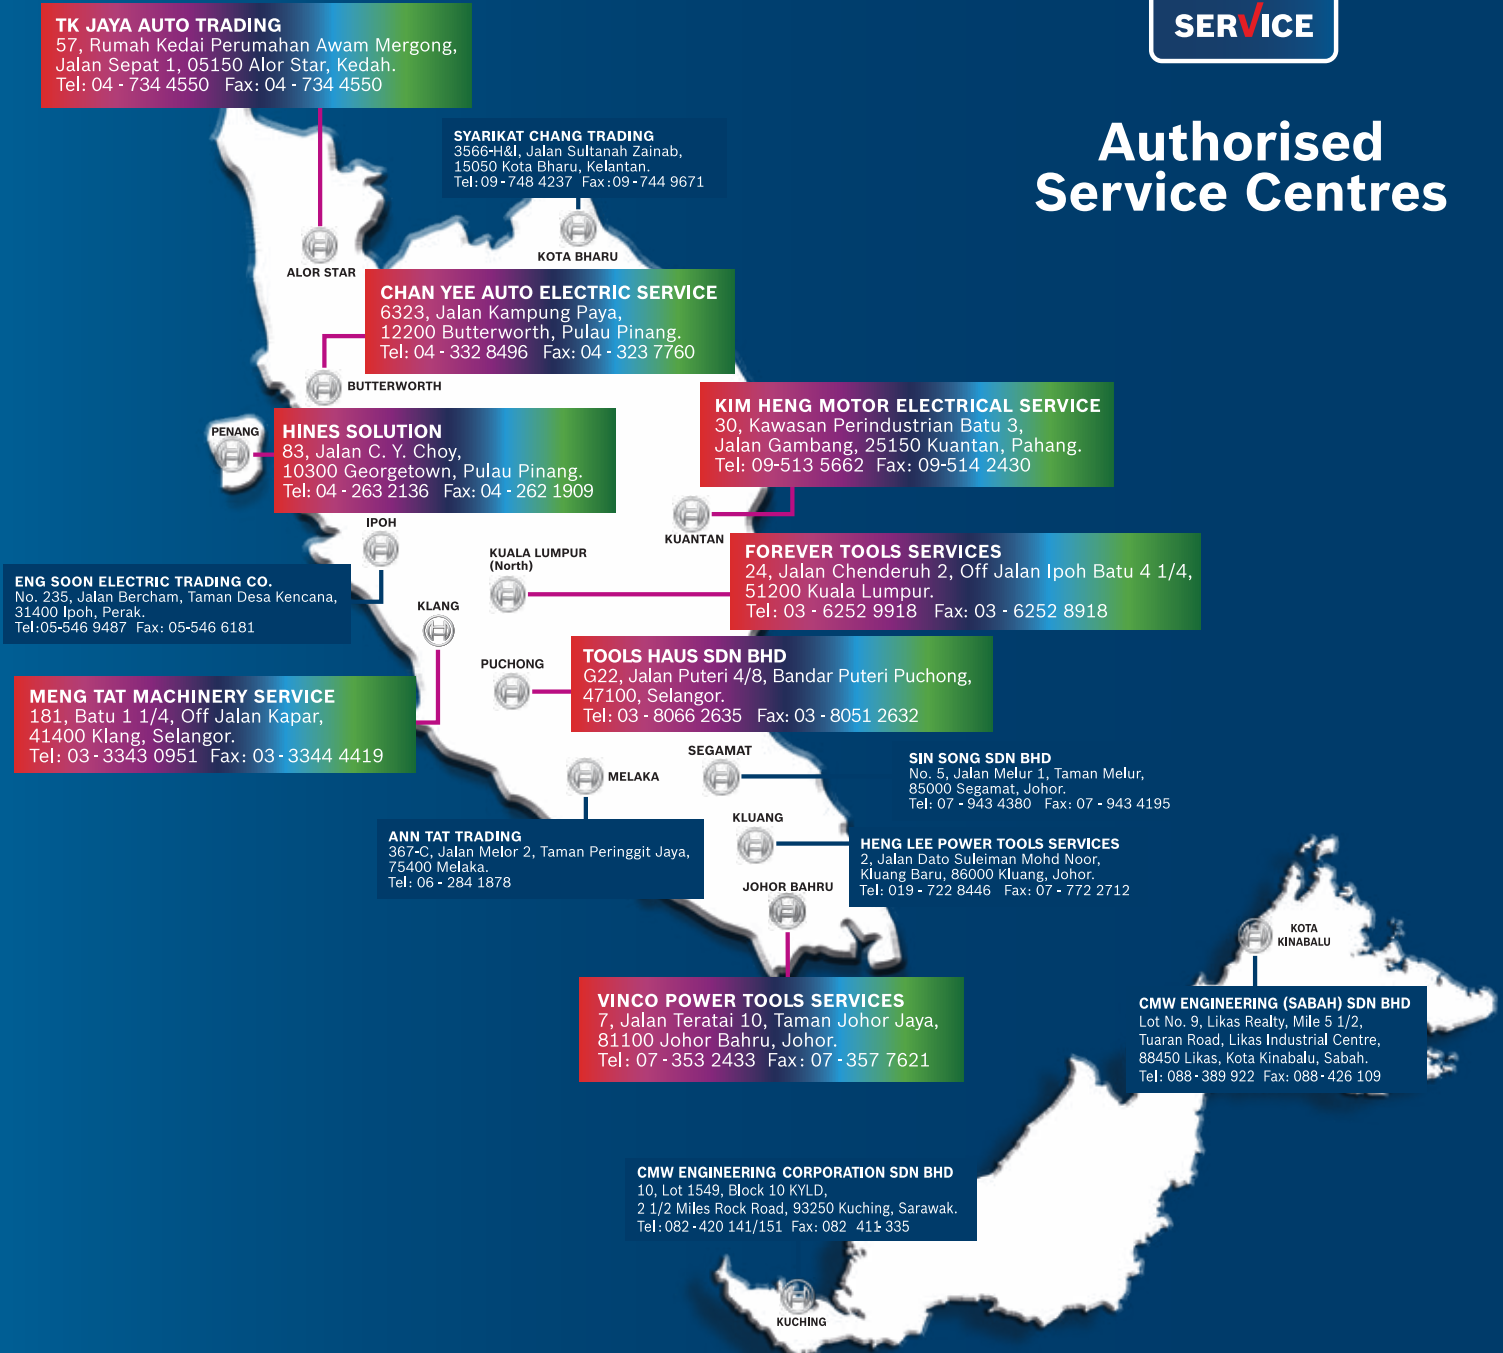

Visit the selected Authorised Service Centres when your tools breakdown.

 Bosch Service Concept Stores

Robert Bosch Sdn Bhd (220975-V)
No. 8A, Jalan 13/6, 46200 Petaling Jaya, Selangor Darul Ehsan, Malaysia.
Tel: +603 - 7966 3000 Fax: +603 - 7958 3838
www.bosch-pt.com.my



Bosch Professional Power Tools and Accessories

For further enquiries, please contact



1 800 880 188

Mon - Fri 9am - 6pm