







REVOLUTIONARY PERFORMANCE. FEEL THE EXTREME.



BITURBO TOOLS SET NEW STANDARDS IN PERFORMANCE WITH LESS WEIGHT AND MAXIMUM OOMPH.

Maximum Power | Maximum output in combination with ProCORE18V batteries. Up to 1,800 watts of corded power.

Perfect handling | BITURBO tools are lightweight, compact and impress with perfect ergonomics. With just one ProCORE18V battery, they perform as well as competitor Tools with two batteries.

Ultimate control | Multiple clever technologies make your work safer, faster and more efficient.

Fully compatible | Compatible with all new and existing Batteries and chargers from the Professional 18V System. For maximum power, use ProCORE18V 8.0 or 12.0 Ah batteries.

New highperformance motor



Our most powerful battery ever

BITURBO Brushless: Up to 1,800 watts of corded power.





BITURBO IS ENGINEERED FOR HIGHEST PERFORMANCE AMONGST 18V SYSTEM

The Professional 18V System combines highest performance with compact dimensions and minimum weight to make your toughest jobs easier. Benefit from the ultimate in performance, uncompromising compatibility and maximum freedom on your job site.

+87%¹ MORE POWER

ProCORE18V: latest cell technology and intelligent battery management.



Up to +135%² **LONGER LIFETIME**

COOLPACK 2.0 technology: prevents the battery from overheating.

Up to +151%3 **EXTENDED RUNTIME**

Excellent battery performance: When other batteries switch off, you just keep working.

PERFECTLY ENGINEERED FOR HIGHEST PERFORMANCE.

9 min to 50%⁴ FASTEST CHARGING

Get back to work faster than ever thanks to the world charging champion GAL 18V-160 C Professional.









BITURBO TOOLS NOW EVEN BETTER THAN CORDED













EXPERIENCE A NEW WAY OF WORKING WITH BITURBO TOOLS AND APP

Connect BITURBO Tools with App for Maximum Efficiency & Customization



World's First Levelling Function



Personalized Speed Levels



GCM 18V-305 GDC















Personalized Setting

t Off Machine, Mitre Saw, Table Saw

Rotary Hammer, Demolition Hammer

18 V BITURBO BRUSHLESS GDS 18V-1050 H (3/4") SOLO DUTY



Capacity Battery Voltage : 18 V No-Load Speed : 0 - 1750 rpm Max.Torque (1st/2nd/3rd level) : 350/750/1050 Nm Max.Breakaway Torque : 1700 Nm

: 0 - 2,600 bpm

GSR 18V-150C HMI SOLO Cordless Drill/Driver (0 601 9J5 0L0) DUTY Capacity

140 pts Battery Voltage : 18 V Torque (soft/hard/max.): 84/100/150Nm No-load speed(1st gear) : 0 - 550 rpm : 0 - 2,200 rpm (2nd gear) Weight excl. battery : 2.1 kg Chuck capacity min/max : 1.5 / 13 mm Torque settings : 25 + 1

GSB 18V-150C HMI SOLO Cordless Combi (0 601 9J5 1L0) DUTY (■) **150 pts Capacity

Battery Voltage : 18 V Torque (soft/hard/max.) : 84/100/150Nm No-load speed(1st gear) : 0 - 550 rpm : 0 - 2,200 rpm (2nd gear) : 2.2 kg Weight excl. battery Chuck capacity min/max: 1.5 / 13 mm Torque settings : 25 + 2

GBH 18V-34 CF SOLO **Cordless Rotary Hammer** (0 611 914 082)



Capacity Battery Voltage : 18 V Equivalent to corded power : 950 W Max. impact energy No-load speed : 500 min₋₁ Impact rate 2,900 bpm Weight with battery : 5.9 kg

GBH 18V-36 C SOLO Cordless Rotary Hammer (0 611 915 082)

Impact Rate



Battery Voltage : 18 V Equivalent to corded power : 1,000 W Max. impact energy · 7 0 .I No-load speed . 500 min₁ Impact rate : 2,900 bpm Weight with battery : 6.1 kg

GBH 18V-45 C SOLO Cordless Rotary Hammer (0 611 913 180)



Battery Voltage 18 W Single impact energy : 12.5 J Impact rate drilling 2,720 bpm : 2,760 pm Impact rate chiselling Drilling diameter : 12-45 mm Rated Toll Speed : 0 - 305 rpm Weight with battery : 9.3 kg

GKS 18V-68 GC with SOLO Cordless Circular Saw (0 601 6B5 180)



Capa Battery Voltage 18 V Battery : ProCORE18V 8.0* : 190 : 30** SB Diameter / Bore Size Cutting Capacity 0°: 68 (50 / 45) Bevel Capacity : 0...500 :~2,500...5,000 RPM



Capacity Voltage 18 V Saw blade diameter : 216 mm Bore hole diameter : 30 mm : 2.0 / 1.4 mm Base blade thickness : 4,500 rpm No-load Speed Weight with battery : 21.6 kg Cutting height : 70 mm Cutting capacity : 635mm

GCM 18V-216 SOLO Cordless Mitre Saw (0 601 B41 0K0)



: 4.600 rpm No-load speed Cutting dept 0°/45° : 70 / 45 mm Cross cut capacity 0°/45°: 270 /190 mm Sawblade diameter : 216 mm Weight w/o battery : 14.7 kg



Capacity Battery Voltage : 18 V Max. Cutting Dept : 120 mm Width : 400 mm Equivalent to 2,000 W Disc diameter 305mm No-load speed : 2,550 - 4,000 rpm Weight incl. battery : 27.8 kg

GWS 18V-15 SC SOLO Cordless Angle Grinder (0 601 9H6 1B2)



Capacity Battery Voltage : 18 V Equivalent to cored power: 1,500 W Disc diameter : 100 mm : 11,000 rpm No-load speed : 2.1 kg Weight w/o battery

GWS 18V-15 SC SOLO Cordless Angle Grinder (0 601 9H6 100)



Capacity Battery Voltage : 18 V Equivalent to cored power : 1,500 W Disc diameter 125 mm : 3,400 - 11,000 (125mm) No-load speed : 2,600 - 8,500 (150mm Weight w/o battery : 2.1 kg

GWS 18V-15 SC SOLO Cordless Angle Grinder (0 601 9H6 300)



Capacity 18 V Battery Voltage Equivalent to cored power: 1,500 W Disc diameter : 150 mm : 3,400 - 11,000 rpm No-load speed Weight w/o battery : 2.3 kg

GCY 42 Professional (1 600 A01 L2W)



30 m Output power : <1 mW





12V Cordless

Rotary Hammer, Demolition Hammer





LOCK	***70 pts
Capacity	
Battery Voltage	: 18 V / 2.0 Ah
Chuck Capacity	: 13 mm
Clutch Setting	: 20 + 1
No-load Speed (1st gear)	: 0 - 450 rpm
(2nd gear)	: 0 - 1,700 rpm
Torque Settings	: 20+1
Max Screw Dia.	: 10 mm
Max Drilling Wood / Steel	: 35 / 10 mm

: 1.0 kg

: GAL 18V-20 CV



V LOCK □	***80 pts
Capacity	
Battery Voltage	: 18 V / 2.0 Ah
Chuck Capacity	: 13 mm
Torque (Hard / Soft)	: 54 / 21 Nm
No-load Speed (1st gear)	: 0 - 450 rpm
(2nd gear)	: 0 - 1,700 rpm
Impact Rate	: 0 - 27,000 min
Max Screw Dia.	: 10 mm
Max Drilling Wood / Steel	: 35 / 10 mm
Masonry	: 8 mm
Charger	: GAL 18V-20 CV



BRUSHLESS		***180 pts
Capacity		
Battery Voltage		: 18 V / 4.0 Ah
Impact Force		: 2.0 J
Drilling Capacity		: 20mm
No-load Speed		: 0 - 1,800 rpm
Impact rate		: 0 - 5,100 bpm
Charger		: GAL 18 V-40 CV
Charging Time		: 60 mins
Weight (bare tool))	: 2.3 kg





: 1/4" Hex; 1/2" Square

:Yes - above trigger

Bit Holder/Shank

LED light

GDS 250-LI Cordless Impact Wrench (0 601 9G6 1L0)

Weight

Charger



Capacity	
Battery Voltage	: 18 V / 4.0 Ah
Charger	: GAL 18 V-40 CV
Max Torque	: 250 Nm
No-load Speed	: 0 - 2,400 rpm
Impact Rate	: 0 - 3,300 bpm
Tool Holder	: 1/2" Square (Pin Hole + Retention Ring)
Screw Size	: M10 - M18



	***20 pts
Capacity	
Vo l tage	: 18 V
Brightness in Lumen	: 300 Lm
No. of LED	: 6 Qnt
Runtime	: 300 min / Ah
Dimensions	: 116 x 78 x 163 mm
Weight	: 0.30 kg



NEW!

GWS 180-LI Professional (0 601 9H9 0L1)

Affordable cordless with corded power

VHY THIS



Affordable price with comparable corded power

New high performance motor delivers 700W equivalent corded power at 30% lower cost



Improved hand control Rubber coated slim grip

ensures best ergonomics



Low maintenance cost

Exchangeable carbon brushes & armature open frame motor enables change of parts separately

Same performance as corded

New high performance motor is as powerful as motor on corded grinders (700W)



Prevent accidental injury • Restart protection function



• Exchangeable carbon brushes &

armature extend the lifetime

Serviceable

Improved hand control

• Soft grip with reduced grip size for better ergonomics

Improved tool lifetime

• Enhanced maze structure of air inlet to reduce dust intake

TARGET USERS

•HVAC •Electrical installation •Outdoor facilities





SOFIGRIF	ENGONOMIC	PROTECTION
GWS 180-LI Professional	Unit	Specifications
Voltage	V	18
Spindle		M10
No-load speed	rpm	9,000
Weight	kg	2,3
Disc size	mm	100

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitles to 6 months warranty. Term and Conditions apply. *** Solo • Bare Tools Only, Batteries, Charger and L-BOXX to Order Seperately. *** Points (Pts) applicable for BeConnected promotion. User have to purchase, scan or manual register participating tools and upload invoices before receiving Pts. Promo Period: 2nd Jan • 31st Dec 2021. Term and conditions apply.

18 V Li-Ion Bosch Heavy Duty GSR 18V-50 Cordless Drill / Screwdriver (0 601 9H5 0L0)

Battery Voltage : 18 V / 2.0 Ah Max.Torque(hard/soft) : 50 / 28 Nm Chunk Type : Metal No-load speed : 0-460 / 0-1,800 rpm Drilling Dia.: In Steel In Wood : 35mm Max. Screw · 10mm : GAL 18V-40 CV Charger Charging Time : 40 mins

(0 601 9H5 1L0) HEAVY DUTY 1 year warranty	
RUSHIESS Capacity	***120 pt
Battery Voltage	: 18 V
Max.Torque(hard/soft)	
Chunk Type	: Metal
No-load speed	: 0-460 / 0-1,800 rpi
Drilling Dia.: In Steel	: 13mm
In Wood	: 35mm
In Masoni	ry: 13mm

: 10mm

· 40 mins

GAL 18V-40 CV

GSB 18V-50

Max. Screw

Charging Time

Charger

Cordless Impact Drill

GWS 18V-10 Cordless Angle Grinder (0 601 9J4 0L1) Battery Vo**l**tage No-Load Speed : 9000 rpm

***300 pts 18 V / ProCore 8.0Ah Max Output Power : Equivalent to 1000W corded tool (w/PRoCORE) Grip Circumference: 155mm : 100mm (M10) Weight : 2KG (Tool only) Charger GAL 1880 CV Charging Time : 65 mins

GDX 18V-200 C Cordless Impact Wrench / Driver (0 601 9G4 2L0) ***200 pts Battery Voltage 18 V / 4.0Ah Max. Torque : 200 Nm No load Speed: 1-1,100/2,300/3,400 rpm Impact Rate : 0- 2,300/3,400/4,200 rpm Head Length : 147 mm Weight (w/o battery) : 1.17 kg

Bit Holder/Square Drive : 1/4" Hex

1/2" Square

: 60 mins

: GAL 18V-40CV







Capacity	
Battery Voltage	: 18 V
Luminous Flux	: 420 Lumen
Max. operating time	: 135 mins/Ah
Weight	: 0.3 kg

GLI 18V-1900 (Solo)** **Cordless Torch** (0 601 446 400)





GSA 18V-LI C SOLO Cordless Sabre Saw (0 601 6A5 080)

Charger

Charging Time



	"""ou pus
Capacity	
Battery Voltage	: 18 V / 4.0Ah
Stroke Length	: 21 mm
No load Stroke Rate	: 0- 3,050 spm
Cutting Dept In Wood	: 200 mm
in Metal	: 100 mm

GDS 18V-400 Professional (0 601 9K0 0L0)

Powerful Wrench, where Power & Durability Comes Together







Max torque of 400Nm to tighten and untighten up to M20 bolts and 30mm nuts



Robustness

Improved lifetime for critical internal components



•Auto Repairer

TARGET USERS

ABR makes disassembling easier by ensuring tool is automatically stop when nuts are loosen

Robustness

Aluminum cover for jobs in the most harsh environment


High Torque

Comes with 400 Nm loosening nuts

Increased Robustness

Auto Bolt Release

Improved lifetime of critical component such as the trigger switch



Brushless motor

Maintenance-free and longer lifetime

Enhanced Cooling System

Increased heat dissipation on the PCBA

5.0Ah Battery with CoolPack

***180 pts

More application per single battery charge.

Make sure no disturbance of work with CoolPack technology

·Automobile Installer

Constructor •Scaffold







older	 	K Insta	116
00000	STOP	L	

GDS 18V-400 Professional	Unit	Specifications
Battery Voltage	V	18
Max Declared Torque	Nm	400
No.Load Speed	rpm	0 - 2,500
Impact Rate	bpm	0 - 3,700
Weight (w/ battery)	Kg	1.25
Weight (w GBA 18V 5.0Ah)	Kg	1.85
Head Length	mm	172

2500



NEW!

1 year warranty

GSA 18V-LI C SOLO** (0 601 6A5 080)

Compactness with superior control





Internal counter-balance and anti-vibration system provides stability and controllability



Compact and handy design

Compact, one-handed design makes working in tight or overhead spaces much easier



Fast cutting progress and long runtime

Fastest one-handed sabre saw gets through more than 100 cuts in one charge

TARGET USERS

•HVAC •Electricians •Renovators







Bright LED makes cutline more vivible

Variable speed trigger ensures maximum controllability right from cut initiation



***80 pts

GSA 18V-LI C Professional	Unit	Specifications
Battery Voltage	V	18
Battery Capacity	Ah	2.0 - 6.0
Stroke Rate	spm	3,050
Stroke Length	mm	21
Weight (w/ battery)	kg	2.5

GSA 18V-32 (Solo)** Cordless Sabre Saw (0 601 6A8 108)





***200 nts

	p
Capacity	
Battery Voltage	: 18 V
Stroke Length	: 32 mm
No-load Stroke Rate	: 0 - 2,500 spm
Cutting Depth In Wood	: 230 mm
in Metal	: 175 mm
Weight	: 3.5 kg

GST 18V-LI B (Solo)** Cordless Jigsaw (0 601 5A6 100)



Capacity	
Battery Voltage	: 18 V
No-load Stroke Rate	: 0 - 2,700 spm
Stroke Height	: 23 mm
Cutting Depth In Metal	: 8 mm
In Wood	: 120 mm
In Aluminiu	m : 20 mm
Slanted Cuts	: 0 - 45°
Weight Incl. Battery	: 2.4 kg

GKS 18V-57 (Solo)** **Cordless Circular Saw** (0 601 6A2 2L0)



	200 pts
Capacity	
Battery Voltage	: 18 V
No-load Speed	: 3,400 rpm
Blade Diameter	: 165 mm
Saw Blade Bore Diameter	: 20 mm
Max. Cutting Capacities at	: 90°: 57 mm
at	: 45°: 42 mm
Weight	: 4.1 kg

GGS 18V-LI (Solo)** **Cordless Straight Grinder** (0 601 9B5 300)



***110 pts

Battery Voltage: 18 V No-load Speed: 2 - 22,000 rpm Toolholder: Collet up to 8 mm Diamete Weight: 1.8 kg	Capacity	
Toolholder : Collet up to 8 mm Diameter	Battery Voltage	: 18 V
	No-load Speed	: 2 - 22,000 rpm
Weight : 1.8 kg	Toolholder :	Collet up to 8 mm Diameter
	Weight	: 1.8 kg

GHO 18 V-LI (Solo)** Cordless Planer (0 601 5A0 300)

HEAVY

GAS 18V-1 (Solo)** Cordless Vacuum Cleaner (0 601 9C6 2L0)



Capacity		
Battery Voltage	: 18 V	
Container Vol.	: 700 ml	
Max. Underpressure	: 6 kPa	
Max. Airflow	: 10 I/sec	
Speeds	: 1 Speed	
Runtime	: 7 min / Ah	
Weight (w/o batt, w/o AC)	: 1.3 kg	

GAS 18V-10 L (Solo)** **Cordless Dust Extractor** (0 601 9C6 300)



	***70 pts
Capacity	
Battery Vo l tage	: 18 V
Max. Vacuum	: 90 mbar
Maximum Airflow	: 24 I /sec
Max. Runtime wit	h

Container Volume, Gross/net: 10 / 6 Litre

GBL 18V-120 (Solo)** Cordless Blower (0 601 9F5 1L0)



	***40
ty	
Voltage	: 18 V
J Casad	17 000 ***

	.0 000
Capacity	
Battery Vo l tage	: 18 V
No-load Speed	: 17,000 rpm
Air Speed, Max	: 75 m/s
Air Vo l ume	: 2.0 m³/min
Runtime	: Speed I: 9 min / Ah
	Speed II: 5 min / Ah

	***180 p
Capacity	
Battery Voltage	: 18 V
No-load Speed	: 14.000 rpm
Cutting Depth	: 0 - 1,6 mm
Rebating Depth	: 0 - 8 mm
Planing Width, Max.	: 82 mm
Weight	: 2.6 kg

Weight : 4.6 kg Weight without Cable: 1.1 kg * Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitles to 6 months warranty. Term and Conditions apply. ** Solo · Bare Tools Only, Batteries, Charger and L-BOXX to Order Seperately. *** Points (Pts) applicable for BeConnected promotion. User have to purchase , scan or manual register participating tools and upload invoices before receiving Pts. Promo Period: 2nd Jan · 31st Dec 2021. Term and conditions apply.

GSS 18V-LI (Solo)** **Cordless Orbital Sander** (0 601 9D0 2L0)

	***40 pts
Capacity	
Battery Voltage	: 18 V
No-load Speed	: 11.000 rpm
Orbital Rate	: 22,000min-1
Orbital Diameter	: 1,6 mm
Pad Size	: 113 x 101 mm
Sanding Paper Size	: 114 x 140 mm
Weight	: 1.0 kg

GOP 18V-28 (Solo)* **Cordless Multi-Cutter** (0 601 8B6 002)



MOTOR	***110 pts
Capacity	
Battery Voltage	: 18 V
Oscillation Angle	
Left/Right	: 1,4 ⁰
No-load Speed	: 8,000 - 20,000 rpm
Grip Circumference	: 193 mm
Tool Length	
(without battery)	: 312 mm
Weight	: 2.0 kg

GCB 18V-63 (Solo)** Cordless Metal Band Saw (0 601 2A0 400)



	130 bra
Capacity	
Battery Voltage	: 18 V
Cutting Capacity	: 63.5 x 63.5 mm
Saw Blade	
Dimensions	: 733 x 12.7 x0.35 mm
No-load Speed	: 162 m/min
Weight without Bat	tery: 3.3 kg
Tool dimensions	: 355 x 255 x 200 mm

GBH 18V-26 (Solo)** **Cordless Rotary Hammer** (0 611 909 000)



MOTOR	
Capacity	
Battery Vo l tage	: 18 V
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
Impact Energy	: 2.6 J
Rated Speed	: 0 - 890 rpm
Impact Rate	: 0 - 4,350 bpm
Weight	: 3.5 kg

GDE 18V-16 Cordless Dust Extractor (1 600 A00 51M)

Capacity	
Compatible with	: GBH 18V-26 only
Ori ll ing Diameter	: Max. 16 mm
Max. Dri ll ing	: 100 mm
Neight	: 1.2 kg

36 V Li-Ion Heavy Duty

GBH 36V-EC Compact Cordless Rotary Hammer 2 mode (0 611 903 RL1)



SDS-plus	
Capacity	
In Concrete	: 4 - 18 mm
In Steel	: 13 mm
In Wood	: 30 mm
Impact Energy	: 1.7 J
Rated Speed	: 0 - 1,500 rpm
Impact Rate	: 0 - 4,850 bpm
Battery Voltage	: 36 V / 2.0 Ah
Charger	: AL 3640 CV
Charging Time	: 45 mins
Weight	: 2.9 kg

GBH 36V-LI Plus Cordless Rotary Hammer 3 mode (0 611 906 0L0) / (0 611 906 075)



SD9-phis	
Capacity	
In Concrete	: 8 - 28 mm
In Steel	: 13 mm
In Wood	: 30 mm
Impact energy	: 3.2 J
Impact Rate	: 0 - 4,174 bpm
Battery Voltage	: 36 V / 4.0 Ah / 6.0 Ah
Charger	: AL 3680 CV
Charging Time	: 35 mins
Weight	: 4.5 kg



GHO 12V-20 SOLO** (0 601 5A7 0K0)

1st professional 12V planer for optimized handling experience!





IY THIS



Ergonomics

Easy to handle due to optimized balance point



Compactness

Enabled by a combination of a brushless motor and the 12V System



Cordless freedom

Best operability in every working position thanks to Bosch's first 12V planer

TARGET USERS

•Contractors

•Renovators

•Plumbers and Electriciansd glazing





Excellent Ergonomic Design

Optimized for one hand use with an ergonomic hand position



High quality components Machined planer housing made of one aluminum bloc

Knife holder

Inlay for holding a second planing knife



Switchable dust extraction Adjustment of dust extraction depending on planning direction Suitable for dust bag



12 V Li-Ion Bosch Professional

GSR 120-LI GEN 2 Cordless Drill / Screwdriver (0 601 9G8 0L0)



***50 pts

Capacity	
Battery Voltage	: 12 / 2.0 Ah
Torque (Hard / Soft)	: 30 / 14 Nm
No-load Speed	: 0 - 400 / 0 - 1,500 rpm
Drilling Drilling	
-in Wood	: 20 mm
- in Metal	: 10 mm
Weight	: 0.97 kg

GSB 120-LI GEN 2 Cordless Impact Drill Driver (0 601 9G8 1L0)



***50 pts

Capacity	
Battery Vo l tage	: 12 / 2.0 Ah
Torque (Hard / Soft)	: 30 / 14 Nm
No-load Speed	: 0 - 400 / 0 - 1,500 rpm
Dri ll ing	
-in Wood	: 20 mm
- in Metal	: 10 mm
- in Masonry	: 8 mm
Weight	: 1.06 kg

GDR 120-LI Cordless Impact Driver (0 601 9F0 0L6)



Capacity	
Battery Voltage	: 12 V / 2.0 Ah
Max. Torque Hard	: 100 Nm
No-load Speed	: 0 - 1,300 / 2,600 rpm
Impact Rate	: 2,800 - 3,200 bpm
Max Screw Dia.	: 8 mm
Bit Holder	: 1/4"
Charging Time	: 90 mins
Weight	: 1.05 kg

GSR 12V-30 Cordless Drill / Screwdriver (0 601 9G9 0L1)

12 V Li-Ion Bosch Heavy Duty



Capacity	
Battery Voltage	: 12 V / 2.0 Ah
Dri <mark>ll</mark> ing Dia.: In Ste	el:8mm
In Wo	od :20 mm
Max.Torque(hard/s	soft): 30 / 17 Nm
No-load speed	: 0 - 420 / 1,600 rpn
Charger	: AL 12 V - 40
Charging Time	: 30 mins
Weight	: 0.82 kg

GSB 12V-30 Cordless Impact Drill Driver (0 601 9G9 1L1)



Capacity	
Battery Voltage	: 12 V / 2.0 Ah
Drilling Dia.: In Steel	: 10mm
In Wood	: 20 mm
In Masor	nry: 8mm
Max.Torque(hard/soft	:): 30 / 17 Nm
No-load speed	: 0 - 420 / 1,600 rpr
Charger	: AL 12 V - 40
Charging Time	: 30 mins
Weight	: 0 82 kg

GDR 12V-EC **Cordless Impact Driver** (0 601 9E0 0L2)



100 pts

Battery Voltage	: 12 V / 2.0 Ah
Tool Holder System	: 1/4" Hex (6.35 mm)
No-load Speed	: 0 - 1,200 / 2,600 rpm
Impact Rate	: 0 - 2,700 / 3,100 bpm
Max. Torque	: 110 Nm
Charger	: GAL 1230 CV
Charging Time	: 45 mins
Weight	: 0.95 kg

GSR 12V-15 FC Cordless Screw / Drill Driver (0 601 9F6 0L0)



***110 pts

Capacity	
Battery Voltage	: 12 V / 2.0 Ah
Drilling Dia.: In Steel	: 10 mm
In Wood	l: 19 mm
Max. Torque (hard/soft): 30 / 15 Nm
No-load Speed	: 0 - 400 / 1,300 rpm
Chuck Capacity	: 10 mm
Charging Time	: 45 mins
Charger	: AL 1230 CV
Weight	: 0.6 kg (tool only)

GWS 12-76V-EC (Solo)** **Cordless Angle Grinder** (0 601 9F2 000)



***60 pts No-load Speed 19,500 rpm Grinding Spindle Thread: M5 Bore Size, Diameter : 10 mm Weight : 0.9 kg

GOP 12V-28 (Solo)** Cordless Multi-Cutter (0 601 8B5 0L0)



Capacity Oscilliation Angle on Left / Right : 5,000 - 20,000 rpm No-load Speed Weight : 0.81 kg

GRO 12V-35 (Solo)** **Cordless Rotary Tool** (0 601 9C5 000)



***40 pts

Capacity	
Battery Voltage	: 12 V
Max.Collet Diameter	: 3.2mm
No-load speed	: 5,000 / 32,000 rpm
Weight	: 0.62 kg

GAS 12V-LI (Solo)** Cordless Vacuum Cleaner (0 601 9E3 081)



***30 pts

Capacity	
Battery Voltage	: 12 V
Container Volume	: 0.35 I
Filter Surface	: 408 cm ²
Max. Volume Flow Rate	: 15 I/sec
Max. Volume Pressure	: 45 mbar
Weight	: 0.9 kg

GSA 12V-LI (Solo)** Cordless Sabre Saw (0 601 64L 9L2)



***60 pts

Capacity	
Battery Voltage	: 12 V
Stroke speed	: 0 - 3,000 spm
Stroke Length	: 14.5 mm
Pipe Diameter	: 50 mm
Wood	: 65 mm

GST 12V-LI (Solo)** Cordless Jigsaw (0 601 5A1 0L1)



	***60 pts
Capacity	
Battery Voltage	: 12 V
No-load Stroke Rate	: 1,500 - 2,800 spm
Stroke Length	: 18 mm
Cutting Capacity	
- in Wood	: 70 mm
- in Aluminium	: 3 mm
- in Non-alloy Steel	: 3 mm
Weight	. 1 5 kg

GKF 12V-8 (Solo)** **Cordless Palm Router** (0 601 6B0 0L0) **HEAVY**



Battery Voltage : 12 V Collect Size : 8 (UNI), 6 & 1/4 (RAP) mm No-load rotation: 13,000 min Weight : 1.1 kg

GKS 12V-LI (Solo)** Cordless Circular Saw (0 601 6A1 0L2)



	701
Capacity	
Battery Voltage	: 12 V
No-load Speed	: 1,400 rpm
Depth of Cut - 90°	: 26.5 mm
Bore Diameter	: 15 mm
Max. Bevel	: 45°
Weight	: 1.4 kg

GLI 12V-330 (Solo)** **Cordless Torch** (0 601 4A0 000)





		ou pu
Capacity		
Battery Voltage	: 12 V	
Runtime	: 6 h	
Brightness	: 330 lmn	
Brightness (1m Dis.)	: 350 lux	
Weight	: 0.3 kg	



GBA 12V 2.0 Ah (1 600 A00 F6X)



GBA 18V 2.0 Ah (1 600 A00 1CG)

GBA 18V 4.0 Ah

(1 600 A00 163)



ProCore 18V 4.0 Ah (1 600 A01 93L)



ProCore 18V 8.0 Ah (1 600 A01 93N)



GBA 36V 2.0 Ah (1 600 A00 1ZJ)



GBA 36V 6.0 Ah (1 600 A00 L1M)

GBA 12V 4.0 Ah (1 600 A00 F71)



GBA 12V 6.0 Ah (1 600 A00 X7H)



GBA 18V 6.0 Ah (1 600 A00 8AE)



ProCore 18V 12.0 Ah (1 600 A01 93R)

Charger



(1 600 A01 B8Z)





GAL 1860 CV (for 14.4 V & 18 V Battery) (1 600 A00 16Y)



GAL 1880 CV (for 14.4 V & 18 V Battery) (1 600 A00 B8H)





GAX 18V-30 (for 12 V, 14.4 V & 18 V Battery) (1 600 A01 1AA)

Starter Kit



12V 2.0 Ah (2 Batteries) + GAL 12 V-40 (1 Charger) (1 600 A01 B8Y)



18V 2.0 Ah (2 Batteries) + GAL 18V-40 (1 Charger) (1 600 A01 B91)



18V 4.0 Ah (2 Batteries) + GAL 18V-40CV (1 Charger) (1 600 A01 9S1)

ProCORE 18 V Starter Kit











18V 8.0 Ah (2 batteries) + GAL 18V-160 C (1 charger) (1 600 A01 6GR)







ProCORE starter kit 18V 12.0 Ah (2 batteries) + GAL 18V-160 C (1 charger) (1 600 A01 6GZ)

L-BOXX



-BOXX 102 (1 600 A01 2FZ)



L-BOXX 136 (1 600 A01 2G0)



L-BOXX 238 (1 600 A01 2G2)



L-BOXX 374 (Indent) (1 600 A01 2G3)

L-BOXX Trolley (1 600 A00 1SA)

Trolley / Roller



L-BOXX Roller (1 6000 A00 1S9)





More power

GBA 18V 6.0Ah vs. ProCORE18V 8.0Ah: 860 W vs. 1620 W





Faster charging

Longer lifetime





Vs. no Bosch COOLPACK 2.0 technolog

Charging Time For Battery Capacity (Minute)

36 V Charger	GAL 3680 CV (2 607 225 991)					25	30	35	55				30	35
	GAL 18V-160 C (1 600 A01 9S7)					ı		25	45	20	55	09		
	GAX 18V-30 (1 600 A01 1AA)	30	45	85	130	30	45	85						
	GAL 1880 CV (1 600 A00 B8H)					12	15	35	20	50	65	06		
18 V Charger	GAL 1860 CV (1 600 A00 16Y)					25	35	45	65	75	120			
	GAL 18V-40 (1 600 A01 9RK)					30	40	09	80					
	GAL 18V-20 (1 600 A02 1KV)					20	65	125	180					
	AL 1814 CV (2 607 225 729)					80	105	210			,			
	GAL 12V-40 CV (1 600 A01 B8Z)	25	35	65	95									
12 V Charger	GAL 12V-20	50	65	125	185									
	GAL 1210 CV (1 600 A00 HR3)	95	120	240	360									
	powered by Li-lon technology	1.5 Ah	2.0 Ah (1 600 A00 F6X)	4.0 Ah (1 600 A00 F71)	6.0 Ah (1 600 A00 X7H)	1.5 Ah (1 600 A00 1CC)	2.0 Ah (1 600 A00 1CG)	4.0 Ah (1 600 A00 163)	6.0 Ah (1 600 A00 8AE)	4.0 Ah (1 600 A01 93L)	8.0 Ah (1 600 A01 93N)	12.0 Ah (1 600 A01 93R)	2.0 Ah (1 600 A00 1ZJ)	6.0 Ah (1 600 A00 L1M)
			Λ	77			٨	81		SE SE	18 A °COL	N I	Λ 9	36

Drill

Jigsaw, Circular Saw

GBM 320 (0 601 1A4 5L0)

1 619 PA4 619	***20 pts
Capacity	
Power Input	: 320 W
In Steel	: 6.5 mm
In Aluminium	: 13 mm
In Wood	: 13 mm
No-load Speed	: 4,200 rpm
Weight	: 1.0 kg

GBM 350 (0 601 1A9 5L0)



ELECTRONIC 1 010 1 02 000	20 pts
Capacity	
Power Input	: 350 W
In Steel	: 10 mm
In Wood	: 20 mm
No-load Speed	: 2,800 rpm
Weight	: 1.2 kg

GBM 10 RE (0 601 473 5L0)



2 010 001 200	40 P
Capacity	
Power Input	: 450 W
In Steel	: 10 mm
In Aluminium	: 10 mm
In Wood	: 25 mm
No-load Speed	: 0 - 2,600 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.3 kg

GBM 13 RE (0 601 477 5L0)



	O -
2 610 391 290	***50 pts
Capacity	
Power Input	: 600 W
In Steel	: 13 mm
In Aluminium	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 2,600 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.65 kg





1 607 031 222	•
Capacity	
Power Input	: 550 W
In Steel	: 13 mm
In Aluminium	: 20 mm
In Wood	: 40 mm
No-load Speed	: 0 - 550 rpm
Torque (Approx.)	: 40 Nm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.1 kg

GBM 50-2 (0 601 1B4 0L0)

HEAVY DUTY



720 pt
: 1,200 W
: 50-255 / 100-510 rpm
: Ø50 mm
: Ø23 mm
: M16
: 14,000 N
: 14.7 kg

Impact Drill



2 610 391 290	***40 pts
Capacity	
Power Input	: 500 W
In Masonry	: 10 mm
In Steel	: 8 mm
In Wood	: 20 mm
No-load Spee	d : 0 - 2,600 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.5 kg

GSB 16 RE



2 610 391 290	***60 pt:
Capacity	
Power Input	: 750 W
In Concrete	: 16 mm
In Steel	: 12 mm
In Wood (hard)	: 25 mm
No-load Speed	: 0 - 3,250 rpm
Impact Rate	: 0 - 48,500 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg

GSB 20-2 RE



Capacity	
Power Input	: 800 W
In Concrete	: 20 mm
In Steel	: 13 mm
In Wood	: 40 mm
No-load Speed	: 0 - 1,000 / 3,000 rpm
Impact Rate	: 0 - 16,000 / 48,000 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	· 2.6 kg

Multi Cutter





Capacity	
Power Input	: 300W
Oscillating amplitude	e: 2.8° (2 x 1.4°)
No-load Speed	: 8,000 - 20,000 opm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.5 kg

Foam Cutter



2 604 320 911	***300 pts
Capacity	
Power Input	: 350 W
Cutting Capacity	: 300 mm
No-load Stroke Rate	: 3,200 spm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	· 1 6 kg

Stirrer / Mixer Drill

GRW 12 E (0 601 1A7 070)



1 007 014 17A	***240 pts
Capacity	
Power Input	: 1,200 W
Connector Type	: M14 Inside Thread
Max. Paddle Ø	: 140 mm
Incl. Paddle Ø	: 140 mm
No-load Speed	: 0 - 1,000 rpm
Nominal speed	: 0 - 620 min ⁻¹
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 5.3 kg

Straight Grinder

GGS 5000 L (0 601 224 1L0)



1 607 031 223	***90 pt
Capacity	
Power Input	: 500 W
Max. Collet Capacity	: 8 mm
No-load Speed	: 33,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.4 kg

GGS 28 LC (0 601 221 070)



	100 pts
Capacity	
Power Input	: 650 W
Max.Collet Diameter	:8 mm
No-load Speed	: 28,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.6 kg

GGS 28 C (0 601 220 070)



***90 pts
: 650 W
:8 mm
: 28,000 rpm
: 230 / 240 V
: 50 / 60 Hz
: 1.4 kg



GWS 060 (0 601 375 6L0)

4" Angle Grinder



ELECTRONIC	1 619 P07 571

9 P07 571	***20 pts

Capacity	
Power Input	: 670 W
No-load Speed	: 12,000 rpm
Spindle Thread	: M10
Disc Diameter	: 100 mm
Weight	: 1.6 kg

GWS 750-100 (0 601 394 0L0)



1 619 P11 715	***30 pts
Capacity	
Power Input	: 750 W
No-load Speed	: 11,000 rpm
Disc Diameter	: 100 mm
Grip Size	: 59 / 54.5 mm
Perimeter	: 187 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg

GWS 7-100 ET (0 601 388 5L0)



Capac

1 619 PO	2 870 *** 40 pts
Capacity	
Power Input	: 720 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Wire Cup Brush Diame	eter: 70 mm
No-load Speed	: 2,800 - 9,300 rpm
Voltage	: 230 / 240 V

: 50 / 60 Hz

: 1.8 kg

GWS 900-100 (0 601 396 OLO)



;	1 619 P11 715	***50 pt
	Capacity	
	Power Input	: 900 W
	Grinding / Cutting	
	Disc Diameter	: 100 mm
	Spindle Thread	: M10
1	No-load Speed	: 11,000 rpm
	Voltage	: 230 / 240 V
	Frequency	: 50 / 60 Hz
	Weight	· 1 8 kg

GWS 900-100 S (0 601 396 1L0)



Capa	city	
e o	1 619 P11 715	***50 p
ECECHRONIC		

Capacity	
Power Input	: 900 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Spindle Thread	: M10
No-load Speed	: 2,800 - 11,000 rpm
/oltage	: 230 / 240 V
requency	: 50 / 60 Hz
Weight	: 1.9 kg

GWS 9-100 P (0 601 396 5L0)



1 619 P11 715	***40 pts	
Capacity		
Power Input	: 900 W	
Disc Diameter	: 100 mm	
Spindle Thread	: M10	
No-load Speed	: 11,000 rpm	
Voltage	: 230 / 240 V	
Frequency	: 50 / 60 Hz	

: 1.9 kg

5" Angle Grinder

GWS 13-125 CI (0 601 79E 002)

Frequency Weight



Capacity	
Power Input	: 1,300 W
No-load Speed	: 11,500 rpm
Spindle Thread	: M14
Disc Diameter	: 125 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.3 kg

GWS 17-125 CI (0 601 79G 002)



Capacity	
Power Input	: 1,700 W
No-load Speed	: 11,500 rpm
Spindle Thread	: M14
Disc Diameter	: 125 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.4 kg

GWS 18-125 L (Indent) (0 601 7A3 0L0)



سو		ou pu
Capacity		
Power Input	: 1,80	00 W
No-load Speed	: 12,0	000 rpm
Spindle Thread	: M14	1
Disc Diameter	: 125	mm
Voltage	: 230	/ 240 V
Frequency	: 50 /	60 Hz
Weight	: 2.5	kg

6" Angle Grinder

GWS 17-150 CI (0 601 79K 002)

Weight



1 607 000 V37	***100 pt
Capacity	
Power Input	: 1,700 W
No-load Speed	: 9.300 rpm
Spindle Thread	: M14
Disc Diameter	: 150 mm

2 001 000 101	100 pt.
Capacity	
Power Input	: 1,700 W
No-load Speed	: 9.300 rpm
Spindle Thread	: M14
Disc Diameter	: 150 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.4 kg

7" Angle Grinder

GWS 2200-180 (0 601 8C0 0L0)



	***80 p
Capacity	
Power Input	: 2,200 W
No-load Speed	: 8,500 rpm
Spindle Thread	: M14
Disc Diameter	: 180 mm
Main Handle	: Barrel
Weight	: 5 kg

Bench Grinder GBG 35-15

(0 601 27A 3L0)

HEAVY

GWS 24-180 JZ (0 601 8C2 3L0) HEAVY DUTY

		***90 pts
Capacity		
Power Input	: 2,400	W
No-load Speed	: 8,500	rpm
Spindle Thread	: M14	
Disc Diameter	: 180 m	nm
Main Handle	: Barre	
Weight	: 5.8 kg	3

9" Angle Grinder

GWS 2200-230 (0 601 8C1 0L0)



**	*9	0	pt	S

	***90 pt
Capacity	
Power Input	: 2,200 W
No-load Speed	: 6,500 rpm
Spindle Thread	: M14
Disc Diameter	: 230 mm
Main Handle	: Barrel
Weight	: 5 kg

GWS 24-230 JZ (0 601 8C3 3L0)

Disc Diameter

Main Hand**l**e

Weight



	***110 pt
Capacity	
Power Input	: 2,400 W
No-load Speed	: 6,500 rpm
Spindle Thread	: M14

: 230 mm

: Barrel



Capacity Power Input : 350 W : 3,000 rpm No-load Speed Disc Diameter : 150 mm : 10 kg Weight

GBG 60-20 (0 601 27A 4L0)



	***70 pts
Capacity	
Power Input	: 600 W
No-load Speed	: 3,600 rpm
Disc Diameter	: 200 mm
Weight	: 15 kg

Rotary Hammer, Demolition Hammer * Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitles to 6 months warranty. Term and Conditions apply. ** Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Seperately. *** Points (Pts) applicable for BeConnected promotion. User have to purchase, scan or manual register participating tools and upload invoices before receiving Pts. Promo Period: 2nd Jan - 31st Dec 2021. Term and conditions apply.

GDC 140 Professional (0 601 3A4 0L0)

Smooth yet powerful, easy on hard surfaces too

36V Heavy Duty

Battery, Charger, L-BOXX, Trolley, Roller

Powerful for fast cutting 1400W power provides fast cutting performance





Extended durability Robust motor, coupled with strong flange and sturdy bearing

strong overload capacity **Extended durability** Combination of robust motor, strong flange and bearing

Compact and handy

light weight

Low vibration and optimized mechanism construction provide ease of control and precision

***30 pts

TARGET USERS

Contractors •Renovators

•Plumbers and Electriciansd glazing





GDC 140 Professional Unit **Specifications** Input Power W 1,400 No-Load Speed 13,200 Max. Cutting Disc Diameter mm Max. CUtting Depth mm

Reciprocating Saw GSA 120





***80	pts
	Pto

	"""ou pu
Capacity	
Input Power	: 1,200 W
Stoke Rate	: 0 - 3,000 /min
Stroke Length	: 29mm
Blade Change	: SDS
Max. Cutting Dept i	n Wood : 220 mm
i	n Meta : 20 mm
Weight	: 3.7 kg

Shear GSC 2.8 (0 601 506 142) **HEAVY**



1 007 031 220	
Capacity	
Power Input	: 500 W
In Steel	: 2.8 mm
In Aluminium	: 3.5 mm
No-load Stroke Rate	: 2,400 stroke/min
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.7 kg

Nibbler

GNA 2.0 (0 601 530 103)

Weight



~				
w	1 year arranty*	170		
		1	meta 0	
	9	419	A STATE OF THE PARTY OF THE PAR	
		60		
	#			
4				

1 607 031 228	
Capacity	
Power Input	: 500 W
Mild Steel	: 2.0 mm
Stainless Steel	: 1.0 mm
No-load Stroke Rate	: 2,400 stroke/min
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.0 kg

Jigsaw GST 700 (0 601 2A7 0L0)



2.9

***40 pts

Capacity		
Power Input	: 500 W	
Stroke Rate	: 1,450 - 3,200 spm	
Cutting Depth in V	Vood: 70 mm	
Stroke Length	: 20 mm	
Weight	: 2.1 kg	

Circular Saw **GST 90 BE**

GKS 600 (0 601 6A9 0L0)



Clean Sarga SELECTION	***90 pts
Capacity	
Rated power input	: 650 W
No-load stroke rate	: 500 - 3,100 spm
Stroke length	: 26 mm
Cutting Capacity	
- Wood	: 90 mm
- In alluminium	: 20 mm
- In steel (unalloyed)	: 10 mm
Weight	: 2.6 kg



ELECTROMIC	***60 pts
Capacity	
Power Input	: 1,200 W
No-load Speed	: 5,000 rpm
Blade Bore Size	: 20 mm
Diameter	: 165 mm
Cutting depth (90°/45°)	: 55 / 37 mm
Weight	: 3.6 kg

GKS 140 (0 601 6B3 0L1)



Capacity	
Input Power	: 1,400 W
No-load Speed	: 6,000 rpm
Blade Bore Size	: 20 mm
Diameter	: 184 mm
Max. Cutting Dept	: 64+/- mm
Bevel Capacity	: 0 - 45 °

GKS 190 (0 601 623 0L9)



619 P06 346	***80 pt:
Capacity	
Power Input	: 1,400 W
Blade Diameter	: 184 mm
Max. Cutting Capacities	
at 90°	: 67 mm
at 45°	: 48 mm
No-load Speed	: 5,500 rpm
Vo l tage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 4.1 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitles to 6 months warranty. Term and Conditions apply. *** Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Seperately. *** Points (Pts) applicable for BeConnected promotion. User have to purchase, scan or manual register participating tools and upload invoices before receiving Pts. Promo Period: 2nd Jan - 31st Dec 2021. Term and conditions apply.

Table Extension

Square Fence

Metal Stand

that ensures stability

Table extension at main tabl

out thanks to sliding whee

height can be conveniently draw

With self-adjustment function an

Comes with robust metal stand

calibration range of up to 2mm ensures convenienc

Cordless

12V

Duty

: 1,700 W

: 255 mm

: 25.4 mm

: 4,800 rpm : 45° L / 52° R

: 89 x 89 mm

: 230 / 240 V

: 50 / 60 Hz

: 13.5 kg

GTS 254 Professional (0 601 B45 0L0)

Perfect combination of Power and Large Cutting Capacity

Steel Flat and Thick Table

Back Feet prevents flip over during operation for higher user protection

with excellent flatness, enabling precise cuts

35mm thickness steel table,

WHY THIS



Made for Hard Application High motor torque and

excellent overload capability, guaranteeing cuts on rough material



Robustness and **Accurate Cuts**

35mm thickness steel table with excellent flatness, ensuring professional look, stability and accurate cuts



Metal Stand

Comes with the tool. Assembled with housing guaranteeing more stability

TARGET USERS

•Wood Worker •Carpenter •General Contractors

•Small Furniture Makers





Back Feet



1800 W max.80mm MITER GAUGE		***140 pts
GTS 254 Professional	Unit	Specifications
Cutting depth 0°/ 45°	mm	80 / 55
Rip cut capacity	mm	545
Power	W	1,800 / 15A
Saw blade diameter	mm	254
Overload / restart protection		Yes
Table Extension Length	-	265
Weight	Kg - with Stand	24.4
Stand Feet	-	Yes
Table Material		Steel With coating
No-Load Speed	-	4,300

GKS 235 Turbo (0 601 5A2 0L0)



GCM 12 GDL

2 610 021 311

Capacity ower Input

Blade Size

Max. Mitre

Frequency

Weight

Arbour Size

No-load Speed

Cutting Capacity Voltage

(0 601 B23 670)



***520 pts

2,000 W

: 3,800 rpm : 52° L / 60° R

230 / 240 V

: 50 / 60 Hz

: 32.1 kg

: 104 x 341 mm

: 305 mm

: 30 mm

1 013 F01 003	110 bt
Capacity	
Power Input	: 2,050 W
Saw Blade Diameter	: 235 mm
Max. Cutting Capacities	
at 90°	: 85 mm
at 45°	: 65 mm
No-load Speed	: 0 - 5,300 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 7.6 kg



_	***70 pts
Capacity	
Power Input	: 2,200 W
No-load Speed	: 3,800 rpm
Disc Diameter	: 355 mm
Cutting Capacity Square Bar Round Bar	: 119 x 119 mm : 129 mm
Soft Start	: No
Weight	: 14 kg

Slide Mitre Saw



Capacity	
Power Input	: 2,400 W
Saw Blade Diameter	: 355 mm
Saw Blade Bore	: 25.4 mm
No-load Speed	: 3,800 rpm
Cutting Capacity	: 100 x 196 mm
	: 119 x 119 mm
L	: 130 x 130 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 18.1 kg

Mitre Saw Stand

T1B (0 601 B12 310)



L year rranty*	
ut	: 1,600 W
	040

1 609 B03 790	A MA
Capacity	
Power Input	: 1,600 W
Blade Size	: 216 mm
Bore Size	: 25.4 mm
No-load Speed	: 5,500 rpm
Max. Miter	: 52° L / 60° R
Cutting Capacity	: 70 x 312 mm
Vo l tage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 17.3 kg



Capacity	
Length of Work Bench	
without Extension	: 1,220 mm
Length of Work Bench	
with extension	: 2,630 mm
Weight	: 15 kg / 19 kg

Table Saw

Mitre Saw

(0 601 B29 0L0)

GCM 10 MX

1 607 014 171 Capacity

Power Input Blade Size

Arbour Size

Max Mitre

Vo|tage

Frequency

Max. Cutting

No-load Speed

HEAVY





2 610 018 332

2 010 010 002		1	
Capacity			
Power Input		:	: 1,800 W
Saw Blade Diamet	er	:	254 mm
Bevel Setting		:	47° L / 2° R
Cutting Capacity	(Right) :	: 460 mm
	(Left)	:	: 210 mm
Voltage			230 / 240 V
Frequency		:	50 / 60 Hz
\Moight			26 kg

^{*} Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitles to 6 months warranty. Term and Conditions apply. ** Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Seperately. *** Points (Pts) applicable for BeConnected promotion. User have to purchase, scan or manual register participating tools and upload invoices before receiving Pts. Promo Period: 2nd Jan - 31st Dec 2021. Term and conditions apply.

Table Saw Stand GTA 600



Capacity	
Table Height	: 602 mm
Max. Length Extension	
Unfolded	: 450 x 520 (D x L)
Max. Load Capacity	: 60 kg
Weight	: 6.3 kg

Eccentric Sander

GEX 125-1 A / GEX 125-1 AE (0 601 387 0L0) / (0 601 387 5L0)





2 609 120 199	***60/70 pt
Capacity	
Power Input	: 250 W
No-load Speed	: 7,500 - 12,000 rpm
Oscillating Circu	uit
Diameter	: 2.5 mm
Orbit Rate	: 15,000 - 24,000 opm

: 125 mm : 230 / 240 V

: 50 / 60 Hz

: 1.3 kg

Planer GHO 6500 (0 601 596 OLO)



[2 609 120 398]	***40 pts
Capacity	
Power Input	: 650 W
No-load Speed	: 16,500 rpm
Adjustable Chip Thickness	: 0 - 2.6 mm
Adjustable Rebating Depth	: 0 - 9 mm
Weight	: 2.8 kg

GHO 10-82 (0 601 594 006)



WOOD RAZOR	2 609 120 064	***
Compain		

2 609 120	0 064 *** 80 pts
Capacity	
Power Input	: 710 W
Planing Width	: 82 mm
Planing Depth	: 0 - 1.0 mm
No-load Speed	: 16,500 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.5 kg

Belt Sander

GBS 75 A (0 601 274 004)



1 007 031 222	***130 p
Capacity	
Power Input	: 710 W
No-load Belt Speed	: 300 m/min
Sanding Surface	: 75 x 130 mm
Belt Size	: 75 x 533 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.2 kg

Polisher

Sanding Plate

Voltage Frequency

Weight

C:

GPO 950 (0 601 3A2 0L0)



	***70 pts
Capacity	
Power Input	: 950 W
Adaptor Size	: M14 / M16
Rubber Sanding Plate,	
Diameter	: 180 mm
Variable Speed	: 600 - 2,100 rpm
Weight	: 5.5 kg

GPO 12 CE



1 607 014 176	***90 pt:
Capacity	
Power Input	: 1,250 W
No-load Speed	: 750 - 3,000 rpm
Polishing Disc Diameter	: 180 mm
Thread of	
Polishing Spindle	: M14
Tool Length	: 450 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.5 kg

Orbital Sander GSS 140 (0 601 2A8 0L0)



***20 pts

Capacity	
Power Input	: 220 W
No-load Speed	: 14,000 rpm
No-load Orbital Stroke Rate	e: 28,000 min-1
Orbital Diameter	: 1.5 mm
Sanding Sheet Dimension	: 114 x 140 mm
Sanding Plate Dimension	: 101 x 112 mm
Weight	: 1.2 kg

GSS 2300 (0 601 298 OLO)



	***30 pts
Capacity	
Power Input	: 190 W
No-load Speed	: 12,000 rpm
Maiabt	1 E l/m

Hot Air Gun

GHG 18-60 (0 601 2A6 1L0)



	TO PLS
Capacity	
Power Input	: 1,800 W
Temperature	: 50 / 400 / 600 °C
Air Flow Rate	: 250 / 350 / 600 I/min
Weight	: 0.52 kg

GHG 20-63 (0 601 2A6 2L0)



SELECTION SPEED DESPLAY	***ou pts
Capacity	
Power Input	: 2,000 W
Temperature	: 50 - 630 °C
Air Flow Rate	: - 150 / 300 / 500 I/min
Weight	: 0.65 kg

Trimming / Router

GKF 550 (0 601 6A0 0L0)



	****40 pt
Capacity	
Power Input	: 550 W
No-load Speed	: 33,000 rpm
Bix Size	: 6 mm / 1/4"
Weight	: 1.4 kg

GOF 130 Professional



SWISS (L/4.) SOLLOW	- ropts
Capacity	
Power	: 1,300 W
No-load speed	: 11,000 - 28,000 rpm
Bit holder	: 6 - 8.0 mm
Plunge depth	: 55 mm
Weight	: 3.5 kg

"Strictly prohibited from being used upside down"

Glue Gun

GKP 200 CE (0 601 950 703)



Capacity	
Gluing Capacity	: 30 g/min
No. of Heating Elements	: 2
Warming Up Time	: 4 min
Glue Stick Length	: 200 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 0.4 kg

Blower

GBL 620 (0 601 980 5L0)



	***30 pts
Capacity	
Power Input	: 620 W
No-load Speed	: 16,000 rpm
Air Flow Rate	: 3.5 m³/min
Weight	· 1 7 kg

GBL 82-270 (0 601 980 4L1)



Capacity	
Power Input	: 800 W
No-load Speed	: 0 - 16,000 rpm
Air Flow Rate	: 0 - 4.5 m³/min
Weight	: 1.8 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitles to 6 months warranty. Term and Conditions apply. ** Solo · Bare Tools Only, Batteries, Charger and L-BOXX to Order Seperately. *** Points (Pts) applicable for BeConnected promotion. User have to purchase, scan or manual register participating tools and upload invoices before receiving Pts. Promo Period: 2nd Jan · 31st Dec 2021. Term and conditions apply.

Wet & Dry Vacuum Cleaner GAS 15



***80 pts

Capacity	
Power Input	: 1,100 W
Container (gross/net)	: 15 / 8 litre
Air F l ow Max.	: 33 I/sec
Max. Vacuum Pressure	: 22 kPa
Weight	: 6 kg



1.250 W Power Input Container (gross/net) : 25/21 litre Air F**l**ow Max. : 33 **l**/sec Max. Vacuum Pressure : 200 mbar Weight : 9.0 kg





2 kg Rotary Hammer

GBH 220 (0 611 2A6 0L0)



Capacity	
Impact Energy	: 2J
Power	: 720 W
No-load Speed	: 0 - 2,000 rpm
Max. drilling & Concrete	: 22 mm
Mode	: 3
Weight	: 2.3 kg

GBH 2-24 DRE (0 611 272 1L0)



Capacity	
Power Input	: 790 W
Impact Energy	: 2.7 J
In Concrete	: 4 - 24 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 920 rpm
Impact Rate	: 0 - 4,100 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.8 kg

GBH 2-26 DRE (0 611 253 76C)



: 800 W
: 2.7 J
: 4 - 26 mm
: 13 mm
: 30 mm
: 0 - 900 rpm
: 0 - 4,000 bpm
: 230 / 240 V
: 50 / 60 Hz
: 2.7 kg

GBH 2-26 DFR (0 611 254 76C)



808-pas 1 017 000 323	***140 pt
Capacity	
Power Input	: 800 W
Impact Energy	: 2.7 J
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.9 kg

GBH 2-28 DFV (0 611 267 2L1)



Capacity	
Power Input	: 820 W
Impact Energy	: 3.2 J
In Concrete	: 4 - 28 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 1,300 rpm
Impact Rate	: 0 - 5,100 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.1 kg

3 kg Rotary Hammer

GBH 3-28 DFR (0 611 24A 0L0)



Capacity	
Power Input	: 800 W
Impact Energy	: 3.1 - 3.5 J
In Concrete	: 28 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.6 kg

4 kg Rotary Hammer

GBH 4-32 DFR (0 611 332 1L0)



Capacity	
Power Input	: 900 W
Impact Energy	: 4.2 J
In Concrete	: 32 mm
In Steel	: 13 mm
In Wood	: 32 mm
No-load Speed	: 0 - 760 rpm
Impact Rate	: 0 - 3,600 bpm
Vo l tage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 4.7 kg

Rotary Hammer with SDS-Max

GBH 5-40 D (0 611 269 0L0)



[1 617 031 245]	***340 pts
Capacity	
Power Input	: 1,100 W
Impact Energy (EPTA)	: 8.5 J
Max. App. in core cutter	: 90 mm
No -l oad Speed	: 170 - 340 rpm
Impact Rate	: 1,500 - 2,900 bpn
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 6.8 kg

GBH 5-40 DCE (0 611 264 070)



Vibration Control	TURBO POWER	1 617 014 144
Capacity		
Power Inpu	ıt	: 1.150 W

Power Input	: 1,150 W
Impact Energy	: 2-11 J
Impact Rate	: 1,500 - 3,050 bpm
No-load Speed	: 170 - 340 rpm
Drilling Dia Concrete	: 12 - 40 mm
Vibration Values Drilli	ng

/Chiselling : 10.5 / 7 / 5 m/s² Voltage : 230 / 240 V Frequency : 50 / 60 Hz

GBH 8-45 D (0 611 265 1L0)



Capacity	
Power Input	: 1500 W
Impact Rate	: 1,380 - 2,760 bpm
Impact Energy	: 12.5 J
Drilling Dia Concrete	: 12 mm - 45 mm
Rated Speed	: 150 - 305 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 8.5 kg

GBH 8-45 DV (0 611 265 OLO)



0.000	1 617 014 145
Capacity	
Power Input	: 1500 W
Impact Rate	: 1,380 - 2,760 bpm
Impact Energy	: 12.5 J
Drilling Dia Concrete	: 12 mm - 45 mm
Vibration Values	
Drilling / Chiselling	: 8/7 m/s²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 8.5 kg

Demolition Hammer

GSH 500 GEN II (0 611 338 6L0)



***100 nts

	100 pt3
Capacity	
Power Input	: 1,100 W
Impact Energy- EPTA Value	: 7.8J
Impact Rate	: 2,900 bpm
Tool holder	: Hex
Auxiliary Handle	: Straight Handle
Weight	: 5.6 kg

Weight : 6.8 kg
* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitles to 6 months warranty. Term and Conditions apply. ** Solo • Bare Tools Only, Batteries, Charger and L-BOXX to Order Seperately. *** Points (Pts) applicable for BeConnected promotion. User have to purchase, scan or manual register participating tools and upload invoices before receiving Pts.

Promo Period: 2nd Jan • 31st Dec 2021. Term and conditions apply.

12V Cordless



1 617 014 137	***170 pt
Capacity	
Power Input	: 650 W
Impact Rate	: 0-3,500 bpm
Impact Force	: 4.3 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.5 kg




[1 607 031 245	***170 pts
Capacity	
Power Input	: 1,100 W
Impact rate	: 2,850 bpm
Impact Energy	: 7.5 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 5.6 kg



[1 017	014 144 ***2/U pts
Capacity	
Power Input	: 1,150 W
Impact Rate	: 1,300 - 2,900 bpm
Impact Force	: 2 - 13 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 6.2 kg









Capacity	
Power Input	: 1,700 W
Impact Rate	: 900 - 1,700 bpm
Impact Force	: 23 J
Vibration Values	Chiselling: 8 m/s²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 11.4 kg

1 617 000 750

***490 pts



	-	200 k
Capacity		
Power Input		: 1,750 W
Impact Rate		: 1,300 bpm
Impact Force		: 45 J
Voltage		: 230 / 240 V
Frequency		: 50 / 60 Hz
Weight		: 16.5 kg





* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitles to 6 months warranty. Term and Conditions apply. ** Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Seperately. *** Points (Pts) applicable for BeConnected promotion. User have to purchase, scan or manual register participating tools and upload invoices before receiving Pts. Promo Period: 2nd Jan - 31st Dec 2021. Term and conditions apply.



Dust Free Solution

The Click & Clean System is not only perfectly thought through, it is also really easy to use: connect the dust extractor and start working! This overview offers you a helpful guide to the tools, part numbers and extras succh as adapters and accessories. You will also find mobile solutions for individual systems.

Listed adapters need to work with vacuum cleaner unless special remarked

Product	Model / Application	Adapter No.	Adapter Picture	Application Picture
GWS Series	Disc 100 mm Disc 115 / 125 mm Keyless	2 608 000 629 2 605 510 224	6	55
*T: Guard assembly Toolless *EA: Easy Adjust *FC: Full Coverd	Disc 115 / 125 mm Max. cutting depth 25 mm	GDE 125 EA-T 1 600 A00 3DJ		
	Disc 125 mm Max. cutting depth 25 mm Disc 230 mm Max. cutting depth 60 mm	GDE 125 FC-T 1 600 A00 3DK GDE 230 FC-T 1 600 A00 3DM		
GSB Series	For all GSB & GBH Holes Ø4-36 mm Holes or core cutter Ø4-24 mm	Dust Cup 1.600.A00.D6H Work without vacuum GDE 24 1600 A01 M9V		1000
	For all GSB & GBH & GBM Holes or core cutter Ø4-68 mm Holes or core cutter Ø24-162 mm	Work with or without vacuum GDE 68 1 600 A00 1G7 GDE 162 1 600 A00 1G8	Dust Cup GDE 24 GDE 68 GDE 68 GDE 68 GDE 162	F
GBH Series	For 50 mm collar tool Holes Ø4-16 mm Or max 82 mm core cutter (Interchangeable adapter included)	GDE 16 Plus 1 600 A00 15Z	913	-42
301	Only for GBH 18V-26 Holes Ø4-16 mm	GDE 18V-16 1 600 A00 51M *Self vacuum		
GSH Series	For chiseling Max length 600 mm	GDE Max 1 600 A00 1G9		
₩	For breaking	GDE HEX 1 600 A00 1GA		- De
GST Series	GST 12 V-LI GST 700	1 619 P10 585 Dust adapter included		
GKS Series	GKS 140 GKS 190 GKS 7000 GKS 12 V-Li GKS 66 X / GKS 18 V-57 GKS 235 Turbo	1 619 PB6 988 1 619 P06 204 1 619 P11 691 1 619 P13 436 1 619 P11 691 1 619 P01 627		

Rotary Hammers application overview

Masonry: Optimal Total range of all application Concrete: Optimal Total range of all application Drilling Drilling in wood in steel Drilling diameter in concrete, masonry (mm) (mm) 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46 48 50 52 up to 20-25 25-30 30-40 up to 10-13 Products Professional **GBH 2-24 DRE** 2 kg Hammers **GBH 2-26 DRE** Professional GBH 2-26 DFR Professional GBH 2-28 DFV Professional GBH 180-LI Professional GBH 18 V-26 2 kg Cordless Hammers GBH 36 V-LI PLUS Professional GBH 36 V-LI Compact Professional **GBH 3-28 DFR** Professional GBH 4-32 DFR **GBH 5-40 DCE** Professional GBH 8-45 D / DV Professional

Drilling with hole saws in wood (mm)		Core cutting application in masonry, concrete (mm)			Mate	erial for	drilling				Other charac	teristics				
up to 30	30-40	40-50	50-70	40-68	68-82	82-90	90-150	Reinforced concrete, granite, stone	Concrete	Bricks, hollow blocks	Hard wood	Soft wood	Metal	Drilling/ Chiselling ratio	Working direction	Special features
								-	•	•	-	-	-	90%	‡	
•								•	٠					90%	‡	
								•	٠					90%	_	
		-						•			-			90%	}	Quick change chuck
٠						•		•						90%		Quick change chuck
					ı			•	•		-			90%		BINGS ESS EXAMPLES
	-	-			ı			•		-	-	-		90%	‡	SEED VIbration MOTOR
	-	-						•	-	-	-			90%	}	MW Vibration
	-	-						•	•		-	٠		100%		SUBJECTION Vibration MOTOR
		-				•		•			-			80% 20%		Quick change chuck
•	-	-						•		-	-		-	70% 30%	t,	Quick change chuck
								•						60%	ţ	Vibration Control
								•		-				50% 50%	ţ	Anti Vibration for GBH 8-45 DV only


Demolition Hammers application overview

Optimal Possible

		Specification									
		Power	Wei	øht	Impact energy	Tool holder	Working	Wall tile removal	Floor tile removal	Joint repair (removal of excess concrete)	De-plastering (removing cement plaster from the walls)
		i owei	wei	giit	impact energy	roornoider	direction				
GSH 3 E Profess	ional	650 W	3.5	kg	4.3 J	SDS-plus	ightharpoons	•		-	•
GSH 5 Profession	onal	1100 W	5.6	kg	7.5 J	SDS-max	$\ $	•	•	•	•
GSH 500 (GEN II) Pro	fessional	1100 W	5.5	kg	6.8 J	17 mm Hex	ightharpoons	•	•	•	•
GSH 5 CE Profess	sional	1150 W	6.2	kg	2-13 J	SDS-max	ightharpoons	•	•	-	•
GSH 9 VC Profess	ional	1500 W	8.5	kg	13 J	SDS-max		•	•	•	•
GSH 11 E Profess	sional	1500 W	10.1	L kg	6-25 J	SDS-max	abla		•	-	•
GSH 11 VC Profes	ssional	1700 W	11.4	1 kg	23 J	SDS-max	abla		•		
GSH 16-30 Profes	ssional	1750 W	16.7	7 kg	45 J	30 mm Hex	4				
GSH 27 VC Profes	ssional	2000 W	29.5	ō kg	69 J	28 mm Hex	4				
	-	Pointed chisel		SDS p	lus/SDS max/H	ex 17/Hex 28/H	lex 30		-	-	-
		Flat chisel		SDS p	lus/SDS max/H	ex 17/Hex 28/H	lex 30				
		Tile chisel		SDS p	lus/SDS max				-		
es		Spade chisel		SDS p	lus/SDS max/H	ex 28/Hex 30		-	-	-	•
Accessories		Gouging chise	I	SDS p	lus/SDS max						
Acc		Bush hammer	head	SDS m	nax						
		Asphalt cutter		SDS m	nax						
4		Tamping plate		SDS m	nax/Hex 28/Hex	: 30					
_		Excavation chi	sel	SDS m	nax/Hex 30						
	2/1										

		Application								
Roughing of concrete walls, columns	Wall chasing or groove cutting on masonry, cement blocks, concrete walls	Concrete wall corrections	Column & beam corrections (removing bulge, exposing reenforcements)	Making cut outs or breaches in masonry wa ll	Hacking of concrete & masonry walls (heavy duty)	Demolition of concrete floor, slabs	Foundation breaking, pavement breaking	Road works (Restoration of Asphalt coverings)	Digging in hard compacted soil	Compacting earth & gravel
		0,0								
	٠									
•	•	•								
•		•								
•		•		•						
•	•	•		•						
			•	•	•	•				
•			•	•	•	•	•	•		
						•	•	•	•	•
									\sim	•
			-			•	•			
	=		=			-			-	
	_									
_	-									
									-	
					25					



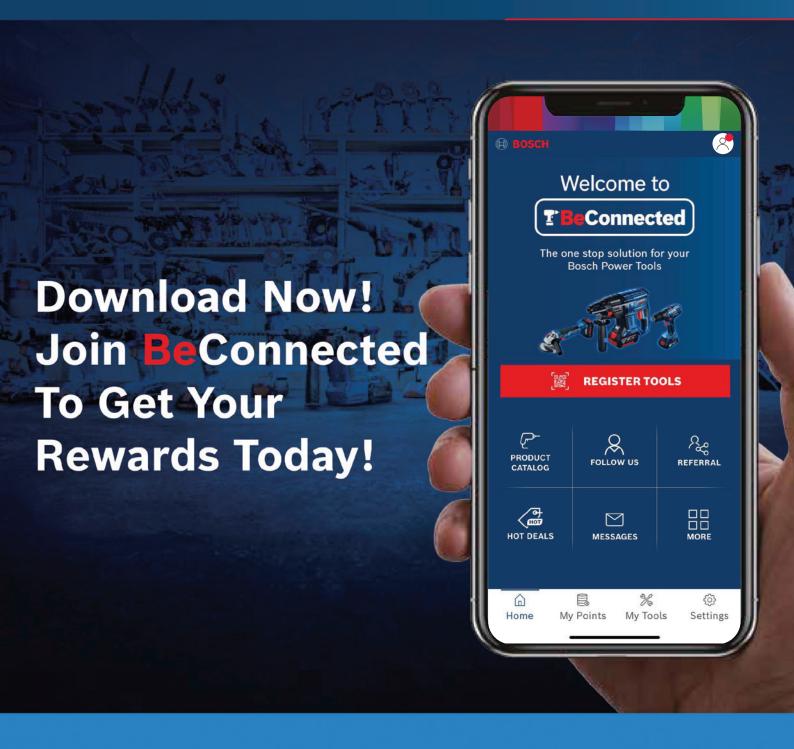





SCAN ME! _{扫描我!}





What is BeConnected App?

Welcome to **Bosch BeConnected!** – a power-packed digital app that enables you to check on our Hot Deals, make purchases, and earn points to redeem for great rewards. Other great user-friendly features include e-warranty, product catalogue, dealers and service centres locator, instant messaging, etc. Read on to discover how to enjoy a better digital lifestyle with **Bosch BeConnected** and download the App today!

BeConnected App Features



Product Catalog

Find genuine product information, video & reviews at your convenience.



Messages

Get alerts on notification here.



Follow Us

Stay in touch with us on Facebook, Instagram, Website or contact us on our hotline.



My Points

Check total points, points used and balance points.



Referral

Invite your friends via Facebook, SMS or link to be part of BOSCH BeConnected community by downloading the app.



My Tools

Check products history and track purchase history.



Hot Deals

Check out the latest promotion and the Best Buys!



Redeem Gifts


Check gifts catalogue and redeem your favorite gifts with your points! You can check redeem history too.

How to download BeConnected App?







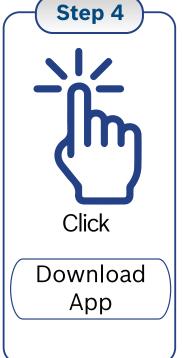









GLM 50-23 G Professional (0 601 072 UK0)

Green Laser Measure with All-rounded Protection

WHY THIS



Green Laser Technology Excellent visibility even in distanced measurement



Robust

Ideal for tough sites due to the highly-protected housing design to meet IP 65 standard



Intuitive

Quick access of preset functions or settings via the dedicated favorites function

HIGHLIGHTS







TARGET USERS: Building construction | Carpenter | Installation | Electrician | Interior designer

8.546 m

20.190 m

6.120 m

Green Laser Technology

For excellent visibility

IP 65

To protect against dust and jet water

Intuitive HMI

For ideal measuring applications with integrated "HELP" guide



Thanks to the rubberized shockabsorbing housing

Favourite Button

Enables quick access of preset functions and settings



Silicone keypad to withstand tough conditions










360° Tilt Sensor

For easy angle measurements and levelling applications

GLM 50-23 G Professional	Unit	Specifications
Part number	-	0.601.072.V
Measuring range	m	0.05 - 50
Measuring accuracy	mm	± 1.5
Measuring range (angle)	0	0 - 360
Measuring accuracy (angle)	0	± 0.2
Laser class	-	2
Laser type	nm, mW	515, < 1
Memory value display	-	Yes (30 values)
Protection rating	-	IP 65
Unit of measurement settings	-	m, ft, in
Battery	-	2 x 1.5V LR6 (AA)
EPTA weight	kg	0.17
Dimensions (L x W x H)	mm	119 x 53 x 29
Scope of delivery (standard)	-	2 x AA battery



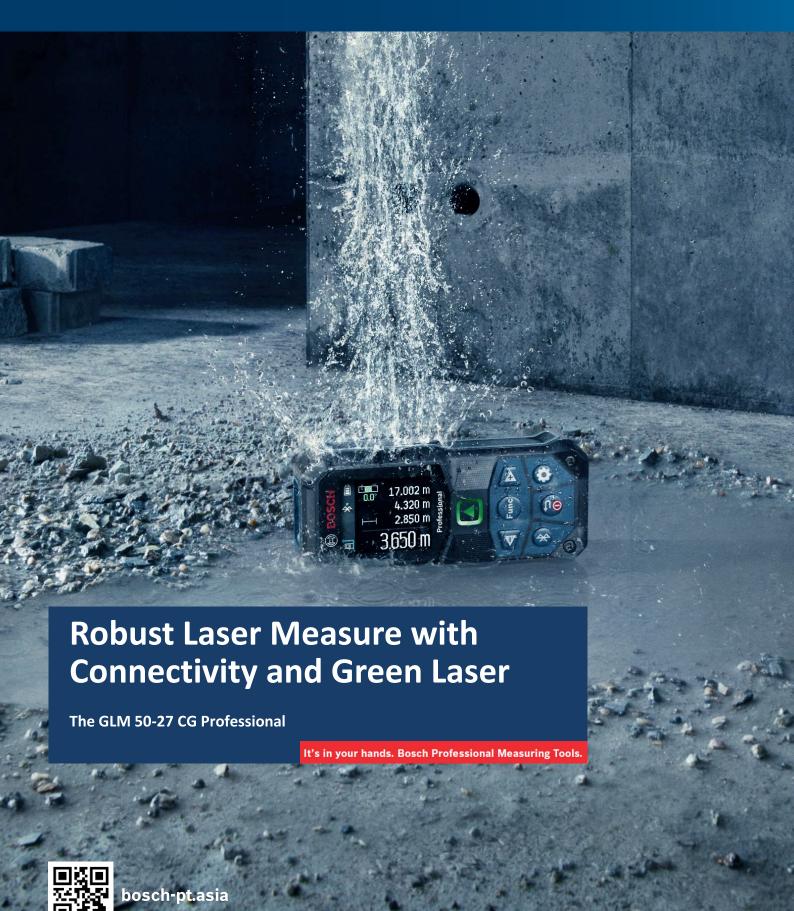

GLM 50-27 CG Professional (0 601 072 VK0)

Robust Laser Measure with Connectivity and Green Laser

WHY THIS



Green Laser Technology Excellent visibility even in distanced measurement under bright conditions



Robust

Ideal for tough sites due to the highly-protected housing design to meet IP 65 standard



Convenient

Quick documentation and data transfer thanks to Bluetooth connectivity via MeasureOn App

HIGHLIGHTS







TARGET USERS:

Building construction | Carpenter | Installation | Electrician | Interior designer

19.020 m

12.060 m

6.485 m

49.043 m

Green Laser Technology

For excellent visibility

To protect against dust and jet water

Intuitive HMI

For ideal measuring applications



Thanks to the rubberized shockabsorbing housing

with integrated "HELP" guide

Sound and Vibration Feedback

To verify success of measurements

Connectivity and App

Enables quick documentation and data transfer via Bluetooth











360° Tilt Sensor

For easy angle measurements and levelling applications








GLM 50-27 CG Professional	Unit	Specifications	
Part number	-	0.601.072.U	
Measuring range	m	0.05 - 50	
Measuring accuracy	mm	± 1.5	
Measuring range (angle)	0	0 - 360	
Measuring accuracy (angle)	0	± 0.2	
Laser class	-	2	
Laser type	nm, mW	515, < 1	
Memory value display	-	Yes (30 values)	
Sound and vibration feedback	-	Yes	
Bluetooth technology	-	Yes (4.2 low-energy)	
Protection rating	-	IP 65	
Unit of measurement settings	-	m, ft, in	
Battery	-	2 x 1.5V LR6 (AA)	
EPTA weight	kg	0.17	
Dimensions (L x W x H)	mm	119 x 53 x 29	
Scope of delivery (standard)	-	Pouch , 2 x AA battery	





The GLL 3-60 XG Professional

It's in your hands. Bosch Professional Measuring Tools.





GLL 3-60 XG Professional (0 601 063 ZK0)

3 x 360° Green line laser — All-round levelling solution

WHY THIS

01

All-round solution

3 x 360° green line laser with 1 horizontal and 2 vertical lines for your everyday levelling needs

02

Visible

Up to 4 times more visible to human eyes compared to red laser thanks to Bosch green laser technology

03

Compact

Slim cone mirror and turret design designated to fulfil various applications including evening concrete plaster

HIGHLIGHTS







TARGET USERS: Carpenters

Drywall constructors

Electricians

Floor

Plumber

Joiner

Laser Receiver

Optional accessories:

Visible

Up to 4 times more visible to human eyes compared to red laser thanks to Bosch green laser technology

Compact

Slim cone mirror and turret design designated to fulfil various applications including evening concrete plaster



Signal tone function with warning signal if deviation by more than 3° in self-levelling mode



All-round solution

3 x 360° green line laser with 1 horizontal and 2 vertical lines for your everyday levelling needs

Robust

IP 54 rated against splash pendulum lock mechanism for

water and dust together with extra protection



Universal Mount

Laser Glasses



Tripod BT 150

GLL 3-60 XG Professional	Unit	Specifications
Part number		0.601.063.ZK0
Working range	m	30 (radius)
Working range (with laser receiver)	m	60 (radius)
Levelling accuracy	mm/m	± 0.3*
Self levelling range	0	± 3
Tripod thread size	п	1/4 & 5/8
Dust and splash water protection	-	IP 54
Laser class	-	2
Laser type	nm, mW	500 - 540, <10
EPTA weight	kg	0.78
Dimensions	mm	149 x 84 x 142
Power supply	-	4 x 1.5V LR6 (AA) batteries
Scope of delivery		Protective bag, hard carrying case,
		4 x AA alkaline batteries, target plate

Laser Rangefinder

								25	60 m		
± 2.0 mm		± 1.5 mm	1 ± 1.5 mm	± 1.5 mm	± 1.5 mm	± 1.5 mm	± 1.5 mm		± 1 mm	+	Typical measuring accuracy
_	10	20 + 1	30 + 1	30	30	20 + 1	20 + 1	50	30		Memory + constant
_	_	_	_	_	_	•	•	_	_	LI-ION	LI-ION
_	•	•	•	•	•	•	•	•	•	I	Dustance, area and volume measurement
_	•	•	•	•	•	•	•	•	•	<u> </u>	Continuous measurement
_	•	•	•	•	•	•	• 15	60 m	•	+/-	Addition/ subtraction
_	_	_	•	_	_	•	•	•	•	Ø.	Corner measuring pin
_	_	_	•	•	•	•	•	•	•		Wall area measurement
_	_	_	_	_	_	•	•	•	•	\bigcirc	Timer function
_	_	_	•	•	•	• 10	00 m •	•	•	min/max	Min./max function
_	_	_	•	•	•	•	•	_	_	4	Incline measurement
_	_	_	•	•	•	•	•	_	_	2	Indirect distance measurement
_	•	•	•	•	•	80 m	•	•	•	/1/1	Single indirect height measurement
_	_	_	•	•	•	•	•	•	•	4 2	Double indirect height measurement
_	_	50 m_	50 m •	50 m ↑	50 m •	_	_	•	•		Stake-out function
- .	0 m ↑	_	_	•	•	_	_	•	•		Trapezium measurement
30 m ↑ —	_	_	_	_	_	_	_	_	•	\rightarrow	Integrated viewfinder
_	_	_	•	_	•	_	_	•	_	*	Bluetooth data transfer
_	_	_	•	_	_	_	_	_	_	•	USB data transfer
GLM 30 GI Professional Prof	LM 40 fessional	GLM 500 Professional		iLM 50-23 G G Professional P			M 100 GLM fessional Profe		1 250 VF fessional		

Leve

Measuring Rod

Laser Rangefinder

GLM 30 (0 601 072 5K0)





Weight

Laser Diode : 635 nm, <1mW Measuring Range* : 0.15 - 30 m Measuring Accuracy : ± 2.0 mm Measuring Units : m / ft : 2 x 1.5 V LR03(AAA) Batteries : 0.1 kg





GLM 40

(0 601 072 9K0)

Capacity Laser Diode : 635 nm, <1mW Measuring Range* : 0.15 - 40 m Measuring Accuracy : ± 2.0 mm Measuring Units : m / ft : 2 x 1.5 V LR03(AAA) Batteries : 0.1 kg Weight

GLM 400 (0 601 072 RK0)





Capacity	
Laser Diode	: 635 nm, < 1 mV
Measurement Range	: 0,05 - 40,00 m
Measurement Accuracy,	Typical: ±1.5 mm
Weight	: approx. 0,1 kg

GLM 500 (0 601 072 HK0)





Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 50 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: m, cm, ft, in
Batteries	: 2 x 1.5V LR03 (AAA
Weight	: 0.1 kg

GLM 50 C (0 601 072 CK0)



LASER 2
Capacity
Laser Diode

Measuring Range* : 0.05 - 50 m Measuring Accuracy : ± 1.5 mm Measuring Units : m, ft, in : 2 x 1.5 V LR03(AAA) Batteries Weight : 0.1 kg

GLM 50-23 G (0 601 072 VK0)







White-	GREENLASER
3/10	Technology

Measuring Range : 0.05 **-** 50.00m Measuring Accuracy : ± 1.5 mm* Measuring Units : m , cm, ft , inch : 2 x 1.5V - LR6 (AA) Battery Tripod compatibility : BT 150 - 1/4 " : IP 65 Protection rating

: 0.17 kg (including battery)

GLM 50-27 CG (0 601 072 UK0)

0





Capacity	
Laser Diode	: 515 nm, < 1nW
Measuring Range	: 0.05 - 50.00m
Measuring Accuracy	: ± 1.5 mm*
Measuring Units	: m , cm, ft , inch
Battery	: 2 x 1.5V - LR6 (AA)
Tripod compatibility	: BT 150 - 1/4 "
Protection rating	: IP 65
Weight : 0.1	7 kg (including battery)

GLM 80 (0 601 072 370)





LAGER	
Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 80 m
Measuring Accuracy	: ± 1.5mm
Measuring Units	: mm, cm, m, ft, in
Batteries	: Lithium-lon
Weight	· 0.14 kg

GLM 100 (0 601 072 P40)





Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 100 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: m, cm, ft, in
Batteries	: Lithium-lon
Weight	: 0.14 kg

GLM 150 C (0 601 072 FK0)





: 650 nm, <1mW
: 0.08 - 150 m
: ± 1.5 mm
: m, cm, ft, in
: 3 x 1.5V LR03 (AAA)
: 0.21 kg

GLM 250 VF (0 601 072 170)





Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 250 m
Measuring Accuracy	: ± 1 mm
Measuring Units	: m, cm, ft, in
Batteries	: 4 x 1.5 V LR03(AAA
Weight	: 0.24 kg



Cordless Inspection Camera

GIC 120 C (0 601 241 2K0)

Dia.of camera head

Length of camera cable



: 8.5 mm

: 120 cm

: 0.6 kg

Capacity	
Batteries	: 4 x 1.5 V (AA) or 10.8 V-LI
Display size	: 3.5"
Display resolution	: 320 x 240 px
SD card storage	: Yes
Photo & vidoo modo	. Voc

Detector

GMS 120 (0 601 081 000)



Capacity	
Max. Measuring Depth	: 120 mm
Live cables	: 50 mm
Wooden beams	: 38 mm
Metal (magnetic)	: 120 mm
Metal (non-magnetic)	: 80 mm
Batteries	: 1 x 9 V 6LR61
Weight	: 0.27 kg

D-tect 120 (0 601 081 3K0)



Capacity	
Detection Mode	: Universal,
	Concrete, Drywall
Detection Object	: Ferrous metals,
non-ferrous metals,	live cables, wooden
objects and water-fi	lled plastic pipes
Max. Detection Depth	: 120 mm
Accuracy	: ± 10 mm
Batteries : 4 x	1.5 V LR6(AA) or 10.8 \
Weight, approx	: 0.5 kg

D-tect 150 SV (0 601 010 008)



Capacity	
Max. Measuring Depth	n: 150 mm
Accuracy	: ± 5 mm
Batteries	: 4 x 1.5V LR6(AA)
Detectable Materials	: Plastic pipes, cables of all kinds, ferrous/non-ferrous metals, wood, cavities.
Weight	: 0.7 kg



Measurement Range' Measurement Accuracy : ±1.8°C / ±2.8°C Emissivity gradings : 0.95, 0.85, 0.75 D:S ratio : 12:1 : 36 mm x 25 mm Display Size : 2 x 1.5V LR6 (AA) Power Supply : 2 x AA battery, pouch Scope of Delivery

GIS 1000 C (0 601 083 340)



Weight

Capacity		
Laser Diode	:	635 nm, <1mW
Working Range*	:	0.1 - 5 m
Measuring Range*	:	- 40°C to + 1000°C
Measuring accuracy	:	± 1.0°C (0°C - 100°C)
Batteries : 4 x	1	.5 V LR6(AA) / 10.8 V
Relative Humidity	:	0 - 100 %
Accuracy	:	± 2 %
Storage Medium	:	200 images

: 0.6 kg

GTC 400 C (0 601 083 150)



Resolution of infrared sensor: 160 x 120 Thermal Sensitivity : < 50 mK Fie**l**d of View : 53° x 43° Focus Distance : ≥ 0.3 m : -10 ~ +400°C Temperature Range Measurement Accuracy : ± 3°C Weight : 0.54 kg



Line Laser

GLL 3-80 (0 601 063 S00)





: 0.76 kg

Capacity	
Laser Diode	: 640 nm, <1mW
Working Range*	: 30 m
Working Range	
With Receiver*	: 5 - 120 m (diameter)
Leveling Accuracy*	: ± 0.2 mm / m
Plane	: 3
Tripod Mount	: 1/4", 5/8"
Batteries	: 4 x 1.5 V LR6(AA)

GLL 3-60 XG (0 601 063 ZK0)



Capacity	
Working Range*	: 30 m (Radius)
Working range	
With Receiver*	: 60 m (Radius)
Levelling Accuracy	: ±0.3 mm/m*
Self-levelling Range/1	ime : ± 3° / <4 sec
Laser Class & Type	:Class 2;
	500-540nm, <10mV

	500-540nm, <10mW
Batteries	:4 x 1.5 V LR6(AA)
Tripod Mount	: 1/4 & 5/8"
Weight	: 0.78 kg

GLL 3-80 CG



Laser Class and Type: Class 2 (500 - 540 nm, <10mW) Working Range* : 5 - 120 m Leveling Accuracy* : ± 0.2 mm / m Self-levelling Range : ± 4° : 1/4 & 5/8" Tripod Mount : 4 x 1.5 V LR6(AA) Batteries or 10.8 V / 12 V Li-lon Battery Weight : 0.5 kg

GLL 30 G (0 601 063 V80)



July-	GREENLASER
THE	Techno l ogy

/ it reciliology	
Capacity	
Laser Diode	: 500 - 540 nm, <5mW
Working Range	: 10 m
Leveling Accuracy*	: ± 4°
Tripod Mount	: 1/4"
Batteries	: 2 x 1.5 V LR6(AA)
Weight	· 0.25 kg

GLL 3-15 X (Bare) (0 601 063 M80)

Weight



Capacity	
Laser Diode	: 630 - 650 nm, <1m\
Working Range*	: 15 m
Leveling Accuracy*	: ± 0.2 mm / m
Self-levelling Range	: ± 3°
Tripod Mount	: 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 0.5 kg

GLL 5-50 X (Kit Set) (0 601 063 N81)



	LASER	•
	Capacity	
	Laser Diode	: 630 - 650 nm, <1mW
	Working Range*	: 15 m
	Working Range	
	With Receiver*	: 5 - 50 m
	Leveling Accuracy*	: ± 0.2 mm / m
	Self-levelling Range	: ± 3°
	Tripod Mount	: 5/8"
	Ratteries	. 4 × 1 5 V I P6(AA)

: 0.5 kg

Point Laser GPL 3 G (0 601 066 N00)

(N)



	_
Capacity	
Laser type	: 500 - 540 nm, < 1nW
Working Range	: Up to 30 m
Levelling Accuracy	: ± 0.35 mm/m
	(± 0.7 mm/m)
Protection rating	: IP 65
Self-leveling range	: ± 4°
Self-leveling time	: < 4 sec
Battery	: 2 x 1.5V LR6 (AA)

: 0.4 kg

GPL 5 G (0 601 066 P00)



Capacity	
Laser type	: 500 - 540 nm, < 1
Working Range	: Up to 30 m
Levelling Accuracy	: ± 0.35 mm/m
	(± 0.7 mm/m)
Protection rating	: IP 65
Self-leveling range	· + 4°

Self-leveling range	: ± 4°
Self-leveling time	: < 4 sec
Battery	: 2 x 1.5V LR6 (AA)
Weight	: 0.4 kg

Electronic Line Laser

GLL 8-40 E (0 601 063 HB1)





		The Long St.
LASER COL	4	NEW
Capacity		
Laser Diode	: 635 - 650	nm, <1mW
Working Range*	: 15 m	
Working Range Wit	h	

Receiver*	: 40 m
Leveling Accuracy	: ± 0.1 mm / m
Self-levelling Range	: ± 3°
Tripod Mount	: 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 1.1 kg

Combi Laser

Weight

GCL 2-15 G (0 601 066 J00)



LASER	7/1/1 Technology
Capacity	
Laser Diode	: 500 - 540 nm, <10mW 635 - 650 nm, <1mW
Working Range*	: 15 m
Dust and splash	· IP 54
protection	: IP 54

working Range"	:	15 M
Dust and splash		
protection	:	IP 54
Leveling Accuracy	:	± 0.3 mm / m
Self-levelling Range	::	± 4°
Tripod Mount	:	1/4", 5/8"
Batteries	:	3 x 1.5 V LR6 (AA)
Weight	:	0.49 kg

GCL 2-50 CG (0 601 066 H80)

Weight



LASER O	GREENLASER Technology
Capacity	
Laser Diode	: 500 - 540 nm, <10mW, 635 - 650 nm, <1mW
Working Range*	: 50 m
Dust and splash p	protection : IP 54
Leveling Accuracy	: ± 0.3 mm / m
Self-levelling Rang	e: ± 4°
Tripod Mount	: 1/4"
Batteries	· 4 x 1 5 V (AA) or

Bosch Li-Ion 10.8 V / 12 V Li-Ion Battery : 0.58 kg

Rotation Laser

GRL 350 HV (0 601 041 \$40)

Weight



LASER SHOW	
Capacity	
Laser Diode	: 630 - 650 nm, <5mW
Working Range	
Without Laser Recei	iver : 60 m (Diameter)
Working Range	
With Laser Receiver	: 350m(Diameter)
Levelling accuracy	: ±0.1 mm/m*
Self-levelling Range,	/Time: ± 5°
Laser class	: 3R
Batteries	: 2xD-cell Batteries
Rotational speed	: 0/150/300/600 min-1

: 1.76 kg

Weight

^{*} The working range can be decreased by unfavorable environment conditions (eg. Direct sun irradiation).

Optical Level

GOL 26 D (0 601 068 000)



Capacity		
Magnification	:	26x
Levelling Accuracy	:	1.6 mm / 30 m
Working Range	:	100 m
Dust and Splash Protection	:	IP 54
Weight	:	1.7 kg

GOL 32 D (0 601 068 500)



Capacity	
Magnification	: 32x
Levelling Accuracy	: 1 mm / 30 m
Working Range	: 120 m
Dust and Splash Protection	: IP 54
Weight	: 1.7 kg





Angle Measurer

GAM 220 (0 601 076 500)



Capacity	
Measurement Range	: 0 - 220°
Accuracy, Angles	: ± 0.1°
Leg Length	: 40 cm
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 1.3 kg

Digital Inclinometer

GIM 60 L



Capacity	
Measurement Range	: 0 - 360°(4 x 90°
Laser working range	: 30 m
Electronics Measurement	
Accuracy 0° / 90°	: ± 0.05°
Electronics Measurement	
Accuracy at 1° - 89°	: ± 0.2°
Batteries (Grade measureme	ent): 1 x 9V 6LR61
(Laser Operation)	2 x AAA LR03
Weight	: 0.9 kg

GIM 120 (0 601 076 800)

Capacity			
Measurement Range	: 0 - 360° (4 x 90°)		
Electronics Measurem	ent		
Accuracy 0° / 90°	: ± 0.05°		
Electronics Measurement			
Accuracy at 1° - 89°	: ± 0.2°		
Length	: 1250 mm		
Batteries	: 4 x 1.5 V LR6(AA)		
Weight	: 1.4 kg		



Laser Receiver

LR 5 (for GLL 5-40 E / GLL 8-40 E) (0 601 069 G80)



Capacity	
Working Range	: 5 - 40 m
Batteries	: 1 x 9 V 6LR61
Dust & Splash Protection	: IP 54

LR 6 (for GLL 5-50 X / GLL 3-80) (0 601 069 H00)



Capacity	
Working Range	: 5 - 50 m
Dust & Splash Prote	ection : IP 54
Measurement Accu	racy
(fine/Rough)	: ± 1 mm / ± 3 mm
Batteries	: 2 x 1.5 V LR03 (AAA)
Weight	: 0.2 kg



Capacity		
Working Range	: 5 - 50 m	
Dust & Splash Prot	ection : IP 54	
Measurement Accuracy		
(fine/Rough)	: ± 1 mm / ± 3 mm	
Batteries	: 2 x 1.5 V LR6 (AA)	
Weight	: 0.15 kg	

LR 7 (for GCL 2-50 CG / GLL 3-80 CG) LR 45 (GRL 350 HV / GRL 300 HVG) (0 601 069 J00) (0 601 069 L00)



Capacity	
Working range (radius	s) : 300 m
Receiving angle	: ±35°
Receiving rotation speed: 150, 300,	
	600 min-1
Battery	: 2 x 1.5V - LR6 (AA)
Protection rating	: IP 66
Weight	: 0.3kg

Tripod

BT 150 (1/4") (0 601 096 B00)



Capacity	
Work Height	: 55 - 157 cm
Tripod Thread	: 1/4"
Weight	: 1.3 kg

BT 150 (5/8") (0 601 096 C80)



Capacity	
Work Height	: 52 - 154 cm
Tripod Thread	: 5/8"
Weight	: 1.1 kg





Tripod BT 160 (0 601 091 200)

Capacity	
Work Height	: 97 - 160 cm
Tripod Thread	: 5/8"
Weight	: 4.1 kg

BT 170 HD (0 601 091 300)

	,
Capacity	
Work Height	: 107 - 165 cm
Tripod Thread	: 5/8" x 11
Weight	: 5.5 kg

Optical Level Measuring Rod



Capacity		
Length	: 2.4 m	
Unit Of Measure	: m / cm	
Weight	: 1.3 kg	

GR 500 (0 601 094 300)



Capacity	
Length	: 5.0 m
Unit Of Measure	: m / cm
Weight	: 1.98 kg

BT 350 (c/w bracket & holder) (0 601 015 B00)



: 140 - 350 cm
: 2.5 kg

Accessories

RM 3 + RC 2 (for GCL 2-50 CG) (0 601 092 800)



Capacity	
Height	: 120 mm
Length	: 135 mm
Weight	: 0.500 kg



Universal Holder

BM 1 (0 601 015 A01)



Capacity	
Mount Thread	: 1/4"
Weight	: 0.5 kg

Bracket

Bracket (for LR 1, LR 1 G, LR 5) (1 608 M00 70F)



Bracket (for LR 6) (1 608 M00 C1L)











 $[\]star$ The working range can be decreased by unfavorable environment conditions (eg. Direct sun irradiation).





GHP - Professional High Pressure Washers GHP 5-13 C (0 615 990 M3A)



	Unit	Specifications
Max Pressure	bar	140
Rated Pressure	bar	130
Rated/Max Flow rate	l/hr	450 / 500
Weight	kg	16.5
Hose lenght	m	8
Lance	-	3-in-1 adjustable vario-fan-jet
Voltage	V	230V (EU) / 240V (UK)
















ADVANCED (Induction motor)

UNIVERSAL

	Easy Aquatak 100 (0 600 8A7 EL0)	Easy Aquatak 110 (0 600 8A7 FL0)	Universal Aquatak 125 (0 600 8A7 AL0)	Universal Aquatak 130 (0 600 8A7 BL0)	Advanced Aquatak 140 (0 600 8A7 DL0)	Advanced Aquatak 150 (0 600 8A7 7L0)
Pressure (bar)	100	110	125	130	140	150
Flow Rate (1/h)	300	330	360	380	450	500
Motor Power (W)	1,200	1,300	1,500	1,700	2,100	2,200
Max. Pressure (bar)	100	110	125	130	140	150
Max. Temp (°C)	40	40	40	40	40	40
Voltage (V)	220 / 240	220 / 240	220 / 240	220 / 240	220 / 240	220 / 240
Frequency (Hz)	20 / 60	20 / 60	20 / 60	20 / 60	20 / 60	20 / 60
Weight (Kg)	3.0	3.8	6.8	7.8	17.6	22.5
Hose (m)	က	က	വ	9	80	80
Self-priming Capable	Yes	Yes	Yes	Yes	Yes	Yes
Accessories Inside Package	- Bosch 360 Gun - High Pressure Detergent Nozzle (350ml) - 3m Hose	- Rotary nozzle - Variable nozzle - High Pressure Detergent Nozzle (450ml) - Water Filter - High Pressure Gun - Lance - High Pressure	- Trio nozzle - Clear New Water Filter - High Pressure Detergent Nozzle (450ml) - Bosch Gun - Standard Lance - High Pressure Hose 5m	- Trio nozzle - Rotary nozzle - Water Filter - High Pressure Detergent Nozzle (450ml) - Bosch Gun - Standard Lance - High Pressure Hose 6m Length	- High Pressure Detergent Nozzle (550ml) - Water Filter - Bosch Gun - Variable Fan Jet - Rotatory Nozzle - Standard Lance - 8m PU High Pressure Hose	- High Pressure Detergent Nozzle (550ml) - 60 ° Fixed Fan Jet nozzle - Variable Fan Jet Lance - Standard Lance - Hose 8m (Steel armed) - Cable 5m - Bosch Gun - High Pressure Hose Reel - Roto Lance









Accessories Kit For BOSCH Easy & Universal Aquatak

Universal x Home & Car Kit (F 016 800 611)

The Car & Home Bundle for your patio and car cleaning







Inside the Box	Usage
Wash brush	Agitates tougher dirt, soft bristles suitable even for delicate surfaces i.e. Windows & Cars
90º nozzle	Great for cleaning wheel arches and hard to reach areas i.e. Gutters
Patio Cleaner	Comfortable and efficient patio cleaning, ideal for larger Patio areas for quicker less time consuming cleaning.

*Not applicable for 360 degree gun (F016 800 536)

Universal x 360° Cleaning Kit (F 016 800 612)

The 360° Bundle for all cleaning needs







Scope of supply

Inside the Box	Usage
Extention hose	Allows wider reach around your home or distance from water / electricity source
Microfibre cloth	For the finishing touch i.e. Polishing car
360º Gun	Ideal for all other task around your home and for your Cars & Bikes, rotating nozzle reaches difficult areas & one handed operation offers more stability with smaller/lighter items i.e wheely bins, garden furniture etc.

Universal x Car Cleaning Kit (F 016 800 572)

The Car Bundle for your car cleaning needs







Scope of supply

Inside the Box	Usage
Wash brush	Agitates tougher dirt, soft bristles suitable even for delicate surfaces i.e. Windows & Cars
Extention hose	Allows wider reach around your home or distance from water / electricity source
90 degree nozzle	Great for cleaning wheel arches and hard to reach areas i.e. Gutters
Microfibre cloth	For the finishing touch i.e. Polishing car

^{*}Not applicable for 360 degree gun (F016 800 536)

High Pressure Cleaner Accessories

Rotary Nozzle (F 016 800 580)



- Aquatak 110, 120, 125, 130 and AQT 42-13



90° Nozzle (F 016 800 581)



- Aquatak 110, 120, 125, 130, AQT 42-13 and 45-14 X



Trio Nozzle (F 016 800 508)



- Aquatak 110, 120, 125, 130 and AQT 42-13



Vario Fan Jet Nozzle (F 016 800 582)



- Aquatak 110, 120, 125, 130 and AQT 42-13



450ml Detergent Nozzle (F 016 800 509)



- All AQT range



Bosch 360° Gun (F 016 800 536)



- Aquatak 100, 110, 120, 125, 130



AquaSurf 250 Patio Cleaner (F 016 800 486)



- Aquatak 110, 120, 125, 130



Suction Nozzle (F 016 800 356)




Aquatak 110, 120, 125, 130, AQT 42-13 45-14 X and 150



Wash Brush (F 016 800 359)



- Aquatak 110, 120, 125, 130, AQT 42-13 45-14 X and 150



Water Filter (F 016 800 577)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



Self-Priming Kit (with Filter) (F 016 800 421)



- All AQT range



Drain Pipe Cleaner 10 m (F 016 800 362)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



High Pressure Hose 6 m (F 016 800 360)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



Extension Hose 6 m (F 016 800 361)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



Adaptor for Karcher Accessories (F 016 800 575)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



Grass Shear



Battery Type Battery Voltage : Lithium-ion : 3.6 V Works with battery capacity: 1.5 Ah No-load runtime : Up to 40 mins Battery charge time : 3 h Shrub blade length (cm) : 12 cm Grass shear width (cm) : 8 cm Tooth spacing : 8 mm

Area cut per

battery charge, max : 22 m2 Weight (g) : 530g



Hedgecutter



Motor Power Blade Length : 480 W : 50 cm Tooth Opening : 26 mm No-load Stroke Rate : 3.400 sPM Cable Line : 10 m : 91 dB(A) Sound Power Leve Weight : 3.5 kg



Grass Trimmer



Capacity

: 280 W Motor Power Cutting Size : 23 cm Cutting System : Semi-auto Spool : 12.500 rpm **Cutting Speed** : 1.6 mm x 4 m : F016800569 Spool Spool P/N

Weight Tool Dimensions

 $(L \times W \times H)$: 790 x 263 x 902mm

: 1.9 kg

Weight Packed : 2.6 kg







Lawn Mower



Capacity

Min Cutting Height **Cutting Height** 15 - 43 mm **Cutting Width** : 38 cm Blade : 5 Bladed Cylinder Roller : Yes Self Propelling : No Fuel Type : Hand Push Product Dimensions : 540 x 490 x 380mm (L x W x H) Grass Box Capacity : 25 Litres

Grass Box P/N : 0 600 886 160 Weight : 7.5 kg







-	The state of the s
Capacity	
Motor	: Powerdrive
Motor Power	: 1.200 W
Torque	: 13 Nm
Cutting Height	: 20 - 60 mm; 3-fold
Grass Combs	: Yes
Grass Box Capacity	: 31 L
Handle Type	: Standard
Integrated carrying h	andles : No
Cutting System	: Rotary B l ade
Power Cable	: 10m
Blade Width	: 32 cm
Blade P/N	: F 016 800 340
Weight	: 6.8 kg



Replacement Blade for Rotak 32-12 (F 016 800 340)





Warranty

This serves to inform you that all Bosch Power Tools are guaranteed against manufacturing defects for a period 6 months from the registered date of purchase (Bosch Measuring Tools, GHP Range High Pressure Washer and HEAVY DUTY Range Power Tools are entitled to 1 Year Warranty. Bosch Range Power Tools, Bosch Hot Air Guns, Bosch Batteries, Bosch Chargers, Bosch Aquatak High Pressure washer and Garden Tools are entitled to 6 months warranty. Term and Conditions apply). For the same defect repair within warranty period, a maximum 3 times warranty repair are allowed for Bosch Power Tools, 2 times for Bosch Measuring Tools and Bosch Home & Garden Tools. This guarantee, however, does not cover damage caused by accident, misuse, unauthorized repairs, tampering, normal wear & tear, additions and modifications made to the tool in any manner. In case of complaint, please send the tool, undismantled together with official proof of purchase, i.e. tax invoice or receipt stated with tool's serial no., to Bosch Power Tools Authorised Service Centre.

Jaminan

Dimaklumkan bahawa tempoh jaminan untuk Alat-alat kuasa Bosch akibat kecacatan product semasa pengilangan adalah terhad kepada 6 bulan sahaja bermula dari tarik pembelian (Alat Pengukur Bosch, Siri Pencuci Tekanan Tinggi GHP Bosch dan Siri HEAVY DUTY Alat-alat Kuasa Bosch Produk tempoh jaminannya 1 Tahun. Alat-alat Kuasa Bosch Range, Alat Pengering Bosch, Bateri Bosch, Pengecas Bateri Bosch, Pembersih tekanan tinggi dan Alat Kebun Tempoh Jaminannya 6 bulan. Tertakluk kepada Terma and Syarat). Jumlah maksimum pembaikian dalam tempoh jaminan adalah terhad kepada 3 kali sahaja untuk Alat-alat kuasa Bosch, 2 kali sahaja untuk Alat-alat Pengukur Bosch dan Alat-alat Kuasa Halaman Bosch. Tempoh jaminan ini tidak termasuk kerosakan akibat kemalangan, penyalahgunaan, membaikpulih yang tidak diakui, haus yang sepatut ada dan pengubahsuaian yang mengakibatkan kerosakan Alat-alat kuasa tersebut. Bagi sebarang pengaduan, sila hantar Alat-alat Kuasa dan tax invois rasmi atay resit rasmi sebagai bukti pembelian yang dilengkapi dengan nombor siri Alat-alat Kuasa ke Pusat Servis Alat-alat Kuasa Bosch Yang Sah.

保证

谨此通知,有关所有博世电动工具享有为期六个月之生产损坏保证,有效期由购买登记日算起(博世测量仪器,博世GHP 高压清 洗机系列及博世 HEAVY DUTY系列产品享有1年保证。博世系列电动工具,博世热风机,博世电池,博世充电器,高压清洗机 和园林工具享有6个月保证。须符合条规)。在维修保证期间,博世电动工具享有高达三次维修服务,而博世测量仪器及博世家园 电动工具则享有**两次**维修服务。上述保证并不包括有关电动工具因意外、错误使用、非授权维修、正常的磨损、附加及修换或其 他方式所造成的损坏及故障。若有任何投诉,请将阁下完整的电功工具和**购买税务发票**或付款收据及具备电功工具编号交到您的 博世电动工具授权维修中心。

Key To Symbols



Electronic Control



Rotation Stop



Constant Electronic



Forward / Reverse Rotation



Overload Clutch



Slim Grip



Inox For a perfect finish on stainless steel



Spindle



Saw Blade Pendulum Action



Dust Extraction



Bosch SDS System



SDS-Plus Tool Holder



Fine Depth Adjustment



Distortionresistant protective



SDS-Max Tool Holder



SDS-Plus Quick Exchange System



SDS-Clic Quick Clamping



Velcro Fastening



Easy Fit



Kick Back Stop



Turbo Blower

guard



Removable



Torque



Restart Protection



Direct Cooling and Additional Air Inlets



Brushless EC Motor



Restart Protection



Intelligent Brake System



Drop Control
















While all care has been taken to ensure that the information contained in this publication is correct, no responsibility can be accepted for any inaccuracy. The Company reserves the right to alter or modify the information contained herein at any time in light of technical or other developments. Technical specification are valid under normal operating condition only.

The company does not accept any responsibility for any misuse of the product and cannot be held liable for consequential damage.

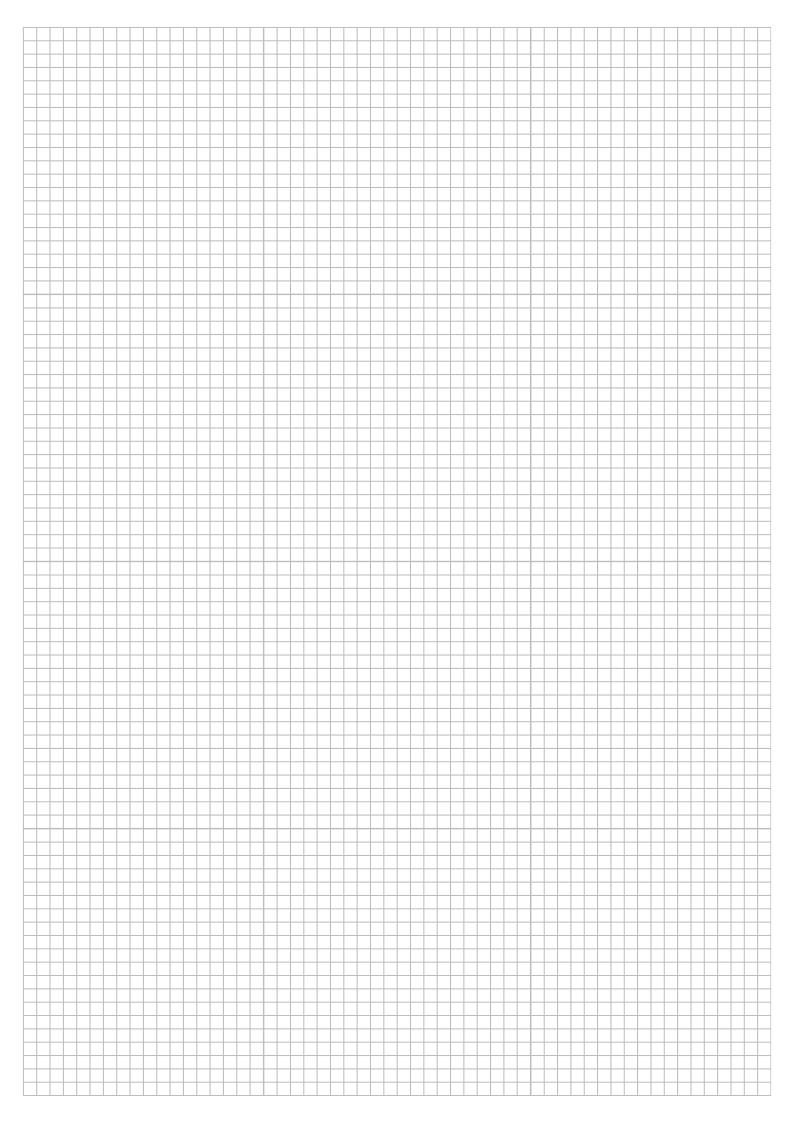







Visit our nearest Authorised Service Centre to service your Bosch Power Tools and to purchase tools spare parts.

Robert Bosch Sdn Bhd (220975-V)

No. 8A, Jalan 13/6, 46200 Petaling Jaya, Selangor Darul Ehsan, Malaysia. Tel: +603 - 7966 3000 Fax: +603 - 7958 3838



TK JAYA AUTO TRADING

While all care has been taken to ensure that the information contained in this publication is correct, no responsibility can be accepted for any inaccuracy. The Company reserves the right to alter or modify the information contained herein at any time in light of technical or other developments. Technical specification are valid under normal operating condition only.

The company does not accept any responsibility for any misuse of the product and cannot be held liable for consequential damage.



For further enquiries, please contact **1 800 880 188**

Bosch Service Concept Stores