




BOSCH

PROFESSIONAL POWER TOOLS CATALOGUE



Scan here for e-catalogue

August 2023



MOVE AT WILL

Mobility and durability you can trust. Featuring cross-range battery compatibility and a long-lasting brushless motor, the Bosch 18V range lets you move with the confidence of knowing that you have the right tool in your hand, always.

Bosch Professional.



BOSCH

GBH 187-LI One Chuck (0 611 923 1L0)

Live the freedom that your work demands.

NEW!

WHY THIS

- 01 Efficiency Champion**
More efficiency of work by brushless motor and optimizing mechanism for drilling many holes on just one charge
- 02 One Chuck**
A single chuck that can fit both SDS-plus and cylindrical / hex shank drill bits for wide range of applications
- 03 Work-life Secured**
Better production by KickBack Control, Vibration Control and compatible with dust extractor solution

One Chuck ^{USP}
A single chuck that can fit both SDS-plus and cylindrical / hex drill bits for your wide range of applications

Efficiency Champion ^{USP}
More holes per battery charge

Constant Speed
Motor speed and tool output power remain constant while battery charge is being consumed

Connectivity & HMI ^{USP}
Enables connection with tools for easy access, customization, maintenance, and device management

KickBack Control ^{USP}
Intelligent sensor to stop the tool in the event of accidental tool kick back

Vibration Control
Design to absorb and evenly distribute vibration to much lower level

L-Shape Design
Better weight balance with vertical positioning of motor

Dust Free Drilling
Compatible with existing dust solutions



TARGET USERS

- Electrician
- Plumber
- HVAC
- Concrete Core Construction



| GBH 187-LI One Chuck | Unit | Specifications |
|--------------------------|------|--|
| Impact energy | J | 2.4 |
| Voltage | V | 18 |
| No-load Speed | rpm | 0 - 980 |
| Impact rate | bpm | 0 - 4,350 |
| Max. drilling Ø concrete | mm | 24 |
| Max. drilling Ø steel | mm | 13 |
| Max. drilling Ø wood | mm | 30 |
| Bare Tool weight | kg | 2.9 |
| Working LED | - | Yes |
| Recommended battery | - | GBA 4.0/5.0/6.0 Ah ProCORE 8.0/12.0 A |

270 pts

GBH 185-LI (06119240L1)

Power packed, fully in your control!

NEW!

WHY THIS

- 01 Constant Speed**
More holes drilled per battery charge and stable power output, due to its powerful 18V brushless motor with constant speed
- 02 Safety In Control**
Enhanced safety against accidental jams and reduced vibration exposure due to KickBack Control and Vibration Control
- 03 Dust In Control**
Dust-free work condition by working along with GDE 12 extractor

Constant Speed ^{SP}
More holes per battery charge and continuous power output, due to Bosch 18V brushless motor with constant speed

Vibration Control ^{SP}
Minimized vibration effects with the help of Vibration Control

Dust Free Drilling ^{USP}
Compatible with Auto Power GDE 12 dust extraction attachment, for Dust-free drilling experience


Trigger in Drilling Axis ^{SP}
Easy handling via ergonomic compact design with trigger and drilling axis alignment

KickBack Control ^{USP}
Injury prevention through kickback control, which automatically halts tool operation



TARGET USERS

- Electrician
- Cabinet Installer & Carpenter
- HVAC



GDE 12 Cordless Dust Extractor (1600A02BW0)



| Capacity | |
|--------------------------|---------------------|
| Voltage | : 18 V |
| Working Modes | : Hammer drill only |
| Dust Collection Material | : Concrete only |
| Compatible with | : GBH 185-LI |
| Drilling Diameter | : 4 - 12 mm |
| Maximum Drilling Depth | : 100 mm |
| Max. Drill bit Length | : 165 mm |
| Weight | : 1.1 kg |

| GBH 185-LI | Unit | Specifications |
|-----------------------------------|------|-------------------------------|
| Voltage | V | 18 |
| Working modes | - | Drill / Hammer drill / Chisel |
| Impact energy | J | 1.9 |
| No-load speed | rpm | 0 - 1,050 |
| Impact rate | bpm | 0 - 4,675 |
| Drilling Ø in concrete | mm | 4-22 |
| Max. drilling Ø in steel | mm | 13 |
| Max. drilling Ø in wood | mm | 20 |
| Bare tool weight with aux. handle | kg | 2.3 |
| Working LED | - | Yes |
| Recommended battery | - | GBA 18V ≥4.0 Ah |

200 pts

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo – Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

18V Cordless
 18V BITURBO
 12V Cordless
 Battery, Charger, L-BOX, Trolley, Roller
 Drill, Impact Drill, Multi Cutter, Foam Cutter, Mixer Drill
 Straight Grinder, Angle Grinder, Bench Grinder
 Diamond Cutter, Reciprocating Saw, Shear, Nibbler
 Jigsaw, Circular Saw
 Cut Off Machine, Mitre Saw, Table Saw
 Planer, Sander, Polisher, Hot Air Gun, Router, Clevis Gun, Blower, Vacuum
 Rotary Hammer, Demolition Hammer

GSR/GSB 18V-90 C Solo** (0 601 9K6 0L0 / 0 601 9K6 1L0)

Compact head length and perfect tool control

HEAVY DUTY

NEW!

WHY THIS

- 01 **Powerful Brushless Motor**
Which delivers high power with 64 Nm and 2,100 rpm maximizing your efficiency on the job site
- 02 **Switchable Kickback Control**
Which reduces the risk of sudden rotational torque reaction and therefore offers perfect tool control at any time
- 03 **Switchable Precision Clutch**
Stops the overriding once a set torque level is reached and therefore, reduces the wear and tear of the clutch and the resulting noise

Powerful Brushless Motor

Which delivers unrivalled power with 64 Nm and 2,100 rpm maximizing your efficiency on the job site

Precise Screw Driving

Engaging a clutch with 20 precision torque settings

Extremely Robust

13 mm Röhm metal chuck and metal gearbox for fast drilling and driving applications

Switchable Precision Clutch via User Interface ^{USP}

Stops the overriding once a set torque level is reached and therefore, reduces the wear and tear of the clutch and the resulting noise

Individual Tool Settings

Due to connectivity interface for easy change of tool parameters

Switchable Kickback Control via User Interface ^{USP}

Which reduces the risk of sudden rotational torque reaction and therefore offers perfect tool control at any time

Strong and Compact

Brushless motor which delivers top performance with 64 / 36 Nm and compact head length of 163 mm(GSR) / 175 mm(GSB) to make tough work easier



TARGET USERS

• Cabinet Installer • Property Manager • Elec. Residential • Plumber • HVAC



| GSR/GSB 18V-90 C Solo** | Unit | Specifications |
|--------------------------------|------|---------------------|
| Rated voltage | V | 18 |
| Battery capacity | Ah | 4.0 ProCore |
| No-load speed | rpm | 0 - 630 / 0 - 2,100 |
| Impact rate | bpm | - / 0 - 29,500 |
| Max. torque (hard/soft) | Nm | 64 / 36 |
| Chuck capacity | mm | 13 |
| Max. screw / drilling diameter | mm | 12 / 68 |
| Head length | mm | 163 / 175 |

90 pts

GWS 18V-10 P Solo** (0 601 9J4 1K0)

Cordless angle grinder

HEAVY DUTY

NEW!

WHY THIS

- 01 **Highest user safety with paddle switch**
- 02 **Industrial Power & performance**
- 03 **Comfortable & convenient whilst working**

Ease Of Use

Slim grip size & anti-vibration handle for comfortable handling & lower fatigue. Keyless guard and quick clamping nuts for convenient usage

Industrial Power & Performance
1000W cored equivalent power and optimized performance with ProCore 8.0 batt. Longer runtime per batt. charge & higher cutting efficiency thanks to Brushless motor

Highest User Safety ^{USP}

KickBack control, Drop control, Intelligent brake system, Restart Protection, PROtection switch




Protection Switch

Paddle switch for immediate shutdown when releasing the trigger.



TARGET USERS

• HVAC • Electricity Supply / Electrical Lineman



| GWS 18V-10 P Solo** | Unit | Specifications |
|---------------------|------|----------------|
| Voltage | V | 18 |
| No-load speed | rpm | 9,000 |
| Disc diameter | mm | 100 |
| Spindle size | - | M10 & M14 |
| Weight w/o battery | kg | 1.8 / 1.9 |
| Grip size | mm | 160 |

100 pts

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

18V Cordless
18V BITURBO
12V Cordless
Battery, Charger, L-BOXX, Trolley, Roller
Drill, Impact Drill, Multi Cutter, Foam Cutter, Mixer Drill
Straight Grinder, Angle Grinder, Bench Grinder
Diamond Cutter, Reciprocating Saw, Shear, Nibbler
Jigsaw, Circular Saw
Cut Off Machine, Mitre Saw, Table Saw
Planner, Sander, Polisher, Hot Air Gun, Refiner, Cleam, Blower, Vacuum
Rotary Hammer, Demolition Hammer

18 V Li-Ion Bosch Heavy Duty

GSR 18V-50 Cordless Drill / Driver (0 601 9H5 0L0)

HEAVY DUTY



120 pts



| Capacity | |
|-------------------------|-----------------------|
| Battery Voltage | : 18 V / 2.0 Ah |
| Max.Torque(hard/soft) | : 50 / 28 Nm |
| Chunk Type | : Metal |
| No-load speed | : 0-460 / 0-1,800 rpm |
| Drilling Dia.: In Steel | : 13mm |
| In Wood | : 35mm |
| Max. Screw | : 10mm |
| Charger | : GAL 18V-40 CV |
| Charging Time | : 40 mins |

GSB 18V-50 Cordless Impact Drill (0 601 9H5 1L0)

HEAVY DUTY



120 pts



| Capacity | |
|-------------------------|-----------------------|
| Battery Voltage | : 18 V |
| Max.Torque(hard/soft) | : 50 / 28 Nm |
| Chunk Type | : Metal |
| No-load speed | : 0-460 / 0-1,800 rpm |
| Drilling Dia.: In Steel | : 13mm |
| In Wood | : 35mm |
| In Masonry: | 13mm |
| Max. Screw | : 10mm |
| Charger | : GAL 18V-40 CV |
| Charging Time | : 40 mins |


GSR 18V-60 FC Solo** Cordless Drill / Driver (0 601 9G7 1L0)

HEAVY DUTY



Due to BeConnected System optional accessories

150 pts



| Capacity | |
|-------------------------|------------------------|
| Battery Capacity | : 18 V |
| Drilling Dia.: In Steel | : 13mm |
| In Wood | : 38 mm |
| Max.Torque(hard/soft) | : 60 / 31 Nm |
| No-load speed | : 0 - 6000 / 1,900 rpm |
| Weight | : 0.9 kg |

GWS 18V-10 Solo** Cordless Angle Grinder (0 601 9J4 0K0)

HEAVY DUTY



100 pts



| Capacity | |
|--------------------|---|
| Battery Voltage | : 18 V |
| No-Load Speed | : 9000 rpm |
| Max Output Power | : Equivalent to 1000W corded tool (w/PRoCORE) |
| Grip Circumference | : 155mm |
| Disc | : 100mm (M10) |
| Weight | : 2KG (Tool only) |
| Charger | : GAL 1880 CV |
| Charging Time | : 65 mins |

GDX 18V-200 C Cordless Impact Wrench / Driver (0 601 9G4 2L0)

HEAVY DUTY



200 pts



| Capacity | |
|-------------------------|----------------------------|
| Battery Voltage | : 18 V / 4.0Ah |
| Max. Torque | : 200 Nm |
| No-load Speed | : 1- 1,100/2,300/3,400 rpm |
| Impact Rate | : 0- 2,300/3,400/4,200 rpm |
| Head Length | : 147 mm |
| Weight (w/o battery) | : 1.17 kg |
| Bit Holder/Square Drive | : 1/4" Hex 1/2" Square |
| Charger | : GAL 18V-40CV |
| Charging Time | : 60 mins |

GDS 18V-400 Cordless Impact Wrench (0 601 9K0 0L0)

HEAVY DUTY



180 pts



| Capacity | |
|--------------------------|-----------------|
| Battery Voltage | : 18 V |
| Max. Torque | : 400 Nm |
| No load Speed | : 0 - 2,500rpm |
| Impact Rate | : 0 - 3,700 bpm |
| Head Length | : 172 mm |
| Weight (w/o battery) | : 1.25 kg |
| Weight (w GBA 18V 5.0Ah) | : 1.85 kg |



GLI 18V-LI VARILED Solo** Cordless Jobsite Light (0 601 443 400)

HEAVY DUTY



30 pts

| Capacity | |
|---------------------|---------------|
| Battery Voltage | : 18 V |
| Luminous Flux | : 420 Lumen |
| Max. operating time | : 135 mins/Ah |
| Weight | : 0.3 kg |

GLI 18V-1900 Solo** Cordless Light (0 601 446 400)

HEAVY DUTY



70 pts



| Capacity | |
|-----------------|---------------------|
| Battery Voltage | : 18 V |
| Max. Brightness | : 1900 lm |
| Dimensions | : 292 x 187 x 69 mm |
| Runtime | : 100 min / Ah |
| Weight | : 1.6kg |

GSA 18V-LI C Solo** Cordless Sabre Saw (0 601 6A5 080)

HEAVY DUTY



80 pts

| Capacity | |
|----------------------|----------------|
| Battery Voltage | : 18 V |
| Stroke Length | : 21 mm |
| No load Stroke Rate | : 0- 3,050 spm |
| Cutting Dept In Wood | : 200 mm |
| in Metal | : 100 mm |



GSA 18V-32 Solo** Cordless Sabre Saw (0 601 6A8 108)

HEAVY DUTY



200 pts

| Capacity | |
|-----------------------|-----------------|
| Battery Voltage | : 18 V |
| Stroke Length | : 32 mm |
| No-load Stroke Rate | : 0 - 2,500 spm |
| Cutting Depth In Wood | : 230 mm |
| in Metal | : 175 mm |
| Weight | : 3.5 kg |

GST 18V-LI B Solo** Cordless Jigsaw (0 601 5A6 100)

HEAVY DUTY



120 pts

| Capacity | |
|------------------------|-----------------|
| Battery Voltage | : 18 V |
| No-load Stroke Rate | : 0 - 2,700 spm |
| Stroke Height | : 23 mm |
| Cutting Depth In Metal | : 8 mm |
| In Wood | : 120 mm |
| In Aluminium | : 20 mm |
| Slanted Cuts | : 0 - 45° |
| Weight Incl. Battery | : 2.4 kg |

GKS 18V-57 Solo** Cordless Circular Saw (0 601 6A2 2L0)

HEAVY DUTY



130 pts

| Capacity | |
|---------------------------------|-------------|
| Battery Voltage | : 18 V |
| No-load Speed | : 3,400 rpm |
| Blade Diameter | : 165 mm |
| Saw Blade Bore Diameter | : 20 mm |
| Max. Cutting Capacities at 90°: | 57 mm |
| at 45°: | 39 mm |
| Weight | : 4.1 kg |

GAS 18V-1 Solo** Cordless Vacuum Cleaner (0 601 9C6 2L0)

HEAVY DUTY



40 pts

| Capacity | |
|---------------------------|--------------|
| Battery Voltage | : 18 V |
| Container Vol. | : 700 ml |
| Max. Underpressure | : 6 kPa |
| Max. Airflow | : 10 l/sec |
| Speeds | : 1 Speed |
| Runtime | : 7 min / Ah |
| Weight (w/o batt, w/o AC) | : 1.3 kg |

GAS 18V-10L Premium Solo** Cordless Vacuum Cleaner (0 601 9C6 3K0)

HEAVY DUTY



70 pts

| Capacity | |
|----------------------------------|--------------------|
| Battery Voltage | : 18 V |
| Max. Vacuum | : 90 mbar |
| Max. Airflow | : 24 l/sec |
| Max. Runtime with 6.0 Ah Battery | : 24 min |
| Dust Class (EU Standard): | L-class |
| Container Vol,Gross/net: | 10/6 litre/gallons |
| Weight | : 4.6 kg |

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User has to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

GBL 18V-120 Solo**
Cordless Blower
(0 601 9F5 1L0)

HEAVY DUTY



40 pts

| Capacity | |
|-----------------------|------------------------|
| Battery Voltage | : 18 V |
| No-load Speed | : 17,000 rpm |
| Air Speed, Max | : 75 m/s |
| Air Volume | : 2.0 m³/min |
| Runtime | : Speed I: 9 min / Ah |
| | : Speed II: 5 min / Ah |
| Weight without Cable: | 1.1 kg |

GSS 18V-LI Solo**
Cordless Orbital Sander
(0 601 9D0 2L0)

HEAVY DUTY



40 pts

| Capacity | |
|--------------------|----------------|
| Battery Voltage | : 18 V |
| No-load Speed | : 11,000 rpm |
| Orbital Rate | : 22,000min-1 |
| Orbital Diameter | : 1,6 mm |
| Pad Size | : 113 x 101 mm |
| Sanding Paper Size | : 114 x 140 mm |
| Weight | : 1.0 kg |

GCB 18V-63 Solo**
Cordless Band Saw
(0 601 2A0 400)

HEAVY DUTY



130 pts

| Capacity | |
|-------------------------|-----------------------|
| Battery Voltage | : 18 V |
| Cutting Capacity | : 63.5 x 63.5 mm |
| Saw Blade | |
| Dimensions | : 733 x 12.7 x 0.4 mm |
| No-load Speed | : 162 m/min |
| Weight without Battery: | 3.3 kg |

GBH 18V-26 Solo**
Cordless Rotary Hammer
(0 611 909 000)

HEAVY DUTY



160 pts

| Capacity | |
|-----------------|-----------------|
| Battery Voltage | : 18 V |
| In Concrete | : 4 - 26 mm |
| In Steel | : 13 mm |
| In Wood | : 30 mm |
| Impact Energy | : 2.6 J |
| Rated Speed | : 0 - 980 rpm |
| Impact Rate | : 0 - 4,350 bpm |
| Weight | : 3.5 kg |

GDE 18V-16
Cordless Dust Extractor
(1 600 A00 51M)



| Capacity | |
|-------------------|-------------------|
| Compatible with | : GBH 18V-26 only |
| Drilling Diameter | : Max. 16 mm |
| Max. Drilling | : 100 mm |
| Weight | : 1.2 kg |

GRG 18V-16 C Solo**
Cordless Rivet Gun
(0 601 9K5 080)

HEAVY DUTY



430 pts

| Capacity | |
|--------------------|----------------|
| Battery Voltage | : 18 V |
| Motor | : Brushless |
| Pulling Force | : 16,000 N |
| Stroke Length | : 25 mm |
| Rivet Diameter | : 3.0 - 6.4 mm |
| Weight w/o Battery | : 1.6 kg |



GHG 18V-50 Solo**
Cordless Heat Gun
(0 601 2A6 580)

HEAVY DUTY



70 pts

| Capacity | |
|-------------------------|--|
| Battery Voltage | : 18 V |
| Heat up Time | : <6 sec (up to 300°C) |
| Temperature Lvl | : 2 (300/600°C) |
| Max. Airflow (in l/min) | : 175 |
| Accessories | : Reduction nozzle, Reflection nozzle |

GKM 18V-50 Solo** (0 601 6B8 080)

Quick and precise cuts in metal – nearly spark-free

HEAVY DUTY

NEW!

WHY THIS

- Nearly Spark-Free Working**
- Accurate Cuts**
- Ergonomic Handling**

Handling & Ergonomic Design

Optimized ergonomic grip for cutting in all positions with a compact, well-balanced design

Saw Hook

Easy storage solution between cuts



Integrated & Robust Chip Box

Hassle free, integrated chip collection with no need for additional vacuum hose

Steel Baseplate

High durability and accuracy by intuitive cutting line indicator

LED & Viewing Window

High visibility for precise cutting

Standard For Steel Saw Blade

Optimized for cordless saws to maximize battery runtime

TARGET USERS

• Industrial Metal Fabrication • Roofing + Framing



| GKM 18V-50 Solo** | Unit | Specifications |
|------------------------|------|----------------|
| Voltage | V | 18 |
| Balde size / Bore size | mm | 136 / 20 |
| No-load Speed | rpm | 4,250 |
| Cutting depth, 90° | mm | 50 |
| Weight solo | kg | 2.2 |

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo – Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

18V Cordless
18V BITURBO
12V Cordless
Battery, Charger, L-BOX, Trolley, Roller
Drill, Impact Drill, Multi Cutter, Foam Cutter, Mixer Drill,
Straight Grinder, Angle Grinder, Bench Grinder

Diamond Cutter, Reciprocating Saw, Shear, Nibbler
Jigsaw, Circular Saw
Cut Off Machine, Mitre Saw, Table Saw
Planes, Sanders, Polisher, Hot Air Gun, Reamer, Cle Gun, Blower, Vacuum
Rotary Hammer, Demolition Hammer

**REVOLUTIONARY
 PERFORMANCE.
 FEEL THE EXTREME.**



NEW STANDARDS IN PERFORMANCE WITH LESS WEIGHT AND MAXIMUM OOMPH

Maximum Power | Maximum output in combination with ProCORE18V batteries. Up to 1,800 watts of corded power.

Perfect handling | BITURBO tools are lightweight, compact and impress with perfect ergonomics. With just one ProCORE18V battery, they perform as well as competitor Tools with two batteries.

Ultimate control | Multiple clever technologies make your work safer, faster and more efficient.

Fully compatible | Compatible with all new and existing Batteries and chargers from the Professional 18V System. For maximum power, use ProCORE18V 8.0 or 12.0 Ah batteries.

New high-performance motor



Our most powerful battery ever

BITURBO Brushless: Up to 1,800 watts of corded power.

ENGINEERED FOR HIGHEST PERFORMANCE AMONGST 18V SYSTEM

The Professional 18V System combines highest performance with compact dimensions and minimum weight to make your toughest jobs easier. Benefit from the ultimate in performance, uncompromising compatibility and maximum freedom on your job site.

**+87%¹
 MORE
 POWER**

ProCORE18V: latest cell technology and intelligent battery management.



**Up to +135%²
 LONGER
 LIFETIME**

COOLPACK 2.0 technology: prevents the battery from overheating.

**Up to +151%³
 EXTENDED
 RUNTIME**

Excellent battery performance: When other batteries switch off, you just keep working.



**PERFECTLY
 ENGINEERED FOR HIGHEST
 PERFORMANCE.**

**9 min to 50%⁴
 FASTEST
 CHARGING**

Get back to work faster than ever thanks to the world charging champion GAL 18V-160 C Professional.



EXPERIENCE A NEW WAY OF WORKING WITH BITURBO TOOLS AND APP


Connect BITURBO Tools with App for Maximum Efficiency & Customization




Compatible with iOS and Android



GY 42 installed on tool for tool to connect to APP

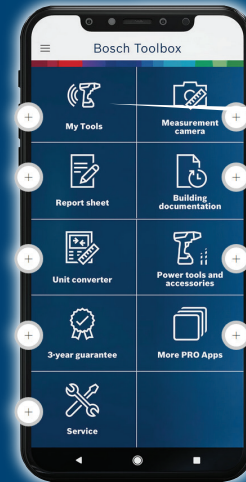

Bosch ToolBox APP





Connected tools can be found in My Tools within Bosch Toolbox APP

World's First Levelling Function




GSR/B 18V-150 C

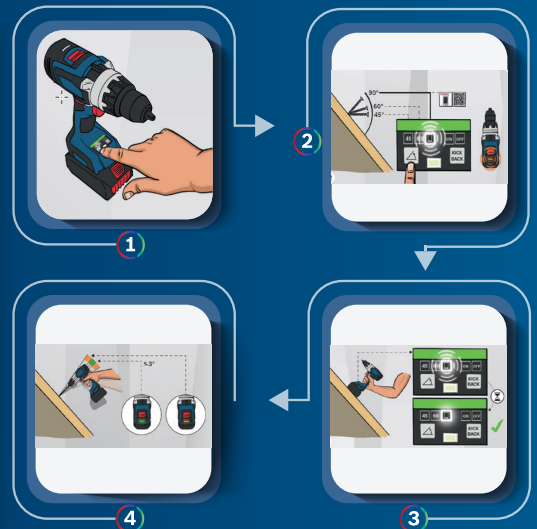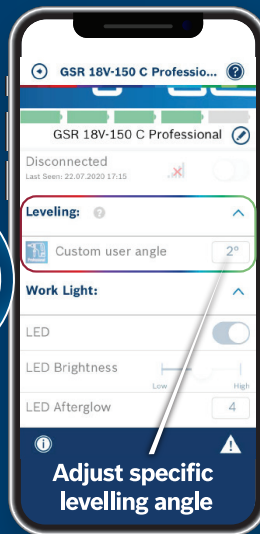


Personalized Speed Levels





GCM 18V-305 GDC



Default Setting



Personalized Setting

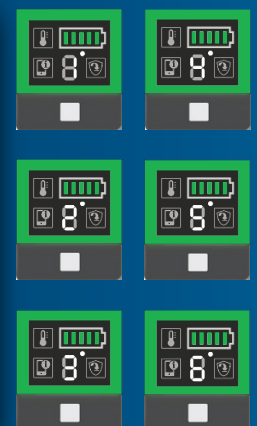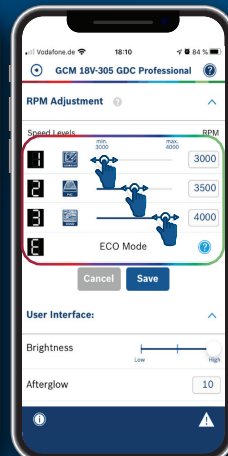

GBH 18V-40 C Solo** (0 611 917 080)

Cordless freedom with corded performance

HEAVY DUTY

NEW!

WHY THIS

- 01** Corded performance
- 02** Optimal power-to-weight ratio
- 03** Minimized hand and arm injuries

Corded Performance USP

BITURBO Brushless technology with ProCORE18V for corded performance providing powerful 9.0 J impact energy



Perfect Tool Control USP

- User Interface for real-time tool status
- Working mode choice via User Interface
- Bluetooth connectivity for personalization via App*
 - Soft start ASC & EPC
 - Lock-on button for continuous operation in chisel mode
- Signal switch for variable rotation speed
- Focused LED working light for improved visibility
- Vibration Control



Minimized Hand and Arm Injuries USP

Kickback Control senses sudden loss of tool control. In case of e.g. a canted drill it instantly shuts the cordless rotary hammer down in order to minimize hand and arm injuries



Optimal Power-to-Weight Ratio USP

An improved impact mechanism and highly capable drive train lead to an optimal power-to-weight ratio

*Bluetooth module is included in AP execution, not in LA and EE execution

TARGET USERS

- HVAC & Plumber
- Electricians
- Concrete Core Construction (General Construction)



580 pts

| GBH 18V-40 C Solo** | Unit | Specifications |
|----------------------------------|------|----------------|
| Impact energy | J | 9.0 |
| Drilling diameter | mm | 12 - 40 |
| Impact rate drilling / chiseling | bpm | 0 - 3,130 |
| Rated tool Speed | pm | 0 - 360 |
| Weight w/o battery | kg | 7.0 |

18 V BITURBO BRUSHLESS

BITURBO BRUSHLESS

GDS 18V-1000 (1/2") Solo** Cordless Impact Wrench (0 601 9J8 3L1)

HEAVY DUTY



130 pts



| Capacity | |
|-----------------------|---------------------------|
| Battery Voltage | : 18 V |
| No-Load Speed | : 0-800/1,200/1,750 rpm |
| Max tightening torque | : 1,000 Nm |
| Max.Breakaway Torque | : 1,600 Nm |
| Impact Rate | : 0-1,600/2,400/2,600 bpm |
| Torque | : 0-350/700/1,000 Nm |
| Weight w/o battery | : 2.9 kg |

GDS 18V-1050 H (3/4") Solo** Cordless Impact Wrench (0 601 9J8 5L1)

HEAVY DUTY



130 pts



| Capacity | |
|----------------------|--------------------|
| Battery Voltage | : 18 V |
| No-Load Speed | : 0 - 1,750 rpm |
| Max.Torque | |
| (1st/2nd/3rd level) | : 350/750/1,050 Nm |
| Max.Breakaway Torque | : 1,700 Nm |
| Impact Rate | : 0 - 2,600 bpm |

GSR 18V-150C Solo** Cordless Drill/Driver (0 601 9J5 0L0)

HEAVY DUTY



140 pts

| Capacity | |
|-------------------------|-----------------|
| Battery Voltage | : 18 V |
| Torque (soft/hard/max.) | : 84/100/150Nm |
| No-load speed(1st gear) | : 0 - 550 rpm |
| (2nd gear) | : 0 - 2,200 rpm |
| Weight excl. battery | : 2.1 kg |
| Chuck capacity min/max: | : 1.5 / 13 mm |
| Torque settings | : 25 + 1 |

GSB 18V-150C Solo** Cordless Combi (0 601 9J5 1L0)

HEAVY DUTY



150 pts



| Capacity | |
|-------------------------|-----------------|
| Battery Voltage | : 18 V |
| Torque (soft/hard/max.) | : 84/100/150Nm |
| No-load speed(1st gear) | : 0 - 550 rpm |
| (2nd gear) | : 0 - 2,200 rpm |
| Weight excl. battery | : 2.2 kg |
| Chuck capacity min/max: | : 1.5 / 13 mm |
| Torque settings | : 25 + 2 |

GBH 18V-34 CF Solo** Cordless Rotary Hammer (0 611 914 082)

HEAVY DUTY



360 pts



| Capacity | |
|----------------------------|---------------|
| Battery Voltage | : 18 V |
| Equivalent to corded power | : 950 W |
| Max. impact energy | : 5.8 J |
| No-load speed | : 0 - 500 rpm |
| Impact rate | : 2,900 bpm |
| Weight with battery | : 5.9 kg |

GBH 18V-36 C Solo** Cordless Rotary Hammer (0 611 915 082)

HEAVY DUTY



400 pts



| Capacity | |
|----------------------------|---------------|
| Battery Voltage | : 18 V |
| Equivalent to corded power | : 1,000 W |
| Max. impact energy | : 7.0 J |
| No-load speed | : 0 - 500 rpm |
| Impact rate | : 2,900 bpm |
| Weight with battery | : 6.1 kg |

GBH 18V-45 C Solo** Cordless Rotary Hammer (0 611 913 080)

HEAVY DUTY



670 pts




| Capacity | |
|------------------------|---------------|
| Battery Voltage | : 18 W |
| Single impact energy | : 12.5 J |
| Impact rate drilling | : 2,720 bpm |
| Impact rate chiselling | : 2,760 bpm |
| Drilling diameter | : 12-45 mm |
| Rated Toll Speed | : 0 - 305 rpm |
| Weight with battery | : 9.3 kg |

GKS 18V-68 GC Solo** Cordless Circular Saw (0 601 6B5 180)

HEAVY DUTY



240 pts



| Capacity | |
|------------------------|---------------------|
| Battery Voltage | : 18 V |
| Battery | : ProCORE18V 8.0* |
| SB Diameter / | : 190 mm |
| Bore Size | : 20 mm |
| Cutting Capacity (90°) | : 68 mm |
| (45°) | : 50 mm |
| Bevel Capacity | : 0 - 50° |
| No-load Speed | : 2,500 - 5,000 rpm |

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

GTS 18V-216 Solo**
Cordless Table Saw
(0 601 B44 0K0)

HEAVY DUTY



380 pts

| Capacity | |
|----------------------|----------------|
| Battery Voltage | : 18 V |
| Saw blade diameter | : 216 mm |
| Bore hole diameter | : 30 mm |
| Base blade thickness | : 2.0 / 1.4 mm |
| No-load Speed | : 4,500 rpm |
| Weight with battery | : 21.6 kg |
| Cutting height | : 70 mm |
| Cutting capacity | : 635mm |

GCM 18V-216 D Solo**
Cordless Mitre Saw
(0 601 B51 080)

HEAVY DUTY



310 pts

| Capacity | |
|---------------------------------|-------------|
| Battery Voltage | : 18 V |
| No-load speed | : 5,000 rpm |
| Saw Blade diameter | : 216 mm |
| Saw Blade Teeth | : 24 mm |
| Cutting dept 0° Miter/0° Bevel: | 66x305 mm |
| Miter Setting | : 48° / 48° |
| Bevel Setting | : 47° / 47° |
| Weight | : 12.5 kg |

GCM 18V-254 D Solo**
Cordless Mitre Saw
(0 601 B51 180)

HEAVY DUTY



420 pts

| Capacity | |
|---------------------------------|-------------|
| Battery Voltage | : 18 V |
| No-load speed | : 4,500 rpm |
| Saw Blade diameter | : 254 mm |
| Saw Blade Teeth | : 40 mm |
| Cutting dept 0° Miter/0° Bevel: | 90x305 mm |
| Miter Setting (L/R) | : 52° / 60° |
| Bevel Setting (L/R) | : 47° / 47° |
| Weight | : 17.0 kg |

GCM 18V-305 GDC Solo**
Cordless Mitre Saw
(0 601 B43 0K0)

HEAVY DUTY



680 pts

| Capacity | |
|----------------------|---------------------|
| Battery Voltage | : 18 V |
| Max. Cutting Dept | : 120 mm |
| Width | : 400 mm |
| Equivalent to | : 2,000 W |
| Disc diameter | : 305mm |
| No-load speed | : 2,550 - 4,000 rpm |
| Weight incl. battery | : 27.8 kg |

GWS 18V-15 SC (100mm) Solo**
Cordless Angle Grinder
(0 601 9H6 1B2)

HEAVY DUTY




170 pts

| Capacity | |
|----------------------------|-------------|
| Battery Voltage | : 18 V |
| Equivalent to cored power: | 1,500 W |
| Disc diameter | : 100 mm |
| No-load speed | : 9,800 rpm |
| Weight w/o battery | : 2.3 kg |

GWS 18V-15 SC (125mm) Solo**
Cordless Angle Grinder
(0 601 9H6 100)

HEAVY DUTY



170 pts

| Capacity | |
|----------------------------|--------------------|
| Battery Voltage | : 18 V |
| Equivalent to cored power: | 1,500 W |
| Disc diameter | : 125 mm |
| No-load speed | : 3,400 - 9,800rpm |
| Weight w/o battery | : 2.3 kg |

GWS 18V-15 SC (150mm) Solo**
Cordless Angle Grinder
(0 601 9H6 300)

HEAVY DUTY



170 pts

| Capacity | |
|----------------------------|---------------------|
| Battery Voltage | : 18 V |
| Equivalent to cored power: | 1,500 W |
| Disc diameter | : 150 mm |
| No-load speed | : 2,600 - 7,400 rpm |
| Weight w/o battery | : 2.3 kg |

GWS 18V-15 PSC Solo**
Cordless Angle Grinder
(0 601 9H6 B00)

HEAVY DUTY



190 pts

| Capacity | |
|----------------------------|---------------------|
| Battery Voltage | : 18 V |
| Equivalent to cored power: | 1,500 W |
| Disc diameter | : 125 mm |
| No-load speed | : 3,400 - 9,800 rpm |
| Weight w/o battery | : 2.3 kg |

GWS 18V-180 PC Solo**
Cordless Angle Grinder
(0 601 9H6 E01)

HEAVY DUTY



190 pts

| Capacity | |
|-----------------------------------|-------------|
| Battery Voltage | : 18 V |
| Equivalent to cored input power: | 1,500 W |
| Equivalent to cored output power: | 1,130 W |
| Disc Size | : 180 mm |
| Spindle | : M14 |
| No-load Speed | : 7,000 rpm |
| Weight w/o battery | : 2.8 kg |
| Cutting Depth | : 61 mm |
| Grip Circumference | : 156 |

GCY 42 Professional
(1 600 A01 L2W)

HEAVY DUTY




| Capacity | |
|--------------|---------|
| Reach | : 30 m |
| Output power | : <1 mW |

Guide Rail

Guiderrail compatible with GKS 18V-68 GC



FSN 1100
(1 600 Z00 006)



FSN 1600
(1 600 Z00 00F)



FSN 2100
(1 600 Z00 007)

FSN KK (plastic cover)
(1 600 Z00 00C)



FSN KZW (clamps)
(1 600 A00 1F8)



FSN RS (kickback stop)
(1 600 Z00 00M)



12 V Li-Ion Bosch Professional

GSR 120-LI GEN 2
Cordless Drill / Driver
(0 601 9G8 0L0)



50 pts

| Capacity | |
|----------------------|---------------------------|
| Battery Voltage | : 12 / 2.0 Ah |
| Torque (Hard / Soft) | : 30 / 14 Nm |
| No-load Speed | : 0 - 400 / 0 - 1,500 rpm |
| Drilling | |
| - in Wood | : 20 mm |
| - in Metal | : 10 mm |
| Weight | : 0.97 kg |

GSB 120-LI GEN 2
Cordless Combi
(0 601 9G8 1L0)



50 pts

| Capacity | |
|----------------------|---------------------------|
| Battery Voltage | : 12 / 2.0 Ah |
| Torque (Hard / Soft) | : 30 / 14 Nm |
| No-load Speed | : 0 - 400 / 0 - 1,500 rpm |
| Drilling | |
| - in Wood | : 20 mm |
| - in Metal | : 10 mm |
| - in Masonry | : 8 mm |
| Weight | : 1.06 kg |

GDR 120 LI
Cordless Impact Driver
(0 601 9F0 0L6)



60 pts

| Capacity | |
|------------------|-------------------------|
| Battery Voltage | : 12 V / 2.0 Ah |
| Max. Torque Hard | : 100 Nm |
| No-load Speed | : 0 - 1,300 / 2,600 rpm |
| Impact Rate | : 0 -1900/3200 bpm |
| Max Screw Dia. | : 8 mm |
| Bit Holder | : 1/4" |
| Charging Time | : 90 mins |
| Weight | : 1.05 kg |

Pro Pruner
Cordless Secateur
(0 601 9K1 0L1)



110 pts

| Capacity | |
|------------------------|----------|
| Battery Voltage | : 12 V |
| Battery Capacity | : 3.0 Ah |
| Max. Cutting Diameter | : 25 mm |
| Weight with | : 1.0 kg |
| 12 V / 3.0AH Battery | |
| No. of Cuts per Charge | : 4,500 |

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

18V Cordless

12 V Li-Ion Bosch Heavy Duty

GSR 12V-30
Cordless Drill / Driver
(0 601 9G9 0L1)

HEAVY DUTY



80 pts



| Capacity | |
|-------------------------|-----------------------|
| Battery Voltage | : 12 V / 2.0 Ah |
| Drilling Dia.: In Steel | : 10 mm |
| In Wood | : 20 mm |
| Max. Torque (hard/soft) | : 30 / 18 Nm |
| No-load speed | : 0 - 420 / 1,600 rpm |
| Weight | : 0.82 kg |

GSB 12V-30
Cordless Impact Drill Driver
(0 601 9G9 1L1)

HEAVY DUTY



90 pts



| Capacity | |
|-------------------------|-----------------------|
| Battery Voltage | : 12 V / 2.0 Ah |
| Drilling Dia.: In Steel | : 10mm |
| In Wood | : 20 mm |
| In Masonry | : 8mm |
| Max. Torque (hard/soft) | : 30 / 18 Nm |
| No-load speed | : 0 - 420 / 1,600 rpm |
| Weight | : 0.82 kg |

GDR 12V-EC
Cordless Impact Driver
(0 601 9E0 0L2)

HEAVY DUTY



100 pts



| Capacity | |
|--------------------|-------------------------|
| Battery Voltage | : 12 V / 2.0 Ah |
| Tool Holder System | : 1/4" Hex (6.35 mm) |
| No-load Speed | : 0 - 1,200 / 2,600 rpm |
| Impact Rate | : 0 - 2,700 / 3,100 bpm |
| Max. Torque | : 110 Nm |
| Weight | : 0.95 kg |

GSR 12V-15 FC
Cordless Screw / Drill Driver
(0 601 9F6 0L0)

HEAVY DUTY



110 pts

| Capacity | |
|-------------------------|-----------------------|
| Battery Voltage | : 12 V / 2.0 Ah |
| Drilling Dia.: In Steel | : 10 mm |
| In Wood | : 19 mm |
| Max. Torque (hard/soft) | : 30 / 15 Nm |
| No-load Speed | : 0 - 400 / 1,300 rpm |
| Chuck Capacity | : 10 mm |
| Charging Time | : 45 mins |
| Charger | : AL 1230 CV |
| Weight | : 0.6 kg (tool only) |

18V BITURBO

12V Cordless

GWS 12V-76 Solo**
Cordless Angle Grinder
(0 601 9F2 000)

HEAVY DUTY



60 pts



| Capacity | |
|-------------------------|--------------|
| No-load Speed | : 19,500 rpm |
| Grinding Spindle Thread | : M5 |
| Bore Size, Diameter | : 10 mm |
| Weight | : 0.9 kg |

GOP 12V-28 Solo**
Cordless Multi-Cutter
(0 601 8B5 0L0)

HEAVY DUTY



70 pts



| Capacity | |
|-------------------|----------------------|
| Oscillation Angle | on Left / Right |
| Stroke Length | : 1.4° |
| No-load Speed | : 5,000 - 20,000 rpm |
| Weight | : 0.81 kg |

GRO 12V-35 Solo**
Cordless Rotary Tool
(0 601 9C5 0K1)

HEAVY DUTY



40 pts

| Capacity | |
|----------------------|----------------------|
| Battery Voltage | : 12 V |
| Max. Collet Diameter | : 3.2mm |
| No-load speed | : 5,000 / 32,000 rpm |
| Weight | : 0.62 kg |

GAS 12V-LI Solo**
Cordless Vacuum Cleaner
(0 601 9E3 081)

HEAVY DUTY



30 pts

| Capacity | |
|-----------------------|------------|
| Battery Voltage | : 12 V |
| Container Volume | : 0.35 l |
| Filter Surface | : 408 cm² |
| Max. Volume Flow Rate | : 15 l/sec |
| Max. Volume Pressure | : 45 mbar |
| Weight | : 0.9 kg |

Battery, Charger, L-BOXX, Trolley, Roller

Drill, Impact Drill, Multi-Cutter, Foam Cutter, Mixer Drill,

Straight Grinder, Angle Grinder, Bench Grinder,

Diamond Cutter, Reciprocating Saw, Shear, Nibbler

Jigsaw, Circular Saw

Cut Off Machine, Mitre Saw, Table Saw

Planer, Sander, Router, Hot Air Gun, Blower, Vacuum

Rotary Hammer, Demolition Hammer

GSA 12V-LI Solo**
Cordless Sabre Saw
(0 601 64L 9L2)

HEAVY DUTY



60 pts

| Capacity | |
|------------------------|-----------------|
| Battery Voltage | : 12 V |
| Stroke speed | : 0 - 3,000 spm |
| Stroke Length | : 14.5 mm |
| Cutting depth in metal | : 50 mm |
| profiles & metal pipes | |
| Wood | : 65 mm |

GST 12V-LI Solo**
Cordless Jigsaw
(0 601 5A1 0L1)

HEAVY DUTY



60 pts

| Capacity | |
|----------------------|---------------------|
| Battery Voltage | : 12 V |
| No-load Stroke Rate | : 1,500 - 2,800 spm |
| Stroke Length | : 18 mm |
| Cutting Capacity | |
| - in Wood | : 70 mm |
| - in Aluminium | : 3 mm |
| - in Non-alloy Steel | : 3 mm |
| Weight | : 1.5 kg |

GKF 12V-8 Solo**
Cordless Palm Router
(0 601 6B0 0L0)

HEAVY DUTY



100 pts



| Capacity | |
|------------------|-----------------------------|
| Battery Voltage | : 12 V |
| Collect Size | : 8 (UNI), 6 & 1/4 (RAP) mm |
| No-load rotation | : 13,000 min ⁻¹ |
| Weight | : 1.1 kg |

GKS 12V-LI Solo**
Cordless Circular Saw
(0 601 6A1 0L2)

HEAVY DUTY



70 pts

| Capacity | |
|--------------------|-------------|
| Battery Voltage | : 12 V |
| No-load Speed | : 1,400 rpm |
| Depth of Cut - 90° | : 26.5 mm |
| Bore Diameter | : 15 mm |
| Max. Bevel | : 45° |
| Weight | : 1.4 kg |

GHO 12V-20 Solo**
Cordless Planer
(0 601 5A7 0K0)

HEAVY DUTY



120 pts



| Capacity | |
|-------------------------|--------------------|
| Battery Voltage | : 12 V |
| No-load Rotation | : 14,500 rpm |
| Planing Depth (optimal) | : 0 - 1.0 (2.0) mm |
| Planing width max | : 40 mm |
| Weight w/o Battery | : 1.5 kg |

GLI 12V-330 Solo**
Cordless Torch
(0 601 4A0 000)

HEAVY DUTY



30 pts

| Capacity | |
|----------------------|-----------|
| Battery Voltage | : 12 V |
| Runtime | : 6 h |
| Brightness | : 330 lmn |
| Brightness (1m Dis.) | : 350 lux |
| Weight | : 0.3 kg |

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (P) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

12 V Li-Ion Battery Pack



GBA 12V 2.0 Ah
(1 600 A00 F6X)



GBA 12V 4.0 Ah
(1 600 A00 F71)



GBA 12V 6.0 Ah
(1 600 A00 X7H)

18 V Li-Ion Battery Pack



COOLPACK
GBA 18V 2.0 Ah
(1 600 A00 1CG)



COOLPACK
GBA 18V 4.0 Ah
(1 600 A00 163)

ProCORE 18V Battery Pack



COOLPACK
ProCORE 18V 4.0 Ah
(1 600 A01 93L)



COOLPACK
ProCORE 18V 8.0 Ah
(1 600 A01 93N)



COOLPACK
ProCORE 18V 12.0 Ah
(1 600 A01 93R)

Charger - 12V



GAL 12V-20
(for 10.8 V &
12 V Battery)
(1 600 A02 1KG)



GAL 12V-40
(for 10.8 V &
12 V Battery)
(1 600 A01 B8Z)

Charger - 18V



GAL 18V-20 CV
(for 18 V Battery)
(1 600 A02 1KV)



GAL 18V-40 CV
(for 14.4 V &
18 V Battery)
(1 600 A01 B92)



GAL 1880 CV
(for 14.4 V &
18 V Battery)
(1 600 A00 B8H)



GAL 18V-160 C
(for 18 V Battery)
(1 600 A01 9S7)



GAL 18V6-80
(For 14.4-18V)
(1600A01U9M)

Starter Kit



12V 2.0 Ah (2 Batteries)
+ GAL 12 V-40 (1 Charger)
(1 600 A01 B8Y)



18V 2.0 Ah (2 Batteries)
+ GAL 18V-40 CV (1 Charger)
(1 600 A01 B91)



18V 4.0 Ah (2 Batteries)
+ GAL 18V-40CV (1 Charger)
(1 600 A01 9S1)

ProCORE 18 V Starter Kit



ProCORE starter kit
18V 4.0 Ah (2 Batteries)
+ GAL 1880 CV (1 Charger)
(1 600 A01 6GG)



ProCORE starter kit
18V 8.0 Ah (2 Batteries)
+ GAL 18V-160 C (1 Charger)
(1 600 A01 6GR)



ProCORE starter kit
18V 12.0 Ah (2 Batteries)
+ GAL 18V-160 C (1 Charger)
(1 600 A01 6GZ)

L-BOXX



L-BOXX 102
(1 600 A01 2FZ)



L-BOXX 136
(1 600 A01 2G0)



L-BOXX 238
(1 600 A01 2G2)



L-BOXX 374 (Indent)
(1 600 A01 2G3)

Trolley / Roller

L-BOXX Trolley
(1 600 A00 1SA)



L-BOXX Roller
(1 600 A00 1S9)



More power

ProCORE18V:
latest cell technology
and intelligent battery
management.



+87%
more
power*

Power Boost Mode:
get back to work
faster than ever.



9 min.
to 50%²

Longer lifetime

COOLPACK 2.0
technology:
prevents the battery
from overheating.



Up to
135%
longer
lifetime³
















GBA 18V 6.0Ah vs. ProCORE18V 8.0Ah: 860 W vs. 1620 W.

²To reach 50% charge of the ProCORE18V 4.0Ah (in Power Boost Mode). As of May 2019.

³Vs. no Bosch COOLPACK 2.0 technology.

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (P) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

Charging Time For Battery Capacity (Minute)

| | | 12 V Charger | | | 18 V Charger | | | | | | | | | |
|---|--|---|--|--|--|--|-------------|-----------|------------|------------|--|--|--|--|
|  | GAL 12V-20  | GAL 12V-40 (1 600 A01 B8Z)  | GAL 18V-20 CV (1 600 A02 1KV)  | GAL 18V-40 CV (1 600 A01 B9Z)  | GAL 1880 CV (1 600 A00 B8H)  | GAL 18V-160 C (1 600 A01 957)  | | | | | | | | |
| | | | | | | | 12 V | | | | | | | |
| | | | | | | | | | | | | | | |
| 18 V | 2.0 Ah (1 600 A00 F6X)  | 35 | 65 | 65 | 40 | 15 | - | 25 | 50 | | | | | |
| | 4.0 Ah (1 600 A00 F71)  | 65 | 95 | 125 | 60 | 35 | 50 | 65 | 90 | | | | | |
| | 6.0 Ah (1 600 A00 X7H)  | 185 | | | | | | | | | | | | |
| ProCORE 18 V | 2.0 Ah (1 600 A00 1CG)  | | | 65 | 125 | 50 | - | 25 | 50 | | | | | |
| | 4.0 Ah (1 600 A00 163)  | | | | | | - | 60 | 90 | | | | | |
| | 4.0 Ah (1 600 A01 93L)  | | | | | | | - | 50 | 100 | | | | |
| | 8.0 Ah (1 600 A01 93N)  | | | | | | - | 65 | 135 | | | | | |
| | 12.0 Ah (1 600 A01 93F)  | | | | | | - | 90 | 180 | | | | | |

* Above data is based on approximate charging time

GBM 400 (0 601 1C1 0L0)

Powerful, compact and keyless

Slim and Compact SP
To work with more flexibility in narrow space

10 mm Keyless Chuck
Convenience from fast accessory change

High Precision
Max. concentricity of 0.4 mm to work confidently with delicate applications

Reduced Noise SP
Less noise thanks to enhanced gear housing

Better User Experience SP
Optimized air-flow design avoids overheating and improves comfort

Forward / Reverse
Easy slide switch

High Performance SP
Upgraded 400 W motor to help job done efficiently

Increased Durability SP
Optimized carbon brush holder structure and new gear design bring longer lifetime

Excellent Ergonomics
New industrial design for one hand "in-line" use and effortless drilling

Lock-on Button
Continuous drilling with trigger lock

Electronic Variable Speed Switch
Smooth speed control

| GBM 400 | Unit | Specifications |
|-------------------------|------|----------------|
| Rated power | W | 400 |
| No-load speed | rpm | 0 -2,800 |
| Chuck type | - | Keyless |
| Length x height x width | mm | 240 x 195 x 65 |
| Chuck capacity | mm | 10 |
| Steel drilling | mm | 10 |
| Aluminum drilling | mm | 13 |
| Wood drilling | mm | 20 |
| Weight | kg | 1.3 |

Drill

GBM 320 (0 601 1A4 5L0)

HEAVY DUTY

1 619 PA4 619

20 pts

| Capacity | |
|---------------|-------------|
| Power Input | : 320 W |
| In Steel | : 6.5 mm |
| In Aluminium | : 13 mm |
| In Wood | : 13 mm |
| No-load Speed | : 4,200 rpm |
| Weight | : 1.0 kg |

GBM 10 RE (0 601 473 5L0)

HEAVY DUTY

2 610 391 290

40 pts

| Capacity | |
|---------------|-----------------|
| Power Input | : 450 W |
| In Steel | : 10 mm |
| In Aluminium | : 10 mm |
| In Wood | : 25 mm |
| No-load Speed | : 0 - 2,600 rpm |
| Weight | : 1.3 kg |

GBM 13 RE (0 601 477 5L0)

HEAVY DUTY

2 610 391 290

50 pts

| Capacity | |
|---------------|-----------------|
| Power Input | : 600 W |
| In Steel | : 13 mm |
| In Aluminium | : 13 mm |
| In Wood | : 30 mm |
| No-load Speed | : 0 - 2,600 rpm |
| Weight | : 1.70 kg |

GBM 13 HRE (0 601 049 603)

HEAVY DUTY

1 607 031 222

105 pts

| Capacity | |
|------------------|---------------|
| Power Input | : 550 W |
| In Steel | : 13 mm |
| In Aluminium | : 20 mm |
| In Wood | : 40 mm |
| No-load Speed | : 0 - 550 rpm |
| Torque (Approx.) | : 40 Nm |
| Weight | : 2.1 kg |

Impact Drill

GBM 50-2 (0 601 1B4 0L0)

HEAVY DUTY

720 pts

| Capacity | |
|------------------|------------------------|
| Power | : 1,200 W |
| No-load Speed | : 50-255 / 100-510 rpm |
| Annular Cutter | : Ø50 mm |
| Max. Twist Drill | : Ø23 mm |
| Max Thread | : M16 |
| Magnetic Force | : 14,000 N |
| Weight | : 14.7 kg |

GSB 10 RE (0 601 216 1L6)

HEAVY DUTY

2 610 391 290

40 pts

| Capacity | |
|---------------|-----------------|
| Power Input | : 500 W |
| In Masonry | : 10 mm |
| In Steel | : 8 mm |
| In Wood | : 20 mm |
| No-load Speed | : 0 - 2,600 rpm |
| Weight | : 1.5 kg |

GSB 16 RE (0 601 228 1L2)

HEAVY DUTY

2 610 391 290

60 pts

| Capacity | |
|----------------|------------------|
| Power Input | : 750 W |
| In Concrete | : 16 mm |
| In Steel | : 12 mm |
| In Wood (hard) | : 25 mm |
| No-load Speed | : 0 - 3,250 rpm |
| Impact Rate | : 0 - 48,500 bpm |
| Weight | : 1.8 kg |

GSB 20-2 RE (0 601 1A2 1L0)

HEAVY DUTY

1 617 000 525

90 pts

| Capacity | |
|---------------|---------------------------|
| Power Input | : 800 W |
| In Concrete | : 20 mm |
| In Steel | : 13 mm |
| In Wood | : 40 mm |
| No-load Speed | : 0 - 1,100 / 3,000 rpm |
| Impact Rate | : 0 - 16,000 / 48,000 bpm |
| Weight | : 2.6 kg |

GSB 600 (0 601 1A0 3L0)

HEAVY DUTY

20 pts

| Capacity | |
|------------------|------------------|
| Rated Power | : 600 W |
| No-load Speed | : 0 - 3,000 rpm |
| Impact Rate | : 0 - 48,000 bpm |
| Chuck Capacity | : 13 mm |
| Metal Drilling | : 10 mm |
| Masonry Drilling | : 13 mm |
| Wood Drilling | : 25 mm |
| Weight | : 1.7 kg |

GOP 30-28 (0 601 237 0L0)

HEAVY DUTY

1 619 P02 870

90 pts

| Capacity | |
|-----------------------|----------------------|
| Power Input | : 300W |
| Oscillating amplitude | : 2.8° (2 x 1.4°) |
| No-load Speed | : 8,000 - 20,000 opm |
| Weight | : 1.5 kg |

GSG 300 (0 601 575 103)

HEAVY DUTY

2 604 320 911

300 pts

| Capacity | |
|---------------------|-------------|
| Power Input | : 350 W |
| Cutting Capacity | : 300 mm |
| No-load Stroke Rate | : 3,500 spm |
| Weight | : 1.6 kg |

GRW 12 E (0 601 1A7 070)

HEAVY DUTY

1 607 014 17A

240 pts

| Capacity | |
|----------------|-----------------------------|
| Power Input | : 1,200 W |
| Connector Type | : M14 Inside Thread |
| Max. Paddle Ø | : 140 mm |
| Incl. Paddle Ø | : 140 mm |
| No-load Speed | : 0 - 1,000 rpm |
| Nominal speed | : 0 - 620 min ⁻¹ |
| Weight | : 5.3 kg |

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (P) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

18V Cordless
18V BITURBO
12V Cordless
Battery, Charger, L-BOXX, Trolley, Roller
Drill, Impact Drill, Multi Cutter, Foam Cutter, Mixer Drill,
Straight Grinder, Angle Grinder, Bench Grinder
Diamond Cutter, Reciprocating Saw, Shear, Nibbler
Jigsaw, Circular Saw
Cut Off Machine, Miter Saw, Table Saw
Planes, Sanders, Polisher, Hot Air Gun, Roller, Use Gun, Blower, Vacuum
Rotary Hammer, Demolition Hammer

GWS 700 (0 601 3A3 1L0)

Comfort with performance - an ideal grinder for your daily work



WHY THIS

- 01 High Performance**
Powerful motor with outstanding overload capacity
- 02 Long Lifetime**
Reliable structure design and qualified components to ensure the tool fulfill Bosch quality requirement
- 03 Ease of Use**
Light weight and compact housing design

High Removal Rate ^{USP}

Powerful motor with outstanding overload capability

Better Motor Cooling For Uninterrupted Longer Work

With double air inlets for additional air flow

Long Gear Lifetime

Thanks to the robust metal flange

Reliable Performance & Lifetime ^{SP}

Simple yet reliable design

Comfortable Handling and Easy Control ^{USP}

Compact & slim grip Ergonomic palm-fit round design



TARGET USERS

- Metal workshops
- General construction
- Metal fabricators
- Renovating
- Wall chasing

20 pts



| GWS 700 | Unit | Specifications |
|---------------|------|----------------|
| Voltage | V | 220 - 240 |
| Power | W | 710 |
| No-load Speed | rpm | 12,000 |
| Disc Diameter | mm | 100 |
| Grip Size | mm | 185 |
| Spindle | - | M10 |
| Weight | kg | 1.6 |

Straight Grinder

GGS 5000 L
(0 601 224 1L0)



1 607 031 223 **90 pts**

| Capacity | |
|----------------------|--------------|
| Power Input | : 500 W |
| Max. Collet Capacity | : 8 mm |
| No-load Speed | : 33,000 rpm |
| Weight | : 1.4 kg |

GGS 28 LC
(0 601 221 070)

HEAVY DUTY



KICK BACK STOP
ELECTRONIC
1 607 014 176 **130 pts**

| Capacity | |
|----------------------|--------------|
| Power Input | : 650 W |
| Max. Collet Diameter | : 8 mm |
| No-load Speed | : 28,000 rpm |
| Weight | : 1.6 kg |

GGS 28 C
(0 601 220 070)

HEAVY DUTY



KICK BACK STOP
ELECTRONIC
1 607 014 176 **90 pts**

| Capacity | |
|----------------------|--------------|
| Power Input | : 650 W |
| Max. Collet Diameter | : 8 mm |
| No-load Speed | : 30,000 rpm |
| Weight | : 1.4 kg |

4" Angle Grinder

GWS 750-100
(0 601 394 0L0)

HEAVY DUTY



1 619 P11 715 **30 pts**

| Capacity | |
|---------------|----------------|
| Power Input | : 750 W |
| No-load Speed | : 11,000 rpm |
| Disc Diameter | : 100 mm |
| Grip Size | : 59 / 54.5 mm |
| Perimeter | : 187 mm |
| Weight | : 1.8 kg |

GWS 7-100 ET
(0 601 388 5L0)

HEAVY DUTY



1 619 P02 870 **40 pts**

| Capacity | |
|-------------------------|---------------------|
| Power Input | : 720 W |
| Grinding / Cutting | |
| Disc Diameter | : 100 mm |
| Wire Cup Brush Diameter | : 70 mm |
| No-load Speed | : 2,800 - 9,300 rpm |
| Weight | : 1.8 kg |

GWS 900-100
(0 601 396 0L0)

HEAVY DUTY



1 619 P11 715 **50 pts**

| Capacity | |
|--------------------|--------------|
| Power Input | : 900 W |
| Grinding / Cutting | |
| Disc Diameter | : 100 mm |
| Spindle Thread | : M10 |
| No-load Speed | : 11,000 rpm |
| Weight | : 1.9 kg |

GWS 900-100 S
(0 601 396 1L0)

HEAVY DUTY



1 619 P11 715 **50 pts**

| Capacity | |
|--------------------|----------------------|
| Power Input | : 900 W |
| Grinding / Cutting | |
| Disc Diameter | : 100 mm |
| Spindle Thread | : M10 |
| No-load Speed | : 2,800 - 11,000 rpm |
| Weight | : 1.9 kg |

GWS 9-100 P
(0 601 396 5L0)

HEAVY DUTY



1 619 P11 715 **40 pts**

| Capacity | |
|----------------|--------------|
| Power Input | : 900 W |
| Disc Diameter | : 100 mm |
| Spindle Thread | : M10 |
| No-load Speed | : 11,000 rpm |
| Weight | : 1.9 kg |

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

5" Angle Grinder

GWS 12-125 S
(0 601 3A6 0P0)

HEAVY DUTY



60 pts

Capacity

| | |
|---------------|---------------------------------------|
| Input Power | : 1,200 w |
| No-load Speed | : 2,800 - 11,000 / 2,800 - 10,000 rpm |
| Disc Diameter | : 125 mm |
| Spindl size | : M14 |
| EPTA Weight | : 2.2 kg |



GWS 17-125 CI
(0 601 79G 002)

HEAVY DUTY



1607 000 V37 90 pts

Capacity

| | |
|----------------|--------------|
| Power Input | : 1,700 W |
| No-load Speed | : 11,500 rpm |
| Spindle Thread | : M14 |
| Disc Diameter | : 125 mm |
| Weight | : 2.4 kg |

GWS 18-125 L (Indent)
(0 601 7A3 0L0)

HEAVY DUTY



1607 000 V37 90 pts

Capacity

| | |
|----------------|--------------|
| Power Input | : 1,800 W |
| No-load Speed | : 12,000 rpm |
| Spindle Thread | : M14 |
| Disc Diameter | : 125 mm |
| Weight | : 2.5 kg |

6" Angle Grinder

GWS 17-150 CI
(0 601 79K 002)

HEAVY DUTY



1 607 000 V37 100 pts

Capacity

| | |
|----------------|-------------|
| Power Input | : 1,700 W |
| No-load Speed | : 9,300 rpm |
| Spindle Thread | : M14 |
| Disc Diameter | : 150 mm |
| Weight | : 2.4 kg |

7" Angle Grinder

GWS 2200-180
(0 601 8C0 0L0)



80 pts

Capacity

| | |
|----------------|-------------|
| Power Input | : 2,200 W |
| No-load Speed | : 8,500 rpm |
| Spindle Thread | : M14 |
| Disc Diameter | : 180 mm |
| Main Handle | : Barrel |
| Weight | : 5.2 kg |

GWS 24-180 JZ
(0 601 8C2 3L0)

HEAVY DUTY



90 pts

Capacity

| | |
|----------------|-------------|
| Power Input | : 2,400 W |
| No-load Speed | : 8,500 rpm |
| Spindle Thread | : M14 |
| Disc Diameter | : 180 mm |
| Main Handle | : Barrel |
| Weight | : 5.8 kg |

GWS 30-180 B
(0 601 8G0 0L0)

HEAVY DUTY



200 pts

Capacity

| | |
|------------------------------|-------------|
| Rated Input Power | : 2,800 W |
| No-load speed | : 8,500 rpm |
| Disc Diameter | : 180 mm |
| Spondler Size | : M14 |
| Main handle | : Rattail |
| Rubber backing pad, diameter | : 180 mm |
| Wire cup Brush, diameter | : 100 mm |
| Weight | : 5.7 kg |
| Switch | |

9" Angle Grinder

GWS 2200-230
(0 601 8C1 0L0)



90 pts

Capacity

| | |
|----------------|-------------|
| Power Input | : 2,200 W |
| No-load Speed | : 6,500 rpm |
| Spindle Thread | : M14 |
| Disc Diameter | : 230 mm |
| Main Handle | : Barrel |
| Weight | : 5.4 kg |

GWS 24-230 JZ
(0 601 8C3 3L0)

HEAVY DUTY



110 pts

Capacity

| | |
|----------------|-------------|
| Power Input | : 2,400 W |
| No-load Speed | : 6,500 rpm |
| Spindle Thread | : M14 |
| Disc Diameter | : 230 mm |
| Main Handle | : Barrel |
| Weight | : 6 kg |

GWS 30-230 B
(0 601 8G1 0L0)

HEAVY DUTY



200 pts

Capacity

| | |
|------------------------------|-------------------|
| Rated Input Power | : 2,800 W |
| No-load speed | : 6,500 rpm |
| Disc Diameter | : 230 mm |
| Spondler Size | : M14 |
| Main handle | : Rattail |
| Rubber backing pad, diameter | : 230 mm |
| Wire cup Brush, diameter | : 100 mm |
| Weight | : 5.9 kg |
| Switch | : Lockable Switch |

Marble Cutter

GDC 140
(0 601 3A4 0L0)



30 pts

Capacity

| | |
|----------------------------|--------------|
| Power Input | : 1,400 W |
| No-load Speed | : 13,200 rpm |
| Max. Cutting Disc Diameter | : 115 mm |
| Max. Cutting Dept | : 35 mm |
| Weight | : 2.9 kg |

Bench Grinder

GBG 35-15
(0 601 27A 3L0)

HEAVY DUTY



60 pts

Capacity

| | |
|---------------|-------------|
| Power Input | : 350 W |
| No-load Speed | : 3,000 rpm |
| Disc Diameter | : 150 mm |
| Weight | : 10 kg |

GBG 60-20
(0 601 27A 4L0)

HEAVY DUTY



70 pts

Capacity

| | |
|---------------|-------------|
| Power Input | : 600 W |
| No-load Speed | : 3,600 rpm |
| Disc Diameter | : 200 mm |
| Weight | : 15 kg |

Reciprocating Saw

GSA 120
(0 601 6B1 0L0)



80 pts

Capacity

| | |
|---------------------------|-----------------|
| Input Power | : 1,200 W |
| Stoke Rate | : 0 - 3,000 spm |
| Stroke Length | : 29 mm |
| Max. Cutting Dept in Wood | : 220 mm |
| in Metal | : 220 mm |
| Weight | : 3.7 kg |

Nibbler

GNA 2.0
(0 601 530 103)

HEAVY DUTY



260 pts

Capacity

| | |
|---------------------|-------------|
| Power Input | : 500 W |
| Mild Steel | : 2.0 mm |
| Stainless Steel | : 1.0 mm |
| No-load Stroke Rate | : 2,400 spm |
| Weight | : 2.0 kg |

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (P) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

GAC 250 (0 601 2B6 0L0)

Effortless sanding in every direction.

NEW!

WHY THIS

01 Effortless

02 Fast & Powerful

03 Durable

Maximum Comfort All Day long

Ergonomic handle designed for comfortable all-day operation

Effortless AAC Cutting ^{USP}

Balanced tool weight distribution and downward facing guide bar to make AAC block cutting effortless

Fast Cutting Speed ^{USP}

Powerful 1,200 W motor and optimized chain speed for faster cutting

Extra Care On Users' Health

Possibility to connect dust extraction adapter*

Safety First

Lock-off button, emergency front brake and auxiliary handle to ensure safe operation

Excellent Portability

Smaller than an AAC block**, lighter than 5kg, the tool made to cut anywhere

Durable Accessories

Tungsten-carbide-tipped saw chain made to last in heavy dust application



* Adapter is a separate accessory, supplied in selected executions only ** 20 cm thick AAC blocks

TARGET USERS

• Masonry & Restoration • General Contractors



| GAC 250 | Unit | Specifications |
|---------------------------------|------|-----------------|
| Input power | W | 1,200 |
| No-load chain speed | m/s | max. 12 |
| Chain bar length | mm | 335 |
| Max. cutting capacity | mm | 250 |
| Tool weight (incl. accessories) | kg | 4.7 |
| Bare tool size (L*W*H) | | |
| (include. auxiliary handle) | mm | 310 x 210 x 210 |
| Dust extraction interface | - | Yes |

110 pts

Jigsaw

GST 700
(0 601 2A7 0L0)



40 pts

| Capacity | |
|-----------------------|---------------------|
| Power Input | : 500 W |
| Stroke Rate | : 1,450 - 3,200 spm |
| Cutting Depth in Wood | : 70 mm |
| Stroke Length | : 20 mm |
| Weight | : 2.1 kg |

GST 90 BE
(0 601 58F 0L0)

HEAVY DUTY



90 pts

| Capacity | |
|------------------------|-------------------|
| Rated power input | : 650 W |
| No-load stroke rate | : 500 - 3,100 spm |
| Stroke length | : 26 mm |
| Cutting Capacity | |
| - Wood | : 90 mm |
| - In aluminium | : 20 mm |
| - In steel (unalloyed) | : 10 mm |
| Weight | : 2.6 kg |

GST 680
(0 601 5B4 0L1)



40 pts

| Capacity | |
|---------------|-------------------|
| Power | : 500 W |
| Stroke Rate | : 800 - 3,100 spm |
| Stroke Length | : 20 mm |
| Cutting Depth | : 68 mm |
| Bevel Angle | : -45° ~ +45° |
| Weight | : 2.0 kg |

Circular Saw

GKS 600
(0 601 6A9 0L0)



60 pts

| Capacity | |
|-------------------------|--------------|
| Power Input | : 1,200 W |
| No-load Speed | : 5,200 rpm |
| Blade Bore Size | : 20 mm |
| Diameter | : 165 mm |
| Cutting depth (90°/45°) | : 55 / 37 mm |
| Weight | : 3.6 kg |

GKS 140
(0 601 6B3 0L1)



60 pts

| Capacity | |
|--------------------|-------------|
| Input Power | : 1,400 W |
| No-load Speed | : 6,200 rpm |
| Blade Bore Size | : 20 mm |
| Diameter | : 184 mm |
| Max. Cutting Depth | : 64+/- mm |
| Bevel Capacity | : 0 - 45° |

GKS 190
(0 601 623 0L9)

HEAVY DUTY



80 pts

| Capacity | |
|-------------------------|-------------|
| Power Input | : 1,400 W |
| Blade Diameter | : 184 mm |
| Max. Cutting Capacities | |
| at 90° | : 67 mm |
| at 45° | : 48 mm |
| No-load Speed | : 5,500 rpm |
| Weight | : 4.1 kg |

GKS 235 Turbo
(0 601 5A2 0L0)

HEAVY DUTY



110 pts

| Capacity | |
|-------------------------|-----------------|
| Power Input | : 2,050 W |
| Saw Blade Diameter | : 235 mm |
| Max. Cutting Capacities | |
| at 90° | : 85 mm |
| at 45° | : 65 mm |
| No-load Speed | : 0 - 5,300 rpm |
| Weight | : 7.6 kg |

Cut-off Machine

GCO 220
(0 601 B37 3L0)



70 pts

| Capacity | |
|------------------|------------------|
| Power Input | : 2,200 W |
| No-load Speed | : 3,800 rpm |
| Disc Diameter | : 355 mm |
| Cutting Capacity | |
| Square Bar | □ : 119 x 119 mm |
| Round Bar | ○ : 129 mm |
| Weight | : 15 kg |

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

GCO 14-24J (0 601 B37 2L0)

HEAVY DUTY



1 607 014 171

105 pts

| | |
|--------------------|----------------|
| Capacity | |
| Power Input | : 2,400 W |
| Saw Blade Diameter | : 355 mm |
| Saw Blade Bore | : 25.4 mm |
| No-load Speed | : 3,800 rpm |
| Cutting Capacity | : 100 x 196 mm |
| | : 119 x 119 mm |
| | : 130 x 130 mm |
| Weight | : 18.1 kg |

Mitre Saw

GCM 10 MX (0 601 B29 0L0)

HEAVY DUTY



1 607 014 171

150 pts

| | |
|-----------------------|-----------------|
| Capacity | |
| Power Input | : 1,700 W |
| Blade Size | : 254 mm |
| Arbour Size | : 25.4 mm |
| No-load Speed | : 4,800 rpm |
| Max Mitre | : 45° L / 52° R |
| Max. Cutting Capacity | : 89 x 89 mm |
| Weight | : 16.8 kg |

GCM 12 GDL (0 601 B23 670)

HEAVY DUTY



2 610 021 311

520 pts

| | |
|------------------|-----------------|
| Capacity | |
| Power Input | : 2,000 W |
| Blade Size | : 305 mm |
| Arbour Size | : 30 mm |
| No-load Speed | : 3,800 rpm |
| Max. Mitre | : 52° L / 60° R |
| Cutting Capacity | : 104 x 341 mm |
| Weight | : 32.1 kg |

GCM 216 (0 601 B33 0L0)



150 pts

| | |
|-----------------------------|-----------------|
| Capacity | |
| Power Input | : 1,300 W |
| Saw Blade diameter | : 216 mm |
| Mitre Setting | : 47° L / 47° R |
| Bevel Setting | : 47° L / 0° R |
| Rated Input Power | : 1,300 W |
| Cutting Capacity, 0° | : 60 x 123 mm |
| Cutting Capacity, 45° Mitre | : 60 x 80 mm |
| Cutting Capacity, 45° Bevel | : 43 x 123 mm |
| No-load Speed | : 4,800 rpm |
| Weight | : 10.1 kg |

Slide Mitre Saw

GCM 8 SJL (0 601 B19 1L0)

HEAVY DUTY



1 609 B03 790

210 pts

| | |
|------------------|-----------------|
| Capacity | |
| Power Input | : 1,600 W |
| Blade Size | : 216 mm |
| Bore Size | : 25.4 mm |
| No-load Speed | : 5,500 rpm |
| Max. Miter | : 52° L / 60° R |
| Cutting Capacity | : 70 x 312 mm |
| Weight | : 17.3 kg |

Mitre Saw Stand

T 1B (0 601 B12 310)



| | |
|--|-----------------|
| Capacity | |
| Length of Work Bench without Extension | : 1,220 mm |
| Length of Work Bench with extension | : 2,630 mm |
| Weight | : 15 kg / 19 kg |

Table Saw

GTS 254 (0 601 B45 0L0)



140 pts

| | |
|-------------------------------|----------------------|
| Capacity | |
| Cutting depth 90° / 45° | : 80 / 55 mm |
| Rip cut capacity | : 545 mm |
| Power | : 1,800 W |
| Saw blade diameter | : 254 mm |
| Overload / restart protection | : Yes |
| Weight with Stand | : 24.4 kg |
| Stand Feet | : Yes |
| Table Material | : Steel with Coating |
| No-Load Speed | : 4,300 rpm |

GTS 10 J (0 601 B30 5L1)

HEAVY DUTY



2 610 018 332

310 pts

| | |
|--------------------------|----------------|
| Capacity | |
| Power Input | : 1,800 W |
| Saw Blade Diameter | : 254 mm |
| Bevel Setting | : 47° L / 2° R |
| Cutting Capacity (Right) | : 635 mm |
| (Left) | : 255 mm |
| Weight | : 26 kg |

Table Saw Stand

GTA 600 (0 601 B22 002)



| | |
|-----------------------|---------------------|
| Capacity | |
| Table Height | : 602 mm |
| Max. Length Extension | |
| Unfolded | : 450 x 520 (D x L) |
| Max. Load Capacity | : 60 kg |
| Weight | : 6.3 kg |

Eccentric Sander

GEX 125-1 A / GEX 125-1 AE (0 601 387 0L0) / (0 601 387 5L0)

HEAVY DUTY



2 609 120 199

60/70 pts

| | |
|---------------------|-----------------------|
| Capacity | |
| Power Input | : 250 W |
| No-load Speed | : 7,500 - 12,000 rpm |
| Oscillating Circuit | |
| Diameter | : 2.5 mm |
| Orbit Rate | : 15,000 - 24,000 opm |
| Sanding Plate | : 125 mm |
| Weight | : 1.3 kg |

Planer

GHO 6500 (0 601 596 0L0)



2 609 120 398

40 pts

| | |
|---------------------------|--------------|
| Capacity | |
| Power Input | : 650 W |
| No-load Speed | : 16,500 rpm |
| Adjustable Chip Thickness | : 0 - 2.6 mm |
| Adjustable Rebating Depth | : 0 - 9 mm |
| Weight | : 2.8 kg |

GHO 10-82 (0 601 594 006)

HEAVY DUTY



2 609 120 064

80 pts

| | |
|-----------------|--------------|
| Capacity | |
| Power Input | : 710 W |
| Planing Width | : 82 mm |
| Planing Depth | : 0 - 1.0 mm |
| No-load Speed | : 16,500 rpm |
| Weight | : 2.5 kg |

Belt Sander

GBS 75 A (0 601 274 004)

HEAVY DUTY



1 607 031 222

130 pts

| | |
|--------------------|---------------|
| Capacity | |
| Power Input | : 710 W |
| No-load Belt Speed | : 300 m/min |
| Sanding Surface | : 75 x 130 mm |
| Belt Size | : 75 x 533 mm |
| Weight | : 3.2 kg |

Polisher

GPO 950 (0 601 3A2 0L0)



70 pts

| | |
|--------------------------------|-------------------|
| Capacity | |
| Power Input | : 950 W |
| Adaptor Size | : M14 / M16 |
| Rubber Sanding Plate, Diameter | : 180 mm |
| Variable Speed | : 600 - 2,100 rpm |
| Weight | : 2.3 kg |

GPO 12 CE (0 601 389 0L0)

HEAVY DUTY



1 607 014 176

90 pts

| | |
|-----------------------------|-------------------|
| Capacity | |
| Power Input | : 1,250 W |
| No-load Speed | : 750 - 3,000 rpm |
| Polishing Disc Diameter | : 180 mm |
| Thread of Polishing Spindle | : M14 |
| Weight | : 2.5 kg |

Orbital Sander

GSS 140 (0 601 2A8 0L0)



20 pts

| | |
|-----------------------------|----------------------------|
| Capacity | |
| Power Input | : 220 W |
| No-load Speed | : 14,000 rpm |
| No-load Orbital Stroke Rate | : 28,000 min ⁻¹ |
| Orbital Diameter | : 1.5 mm |
| Sanding Sheet Dimension | : 114 x 140 mm |
| Sanding Plate Dimension | : 101 x 112 mm |
| Weight | : 1.2 kg |

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

18V Cordless

18V BITURBO

12V Cordless

Battery, Charger, L-BOXX, Trolley, Roller

Drill, Impact Drill, Multi-Cutter, Foam Cutter, Mixer Drill.

Straight Grinder, Angle Grinder, Bench Grinder

Diamond Cutter, Reciprocating Saw, Shear, Nibbler

Jigsaw, Circular Saw

Cut Off Machine, Mitre Saw, Table Saw

Planer, Sander, Polisher, Hot Air Gun, Router, Glue Gun, Blower, Vacuum

Rotary Hammer, Demolition Hammer

GSS 2300
(0 601 298 0L0)

30 pts

Capacity

| | |
|---------------|--------------|
| Power Input | : 190 W |
| No-load Speed | : 12,000 rpm |
| Weight | : 1.5 kg |

Hot Air Gun**GHG 18-60**
(0 601 2A6 1L0)**HEAVY DUTY**

40 pts

**Capacity**

| | |
|---------------|-------------------------|
| Power Input | : 1,800 W |
| Temperature | : 50 / 400 / 600 °C |
| Air Flow Rate | : 250 / 350 / 600 l/min |
| Weight | : 0.52 kg |

GHG 20-63
(0 601 2A6 2L0)**HEAVY DUTY**

60 pts

**Capacity**

| | |
|---------------|-------------------------|
| Power Input | : 2,000 W |
| Temperature | : 50 - 630 °C |
| Air Flow Rate | : 150 / 300 / 500 l/min |
| Weight | : 0.65 kg |

Trimming / Router**GKF 550**
(0 601 6A0 0L0)

40 pts

Capacity

| | |
|---------------|---------------|
| Power Input | : 550 W |
| No-load Speed | : 33,000 rpm |
| Bix Size | : 6 mm / 1/4" |
| Weight | : 1.4 kg |

GOF 130
(0 601 6B7 0L1)

70 pts

**Capacity**

| | |
|---------------|-----------------------|
| Power | : 1,300 W |
| No-load speed | : 11,000 - 28,000 rpm |
| Bit holder | : 6 - 8.0 mm |
| Plunge depth | : 55 mm |
| Weight | : 3.5 kg |

*"Strictly prohibited from being used upside down"***Glue Gun****GKP 200 CE**
(0 601 950 703)**HEAVY DUTY**

55 pts

**Capacity**

| | |
|-------------------------|------------|
| Power Input | : 500 W |
| Gluing Capacity | : 30 g/min |
| No. of Heating Elements | : 2 |
| Warming Up Time | : 4 min |
| Glue Stick Length | : 200 mm |
| Weight | : 0.4 kg |

Blower**GBL 620**
(0 601 980 5L0)

30 pts

Capacity

| | |
|---------------|--------------|
| Power Input | : 620 W |
| No-load Speed | : 16,000 rpm |
| Air Flow Rate | : 3.5 m³/min |
| Weight | : 1.7 kg |

GBL 82-270
(0 601 980 4L1)**HEAVY DUTY**

40 pts

Capacity

| | |
|---------------|------------------|
| Power Input | : 800 W |
| No-load Speed | : 0 - 16,000 rpm |
| Air Flow Rate | : 0 - 4.5 m³/min |
| Weight | : 1.8 kg |

Wet & Dry Vacuum Cleaner**GAS 15**
(0 601 9E5 0L0)**HEAVY DUTY**

80 pts

Capacity

| | |
|-----------------------------|----------------|
| Power Input | : 1,100 W |
| Container (gross/net) | : 15 / 8 litre |
| Max. Airflow Rate (Turbine) | : 53 l/sec |
| Max. Vacuum Pressure | : 22 kPa |
| Weight | : 6 kg |

GAS 12-25 PL
(0 601 97C 1L0)**HEAVY DUTY**

110 pts

Capacity

| | |
|-----------------------------|---------------|
| Power Input | : 1,250 W |
| Container (gross/net) | : 25/21 litre |
| Max. Airflow Rate (Turbine) | : 65 l/sec |
| Max. Vacuum Pressure | : 200 mbar |
| Weight | : 9.0 kg |

2 kg Rotary Hammer**GBH 220**
(0 611 2A6 0L0)

60 pts

Capacity

| | |
|--------------------------|-----------------|
| Impact Energy | : 2J |
| Power | : 720 W |
| No-load Speed | : 0 - 2,000 rpm |
| Max. drilling & Concrete | : 22 mm |
| Mode | : 3 |
| Weight | : 2.3 kg |

GBH 2-24 DRE
(0 611 272 1L0)**HEAVY DUTY**


80 pts

Capacity

| | |
|---------------|-----------------|
| Power Input | : 790 W |
| Impact Energy | : 2.7 J |
| In Concrete | : 4 - 24 mm |
| In Steel | : 13 mm |
| In Wood | : 30 mm |
| No-load Speed | : 0 - 930 rpm |
| Impact Rate | : 0 - 4,200 bpm |
| Weight | : 2.8 kg |

GBH 2-26 DRE
(0 611 253 76C)**HEAVY DUTY**


120 pts

**Capacity**

| | |
|---------------|-----------------|
| Power Input | : 800 W |
| Impact Energy | : 2.7 J |
| In Concrete | : 4 - 26 mm |
| In Steel | : 13 mm |
| In Wood | : 30 mm |
| No-load Speed | : 0 - 900 rpm |
| Impact Rate | : 0 - 4,000 bpm |
| Weight | : 2.7 kg |

GBH 2-26 DFR
(0 611 254 76C)**HEAVY DUTY**


140 pts

**Capacity**

| | |
|---------------|-----------------|
| Power Input | : 800 W |
| Impact Energy | : 3 J |
| In Concrete | : 4 - 26 mm |
| In Steel | : 13 mm |
| In Wood | : 30 mm |
| No-load Speed | : 0 - 900 rpm |
| Impact Rate | : 0 - 4,000 bpm |
| Weight | : 2.9 kg |

GBH 2-28 DFV
(0 611 267 2L1)**HEAVY DUTY**


150 pts

**Capacity**

| | |
|---------------|-----------------|
| Power Input | : 850 W |
| Impact Energy | : 3.2 J |
| In Concrete | : 4 - 28 mm |
| In Steel | : 13 mm |
| In Wood | : 30 mm |
| No-load Speed | : 0 - 1,300 rpm |
| Impact Rate | : 0 - 5,100 bpm |
| Weight | : 3.1 kg |

3 kg Rotary Hammer**GBH 3-28 DFR**
(0 611 24A 0L0)**HEAVY DUTY**

200 pts

**Capacity**

| | |
|---------------|-----------------|
| Power Input | : 800 W |
| Impact Energy | : 3.1 - 3.5 J |
| In Concrete | : 28 mm |
| In Steel | : 13 mm |
| In Wood | : 30 mm |
| No-load Speed | : 0 - 900 rpm |
| Impact Rate | : 0 - 4,000 bpm |
| Weight | : 3.6 kg |

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

4 kg Rotary Hammer

GBH 4-32 DFR
(0 611 332 1L0)

HEAVY DUTY



| | |
|-----------------|-----------------|
| Capacity | |
| Power Input | : 900 W |
| Impact Energy | : 4.2 J |
| In Concrete | : 32 mm |
| In Steel | : 13 mm |
| In Wood | : 32 mm |
| No-load Speed | : 0 - 760 rpm |
| Impact Rate | : 0 - 3,600 bpm |
| Weight | : 4.7 kg |

Rotary Hammer with SDS-Max

GBH 5-40 D
(0 611 269 0L0)

HEAVY DUTY



| | |
|--------------------------|---------------------|
| Capacity | |
| Power Input | : 1,100 W |
| Impact Energy (EPTA) | : 8.5 J |
| Max. App. in core cutter | : 90 mm |
| No-load Speed | : 170 - 340 rpm |
| Impact Rate | : 1,500 - 2,900 bpm |
| Weight | : 6.8 kg |

GBH 5-40 DCE
(0 611 264 070)

HEAVY DUTY



| | |
|---------------------------------------|---------------------------------|
| Capacity | |
| Power Input | : 1,150 W |
| Impact Energy | : 8.8 J |
| Impact Rate | : 1,500 - 3,050 bpm |
| No-load Speed | : 170 - 340 rpm |
| Drilling Dia Concrete | : 12 - 40 mm |
| Vibration Values Drilling /Chiselling | : 10.5 / 7 / 5 m/s ² |
| Weight | : 6.8 kg |

GBH 8-45 D
(0 611 265 1L0)

HEAVY DUTY



| | |
|-----------------------|---------------------|
| Capacity | |
| Power Input | : 1500 W |
| Impact Rate | : 1,380 - 2,720 bpm |
| Impact Energy | : 12.5 J |
| Drilling Dia Concrete | : 12 mm - 45 mm |
| Rated Speed | : 150 - 305 rpm |
| Weight | : 8.2 kg |

GBH 8-45 DV
(0 611 265 0L0)

HEAVY DUTY



| | |
|-----------------------|------------------------|
| Capacity | |
| Power Input | : 1500 W |
| Impact Rate | : 1,380 - 2,760 bpm |
| Impact Energy | : 12.5 J |
| Drilling Dia Concrete | : 12 mm - 45 mm |
| Vibration Values | |
| Drilling / Chiselling | : 8/7 m/s ² |
| Weight | : 8.9 kg |

Demolition Hammer

GSH 500 GEN II
(0 611 338 6L0)



| | |
|---------------------------|-------------------|
| Capacity | |
| Power Input | : 1,100 W |
| Impact Energy- EPTA Value | : 7.8J |
| Impact Rate | : 2,900 bpm |
| Tool holder | : Hex 17 mm |
| Auxiliary Handle | : Straight Handle |
| Weight | : 5.6 kg |

GSH 3 E
(0 611 320 703)

HEAVY DUTY



| | |
|-----------------|---------------|
| Capacity | |
| Power Input | : 650 W |
| Impact Rate | : 0-3,500 bpm |
| Impact Force | : 2.6 J |
| Weight | : 3.7 kg |

GSH 5 (MAX)
(0 611 337 0L0)

HEAVY DUTY



| | |
|-----------------|-------------|
| Capacity | |
| Power Input | : 1,100 W |
| Impact Rate | : 2,850 bpm |
| Impact Energy | : 7.5 J |
| Weight | : 5.6 kg |

GSH 5 CE
(0 611 321 0L0)

HEAVY DUTY



| | |
|-----------------|---------------------|
| Capacity | |
| Power Input | : 1,150 W |
| Impact Rate | : 1,300 - 2,900 bpm |
| Impact Energy | : 13 J |
| Weight | : 6.2 kg |

GSH 9 VC
(0 611 322 0L0)

HEAVY DUTY



| | |
|-----------------|------------------------|
| Capacity | |
| Power Input | : 1,500 W |
| Impact Force | : 13 J |
| Vibration Value | : 9.5 m/s ² |
| Weight | : 8.5 kg |

GSH 11 E
(0 611 316 8L1)

HEAVY DUTY



| | |
|-----------------|-------------------------|
| Capacity | |
| Power Input | : 1,500 W |
| Impact Energy | : 16.8 J |
| Impact Rate | : 900 - 1,890 bpm |
| Vibration Value | : 18.5 m/s ² |
| Weight | : 10.1 kg |

GSH 11 VC
(0 611 336 0L0)

HEAVY DUTY



| | |
|-----------------------------|----------------------|
| Capacity | |
| Power Input | : 1,700 W |
| Impact Rate | : 900 - 1,700 bpm |
| Impact Force | : 23 J |
| Vibration Values Chiselling | : 8 m/s ² |
| Weight | : 11.4 kg |

GSH 14 C (HEX)
(0 611 344 0L0)

HEAVY DUTY



| | |
|-----------------------------|-------------|
| Capacity | |
| Rated Input Power | : 1,750 W |
| Impact Energy (EPTA) | : 28 J |
| Impact Rated at | : 1,900 bpm |
| Rated Speed | |
| Weight (EPTA-01:2014) | : 14.6 kg |
| Tool Holder | : Hex 22 mm |
| Vibration emission value ah | : 10.9 |
| Uncertainty K | : 1.5 |



GSH 16-30 (HEX)
(0 611 335 1L0)

HEAVY DUTY



| | |
|-----------------|-------------|
| Capacity | |
| Power Input | : 1,750 W |
| Impact Rate | : 1,300 bpm |
| Impact Force | : 41 J |
| Weight | : 16.9 kg |

GSH 27 VC (Hex 28mm)
(0 611 30A 070)

HEAVY DUTY



| | |
|-----------------------------|------------------------|
| Capacity | |
| Power Input | : 2,000 W |
| Impact Rate | : 1,000 bpm |
| Impact Force | : 62 J |
| Vibration Values Chiselling | : 8.5 m/s ² |
| Weight | : 29.5 kg |

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (T) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.



BOSCH

The ultimate changing system.

JUST ONE CLICK.

XLOCK



GWX 9-125 S
(0 601 7B2 000)



80 pts

| Capacity | |
|------------------------------|----------------------|
| Rated Input Power | : 900 W |
| No-load Speed | : 2,800 - 11,000 rpm |
| Disc Diameter | : 125 mm |
| Power Output | : 450 W |
| Rubber Backing pad, Diameter | : 125 mm |
| Wire Cup Brush, Diameter | : 75 mm |
| Weight | : 2.1 kg |
| Switch | : Lockable Switch |

GWX 14-125
(0 601 7B7 000)



70 pts

| Capacity | |
|------------------------------|-------------------|
| Rated Input Power | : 1,400 W |
| No-load Speed | : 11,000 rpm |
| Disc Diameter | : 125 mm |
| Power Output | : 820 W |
| Rubber Backing pad, Diameter | : 125 mm |
| Wire Cup Brush, Diameter | : 75 mm |
| Weight | : 2.3 kg |
| Switch | : Lockable Switch |

GWX 15-125 PS
(0 601 7B9 002)



90 pts

| Capacity | |
|------------------------------|----------------------|
| Rated Input Power | : 1,500 W |
| No-load Speed | : 2,800 - 11,000 rpm |
| Disc Diameter | : 125 mm |
| Power Output | : 820 W |
| Rubber Backing pad, Diameter | : 125 mm |
| Wire Cup Brush, Diameter | : 75 mm |
| Weight | : 2.5 kg |
| Switch | : PROtection Switch |



GWX 180 Solo**
(0 601 9H9 1K0)



80 pts

| Capacity | |
|--------------------|--------------|
| Battery Voltage | : 18 V |
| No-load Speed | : 11,000 rpm |
| Disc Diameter | : 125 mm |
| Weight w/o Battery | : 1.8 kg |

GWX 18V-10 C Solo**
(0 601 7B0 200)



130 pts

| Capacity | |
|--------------------|-------------|
| Battery Voltage | : 18 V |
| No-load Speed | : 9,000 rpm |
| Disc Diameter | : 125 mm |
| Weight w/o Battery | : 2.0 kg |

GWX 18V-10 PC Solo**
(0 601 7B0 700)



130 pts

| Capacity | |
|--------------------|-------------|
| Battery Voltage | : 18 V |
| No-load Speed | : 9,000 rpm |
| Disc Diameter | : 125 mm |
| Weight w/o Battery | : 2.0 kg |

GWX 18V-15 SC Solo**
(0 601 9H6 500)



170 pts

| Capacity | |
|--------------------|---------------------|
| Battery Voltage | : 18 V |
| No-load Speed | : 3,400 - 9,000 rpm |
| Disc Diameter | : 125 mm |
| Weight w/o Battery | : 2.3 kg |

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo – Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.



Dust Free Solution

The Click & Clean System is not only perfectly thought through, it is also really easy to use: connect the dust extractor and start working! This overview offers you a helpful guide to the tools, part numbers and extras such as adapters and accessories. You will also find mobile solutions for individual systems.














Listed adapters need to work with vacuum cleaner unless special remarked























| Product | Model / Application | Adapter No. | Adapter Picture | Application Picture |
|---|---|--|---|---|
| GWS Series  *T: Guard assembly Toolless *EA: Easy Adjust *FC: Full Coverd | Disc 100 mm Disc 115 / 125 mm Keyless | 2 608 000 629 2 605 510 224 |  |  |
| | Disc 115 / 125 mm Max. cutting depth 25 mm | GDE 125 EA-T 1 600 A00 3DJ |  |  |
| | Disc 125 mm Max. cutting depth 25 mm Disc 230 mm Max. cutting depth 60 mm | GDE 125 FC-T 1 600 A00 3DK GDE 230 FC-T 1 600 A00 3DM |  |  |
| GSB Series  | For all GSB & GBH Holes Ø4-36 mm | Dust Cup 1.600.A00.D6H Work without vacuum |  |  |
| | Holes or core cutter Ø4-24 mm | GDE 24 1 600 A01 M9V Work with or without vacuum |  |  |
| GBH Series  | For 50 mm collar tool Holes Ø4-16 mm Or max 82 mm core cutter (Interchangeable adapter included) | GDE 16 Plus 1 600 A00 15Z |  |  |
| | Only for GBH 18V-26 Holes Ø4-16 mm | GDE 18V-16 1 600 A00 51M *Self vacuum |  |  |
| GSH Series  | For chiseling Max length 600 mm | GDE Max 1 600 A00 1G9 |  |  |
| | For breaking | GDE HEX 1 600 A00 1GA |  |  |
| GST Series  | GST 12 V-Li GST 700 | 1 619 P10 585 Dust adapter included |  |  |
| GKS Series  | GKS 190 GKS 7000 GKS 12 V-Li GKS 66 X / GKS 18 V-57 | 1 619 P06 204 1 619 P11 691 1 619 P11 537 1 619 P11 691 |  |  |

Rotary Hammers application overview

Masonry: ■ Optimal ■ Total range of all application

Concrete: ■ Optimal ■ Total range of all application

| Products | | Drilling diameter in concrete, masonry (mm) | | | | | | | | | | | | | | | | | | | | | | | | | | | | Drilling in wood (mm) | | | | Drilling in steel (mm) | |
|-----------------------|--|---|---|---|----|----|----|----|----|----|----|----|----|------------------------|----|----|----|-------------------------|----|------------------------|----|----|----|-------------------------|----|----|----------|-------------------------|-------|-----------------------|----------|-------|--|------------------------|--|
| | | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 28 | 30 | 32 | 34 | 36 | 38 | 40 | 42 | 44 | 46 | 48 | 50 | 52 | up to 20 | 20-25 | 25-30 | 30-40 | up to 10 | 10-13 | | | |
| 2 kg Hammers |  GBH 220 Professional | [Red bar: 4-22, Blue bar: 4-22] | | | | | | | | | | | | | | | | | | | | | | [Dark Blue bar: 20-30] | | | | [Light Blue bar: 10-13] | | | | | | | |
| |  GBH 2-24 DRE Professional | [Red bar: 4-24, Blue bar: 4-24] | | | | | | | | | | | | | | | | | | | | | | [Dark Blue bar: 20-30] | | | | [Light Blue bar: 10-13] | | | | | | | |
| |  GBH 2-26 DRE Professional | [Red bar: 4-26, Blue bar: 4-26] | | | | | | | | | | | | | | | | | | | | | | [Dark Blue bar: 20-30] | | | | [Light Blue bar: 10-13] | | | | | | | |
| |  GBH 2-26 DFR Professional | [Red bar: 4-26, Blue bar: 4-26] | | | | | | | | | | | | | | | | | | | | | | [Dark Blue bar: 20-30] | | | | [Light Blue bar: 10-13] | | | | | | | |
| |  GBH 2-28 DFV Professional | [Red bar: 4-28, Blue bar: 4-28] | | | | | | | | | | | | | | | | | | | | | | [Dark Blue bar: 20-30] | | | | [Light Blue bar: 10-13] | | | | | | | |
| 2 kg Cordless Hammers |  GBH 180-LI Professional | [Red bar: 4-20, Blue bar: 4-20] | | | | | | | | | | | | | | | | | | | | | | [Dark Blue bar: 20-30] | | | | [Light Blue bar: 10-13] | | | | | | | |
| |  GBH 185-LI Professional | [Red bar: 4-22, Blue bar: 4-22] | | | | | | | | | | | | | | | | | | | | | | [Dark Blue bar: 20-30] | | | | [Light Blue bar: 10-13] | | | | | | | |
| |  GBH 187-LI One Chuck Professional | [Red bar: 4-24, Blue bar: 4-24] | | | | | | | | | | | | | | | | | | | | | | [Dark Blue bar: 20-30] | | | | [Light Blue bar: 10-13] | | | | | | | |
| |  GBH 18 V-26 Professional | [Red bar: 4-26, Blue bar: 4-26] | | | | | | | | | | | | | | | | | | | | | | [Dark Blue bar: 20-30] | | | | [Light Blue bar: 10-13] | | | | | | | |
| 3 kg Hammer |  GBH 3-28 DFR Professional | [Red bar: 4-28, Blue bar: 4-28] | | | | | | | | | | | | | | | | | | | | | | [Dark Blue bar: 20-30] | | | | [Light Blue bar: 10-13] | | | | | | | |
| 4 kg Hammer |  GBH 4-32 DFR Professional | [Red bar: 4-32, Blue bar: 4-32] | | | | | | | | | | | | | | | | | | | | | | [Dark Blue bar: 20-30] | | | | [Light Blue bar: 10-13] | | | | | | | |
| 6 kg Hammer |  GBH 5-40 DCE Professional | [Red bar: 12-40, Blue bar: 12-40] | | | | | | | | | | | | [Dark Blue bar: 20-30] | | | | [Light Blue bar: 10-13] | | | | | | | | | | | | | | | | | |
| 8 kg Hammer |  GBH 8-45 D / DV Professional | [Red bar: 12-45, Blue bar: 12-45] | | | | | | | | | | | | | | | | | | [Dark Blue bar: 20-30] | | | | [Light Blue bar: 10-13] | | | | | | | | | | | |

| Drilling with hole saws in wood (mm) | | | | Core cutting application in masonry, concrete (mm) | | | | Material for drilling | | | | | | Other characteristics | | |
|--------------------------------------|-------|-------|-------|--|-------|-------|--------|-------------------------------------|----------|-----------------------|-----------|-----------|-------|----------------------------|-------------------|--|
| up to 30 | 30-40 | 40-50 | 50-70 | 40-68 | 68-82 | 82-90 | 90-150 | Reinforced concrete, granite, stone | Concrete | Bricks, hollow blocks | Hard wood | Soft wood | Metal | Drilling/ Chiselling ratio | Working direction | Special features |
| ■ | | | | ■ | | | | ■ | ■ | ■ | ■ | ■ | ■ | 90% 10% | ↕ | |
| ■ | ■ | | | ■ | | | | ■ | ■ | ■ | ■ | ■ | ■ | 90% 10% | ↕ | |
| ■ | ■ | ■ | | ■ | | | | ■ | ■ | ■ | ■ | ■ | ■ | 90% 10% | ↕ | |
| ■ | ■ | ■ | | ■ | | | | ■ | ■ | ■ | ■ | ■ | ■ | 90% 10% | ↕ | Quick change chuck |
| ■ | ■ | ■ | | ■ | ■ | | | ■ | ■ | ■ | ■ | ■ | ■ | 90% 10% | ↕ | Quick change chuck  |
| ■ | | | | ■ | | | | ■ | ■ | ■ | ■ | ■ | ■ | 90% 10% | ↕ |   |
| ■ | | | | ■ | | | | ■ | ■ | ■ | ■ | ■ | ■ | 90% 10% | ↕ |      |
| ■ | | | | ■ | | | | ■ | ■ | ■ | ■ | ■ | ■ | 90% 10% | ↕ |        |
| ■ | ■ | ■ | | ■ | | | | ■ | ■ | ■ | ■ | ■ | ■ | 90% 10% | ↕ |    |
| ■ | ■ | ■ | | ■ | ■ | | | ■ | ■ | ■ | ■ | ■ | ■ | 80% 20% | ↕ | Quick change chuck  |
| ■ | ■ | ■ | | ■ | ■ | ■ | | ■ | ■ | ■ | ■ | ■ | ■ | 70% 30% | ↕ | Quick change chuck  |
| | | | | ■ | ■ | ■ | | ■ | ■ | ■ | | | | 60% 40% | ↕ |  |
| | | | | ■ | ■ | ■ | ■ | ■ | ■ | ■ | | | | 50% 50% | ↕ |  Anti Vibration for GBH 8-45 DV only |

Demolition Hammers application overview

■ Optimal ■ Possible

| | | Specification | | | | | | | | |
|---|---|-------------------|---------------------------------------|---------------|---|---|---|---|---|---|
| | | Power | Weight | Impact energy | Tool holder | Working direction | Wall tile removal | Floor tile removal | Joint repair (removal of excess concrete) | De-plastering (removing cement plaster from the walls) |
| | | | | | | |  |  |  |  |
|  | GSH 3 E Professional | 650 W | 3.7 kg | 2.6 J |  |  | ■ | ■ | ■ | ■ |
|  | GSH 5 Professional | 1100 W | 5.6 kg | 7.5 J |  |  | ■ | ■ | ■ | ■ |
|  | GSH 500 (GEN II) Professional | 1100 W | 5.5 kg | 7.8 J | 17 mm Hex |  | ■ | ■ | ■ | ■ |
|  | GSH 5 CE Professional | 1150 W | 6.2 kg | 13 J |  |  | ■ | ■ | ■ | ■ |
|  | GSH 9 VC Professional | 1500 W | 8.5 kg | 13 J |  |  | ■ | ■ | ■ | ■ |
|  | GSH 11 E Professional | 1500 W | 10.1 kg | 6-25 J |  |  | | ■ | ■ | ■ |
|  | GSH 11 VC Professional | 1700 W | 11.4 kg | 23 J |  |  | | ■ | ■ | ■ |
|  | GSH 14 C Professional | 1750 W | 14.8 kg | 28 J | 22mm Hex |  | | | | |
|  | GSH 16-30 Professional | 1750 W | 16.9 kg | 41 J | 30 mm Hex |  | | | | |
| Accessories |  | Pointed chisel | SDS plus/SDS max/Hex 17/Hex 28/Hex 30 | | | | ■ | ■ | ■ | ■ |
| |  | Flat chisel | SDS plus/SDS max/Hex 17/Hex 28/Hex 30 | | | | ■ | ■ | ■ | ■ |
| |  | Tile chisel | SDS plus/SDS max | | | | ■ | ■ | | |
| |  | Spade chisel | SDS plus/SDS max/Hex 28/Hex 30 | | | | ■ | ■ | ■ | ■ |
| |  | Gouging chisel | SDS plus/SDS max | | | | | | | |
| |  | Bush hammer head | SDS max | | | | | | | |
| |  | Asphalt cutter | SDS max | | | | | | | |
| |  | Tamping plate | SDS max/Hex 28/Hex 30 | | | | | | | |
| |  | Excavation chisel | SDS max/Hex 30 | | | | | | | |

Application

| Roughing of concrete walls, columns | Wall chasing or groove cutting on masonry, cement blocks, concrete walls | Concrete wall corrections | Column & beam corrections (removing bulge, exposing reinforcements) | Making cut outs or breaches in masonry wall | Hacking of concrete & masonry walls (heavy duty) | Demolition of concrete floor, slabs | Foundation breaking, pavement breaking | Road works (Restoration of Asphalt coverings) | Digging in hard compacted soil | Compacting earth & gravel |
|-------------------------------------|--|---------------------------|---|---|--|-------------------------------------|--|---|--------------------------------|---------------------------|
| | | | | | | | | | | |
| | ■ | | | | | | | | | |
| ■ | ■ | ■ | ■ | ■ | ■ | | | | | |
| ■ | ■ | ■ | ■ | ■ | ■ | | | | | |
| ■ | ■ | ■ | ■ | ■ | ■ | | | | | |
| ■ | ■ | ■ | ■ | ■ | ■ | | | | | |
| ■ | | | ■ | ■ | ■ | ■ | ■ | ■ | | |
| ■ | | | ■ | ■ | ■ | ■ | ■ | ■ | | |
| | | | | | | ■ | ■ | ■ | ■ | ■ |
| | | | | | | ■ | ■ | ■ | ■ | ■ |
| | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | | |
| | | | | | | | | | | |
| | ■ | | | | | | | | | |
| ■ | | | | | | | | | | |
| | | | | | | | | ■ | | |
| | | | | | | | | | | ■ |
| | | | | | | | | | ■ | |



BOSCH

**ALL BOSCH PROFESSIONAL POWER TOOLS
NOW COMES WITH 12 MONTHS WARRANTY**

12 months



**HEAVY
DUTY**

6 Months Extended Warranty

**Valid for all Heavy Duty tools purchased and
registered on the BeConnected App in 2023**

Register E-warranty and Earn Rewards Now.

Battery and charger are not entitle for warranty extension



DOWNLOAD APP NOW:





BOSCH

PROMIX

FREE BATTERY & MORE WITH 18V TOOLS PURCHASE


DATE: 1 APRIL - 31 DECEMBER 2023



NOW WITH GREATER REWARDS

| | | | | | |
|---|--|--|---|--|---|
| BUY  x2 | GET GBA 18V 4.0Ah M-C  | NEW BUY  x3 | GET Bosch tool bag + ProCore 18V 4.0Ah  | NEW BUY  x4 | GET ProCORE 18V 8.0Ah + Bosch tool bag + GAL 1880 CV  |
| Each participating tools = 100 PROMIX points | Each account can earn maximum 1,200 PROMIX points | Promotion only valid for Private & Professional BeConnected Users | | | |

HERE'S HOW

| | | | |
|--|--|--|--|
|  STEP 1 Buy two or more 18V participating tools from 1 Apr - 31 Dec 23 |  STEP 2 Download BeConnected App and Login / Register for an Account |  STEP 3 Register the tools 1. Upload valid and clear invoice (incl. purchase date & model) 2. Upload photo of the tool's name plate |  STEP 4 Collect and redeem PROMIX points from BeConnected Redemption Centre |
|--|--|--|--|

 **BeConnected**



 FREE DOWNLOAD App Store  FREE DOWNLOAD Google Play

T&C Apply.

For more info, please contact:

Robert Bosch Sdn Bhd 220975-V

Hotline: **1800 880 188** (Mon-Fri 9am-5pm)

 www.bosch-pt.com.my  [Boschpt.my](https://www.facebook.com/Boschpt.my)  [boschptmy](https://www.instagram.com/boschptmy)



BOSCH



MEASURING TOOLS PRODUCT CATALOGUE 2023

Bosch Professional.

UPGRADE YOUR EFFICIENCY.


MeasureOn is your app for easy documentation of floor plans, measurements, photos, and notes. Benefit from a high degree of flexibility and process your data anywhere – on the construction site, at the office, on the move, or at home.

USE THE NEW INFINITE WORKSPACE

Start your project and save all information in one place – the digital workspace. Arrange the collected data according to your personal needs and expand the workspace at any time.

ADD PHOTOS

Take photos with your smart device, then simply insert them into the infinite workspace, and use your laser range finder to add measured values to your photos.

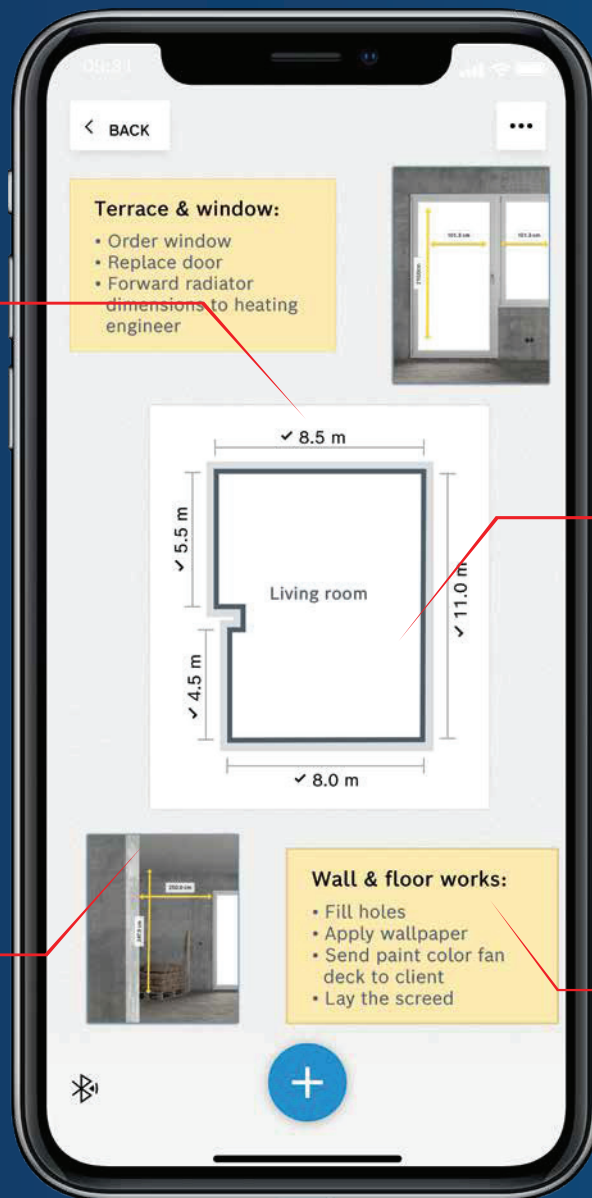

SKETCH FLOOR PLANS

Use your finger to quickly and intuitively sketch floor plans organised by individual rooms. With your laser range finder you can capture measurements instantly and insert them error-free into the app.

ADD NOTES

Say goodbye to scraps of paper: add all your notes to the flexible workspace and access them anywhere at any time.



iOS



Android

BOSCH LEVELLING REMOTE APP – CONTROLLING OF COMBI AND LINE LASERS VIA SMARTPHONE

With the Bosch Professional combi and line lasers, all kinds of levelling tasks can be completed with just one tool. As they are particularly easy to use, you can adjust the laser quickly and easily.

Experience even greater precision when you connect your tools to the Bosch Levelling Remote app via a Bluetooth® connection. This hands-free operation allows you to turn lines on and off, activate receiver mode or put your tool on standby without the slightest wobble of the laser. With the help of the RM 3 Professional motorised multifunctional mount, the laser lines can be adjusted accurate to the nearest millimetre. You can also adjust the visibility of the laser via the app according to the ambient light or remaining battery life.



iOS



Android



BOSCH THERMAL APP – MEASURE TEMPERATURES AND SEND THEM TO YOUR SMARTPHONE

With Bosch Professional infra-red camera for a rapid overview and thermo detector for detail, you can measure and record surface temperatures easily and quickly. Bosch thermo tools provide absolute reliability in areas such as heating, air conditioning and climate technology, plumbing, electrics or in industry.

Measurement and documentation has become simpler thanks to a Wi-Fi module that creates a Wi-Fi hotspot around it. This means you can import your results directly to the Bosch Thermal App and keep working with them there.



iOS



Android






LASER MEASURE

GLM 40 PROFESSIONAL

Simple and Easy with One Push



20 pts
IP 54



| Technical Specifications | |
|--------------------------|----------------------|
| Part number | 0 601 072 9K0 |
| Laser class | 2 |
| Measuring range | 0.15 – 40.00 m |
| Measuring accuracy | ± 2.0 mm* |
| Unit of measurement | m/ft |
| Power supply | 2 x 1.5 V LR03 (AAA) |
| Weight | 0.1 kg |
| Scope of delivery | 2 x AAA battery |

Accessories


- Pouch

GLM 400 PROFESSIONAL

Conversion at One Press



30 pts
IP 54

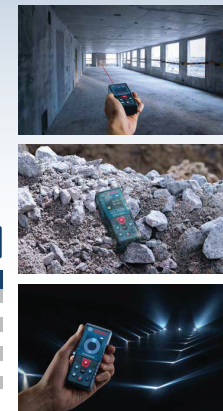

| Technical Specifications | |
|--------------------------|-----------------------------|
| Part number | 0 601 072 RK0 |
| Laser class | 2 |
| Measuring range | 0.05 – 40.00 m |
| Measuring accuracy | ± 1.5 mm* |
| Unit of measurement | m/cm; ft/inch |
| Power supply | 2 x 1.5 V LR03 (AAA) |
| Weight | 0.1 kg |
| Scope of delivery | Hand strap, 2 x AAA battery |

GLM 50-23 G PROFESSIONAL

2-in-1 Laser Measure with Green Laser for Rough Jobsites



50 pts
IP 54



| Technical Specifications | |
|----------------------------|--------------------|
| Part number | 0 601 072 VK0 |
| Laser class | 2 |
| Measuring range | 0.05 – 50.00 m |
| Measuring accuracy | ± 1.5 mm* |
| Measuring range (angle) | 0 – 360° (4 x 90°) |
| Measuring accuracy (angle) | ± 0.2° |
| Unit of measurement | m/cm; ft/inch |
| Power supply | 2 x 1.5 V LR6 (AA) |
| Weight | 0.2 kg |
| Scope of delivery | 2 x AA battery |

Accessories

- Pouch
- 3.7 V Battery
- BT 150

GLM 50-27 CG PROFESSIONAL

Robust and Reliable Laser Measure with Green Laser for Excellent Visibility



50 pts
IP 54



| Technical Specifications | |
|----------------------------|-----------------------|
| Part number | 0 601 072 LK0 |
| Laser class | 2 |
| Measuring range | 0.05 – 50.00 m |
| Measuring accuracy | ± 1.5 mm* |
| Measuring range (angle) | 0 – 360° (4 x 90°) |
| Measuring accuracy (angle) | ± 0.2° |
| Unit of measurement | m/cm; ft/inch |
| Power supply | 2 x 1.5 V LR6 (AA) |
| Weight | 0.2 kg |
| Scope of delivery | Pouch, 2 x AA battery |

Accessories

- Pouch
- 3.7 V Battery
- BT 150

GLM 100-25 C PROFESSIONAL

Precise Laser Measure for Outdoor Measuring and Documenting



120 pts
IP 54



| Technical Specifications | |
|----------------------------|-----------------------|
| Part number | 0 601 072 YK0 |
| Laser class | 2 |
| Measuring range | 0.08 – 100.00 m |
| Measuring accuracy | ± 1.5 mm* |
| Measuring range (angle) | 0 – 360° (4 x 90°) |
| Measuring accuracy (angle) | ± 0.2° |
| Unit of measurement | m/cm; ft/inch |
| Power supply | 3 x 1.5 V LR6 (AA) |
| Weight | 0.2 kg |
| Scope of delivery | Pouch, 3 x AA battery |

Accessories

- Pouch

GLM 150 C PROFESSIONAL

Long Range Laser Measure Applicable for All Surroundings with Documentation



150 pts
IP 54



| Technical Specifications | |
|----------------------------|-----------------------------------|
| Part number | 0 601 072 FK0 |
| Laser class | 2 |
| Measuring range | 0.08 – 150.00 m |
| Measuring accuracy | ± 1.5 mm* |
| Measuring range (angle) | 0 – 360° (4 x 90°) |
| Measuring accuracy (angle) | ± 0.2° |
| Unit of measurement | m/cm; ft/inch |
| Power supply | 3 x 1.5 V LR6 (AA) |
| Weight | 0.2 kg |
| Scope of delivery | Pouch, hand strap, 3 x AA battery |

Accessories

- BT 150



INCLINOMETER

GIM 60 L PROFESSIONAL

Laser-accurate Incline Transfer Over Longer Distances




130 pts

| Technical Specifications | |
|--------------------------|-----------------------------------|
| Part number | 0 601 076 900 |
| Laser class | 2 |
| Length | 60 cm |
| Measuring range | 0 – 360° (4 x 90°) |
| Measuring accuracy | ± 0,05° (0°/90°); ± 0,2° (1°-89°) |
| Laser range | 30 m |
| Power supply | 4 x 1.5 V LR6 (AA) |
| Weight | 0.9 kg |
| Scope of delivery | Protective bag, 4 x AA battery |



GIM 120 PROFESSIONAL

Longer for Better Precision

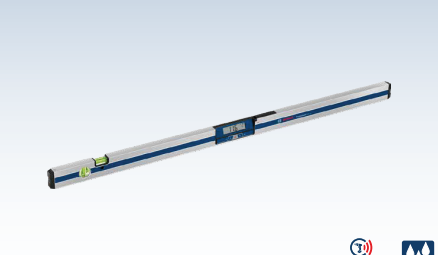

120 pts

| Technical Specifications | |
|--------------------------|-----------------------------------|
| Part number | 0 601 076 800 |
| Length | 120 cm |
| Measuring range | 0 – 360° (4 x 90°) |
| Measuring accuracy | ± 0,05° (0°/90°); ± 0,2° (1°-89°) |
| Power supply | 4 x 1.5 V LR6 (AA) |
| Weight | 1.4 kg |
| Scope of delivery | Protective bag, 4 x AA battery |



ANGLE MEASURER


GAM 220 PROFESSIONAL

Precise and Easy Angle Measurement



110 pts

| Technical Specifications | |
|--------------------------|--------------------------------|
| Part number | 0 601 076 500 |
| Arm length | 40 cm |
| Measuring range | 0 – 220° |
| Measuring accuracy | ± 0,1° |
| Power supply | 4 x 1.5 V LR6 (AA) |
| Weight | 1.3 kg |
| Scope of delivery | Protective bag, 4 x AA battery |

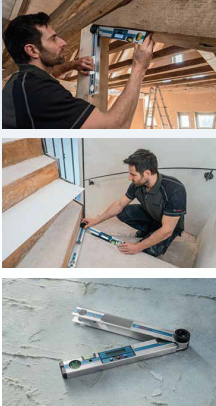

GPL 3 G PROFESSIONAL

Robust and Compact 3-point Laser with Highly Visible Green Laser Points



30 pts

| Technical Specifications | |
|--------------------------|--|
| Part number | 0 601 066 N00 |
| Laser class | 2 |
| Projection | 3 points |
| Working range | up to 30 m |
| Accuracy | ± 0,35 mm/m°; ± 0,7 mm/m° (bottom point) |
| Self-levelling range | ± 4° |
| Power supply | 2 x 1.5 V LR6 (AA) |
| Weight | 0.4 kg |
| Scope of delivery | Pouch, 2 x AA battery |



Accessories
• BT 150

GPL 5 G PROFESSIONAL

Robust and Compact 5-point Laser with Highly Visible Green Laser Points



60 pts

| Technical Specifications | |
|--------------------------|--|
| Part number | 0 601 066 P00 |
| Laser class | 2 |
| Projection | 5 points |
| Working range | up to 30 m |
| Accuracy | ± 0,35 mm/m°; ± 0,7 mm/m° (bottom point) |
| Self-levelling range | ± 4° |
| Power supply | 2 x 1.5 V LR6 (AA) |
| Weight | 0.4 kg |
| Scope of delivery | Pouch, 2 x AA battery |



Accessories
• BT 150



POINT LASER



COMBI LASER




GCL 2-50 CG PROFESSIONAL

Optimum Visibility Connected with Smart Functions



- DUAL POWER
- Professional
- GREEN LASER TECHNOLOGY
- 170 pts
- IP 54

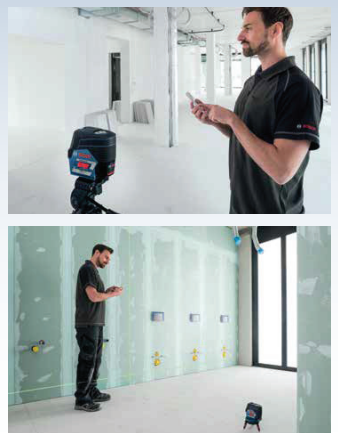

| Technical Specifications | |
|--------------------------|---|
| Part number | 0 601 066 H80 |
| Laser class | 2 |
| Projection | 2 lines; 2 points |
| Working range | up to 50 m (line); 10 m (point) |
| Accuracy | ± 0.3 mm/m* (line); ± 0.7 mm/m* (point) |
| Self-levelling range | ± 4° |
| Power supply | 4 x 1.5 V LR6 (AA) / 12 V Li-Ion / 10.8 V Li-Ion |
| Weight | 0.6 kg |
| Scope of delivery | Carrying case, pouch, RM 2, target plate, AA1, 4 x AA battery |


- Accessories**
- LR 7
 - Mounting Clamp
 - BM 1
 - RM 2
 - RM 3
 - RC 2
 - BT 150/BT 150-5/8"
 - BT 350
 - Laser Glasses Green
 - Target Plate
 - 12 V Li-Ion
 - 10.8 V Li-Ion

GCL 2-15 G PROFESSIONAL

Combi Green Laser Level with Better Visibility



- GREEN LASER TECHNOLOGY
- 140 pts
- IP 54

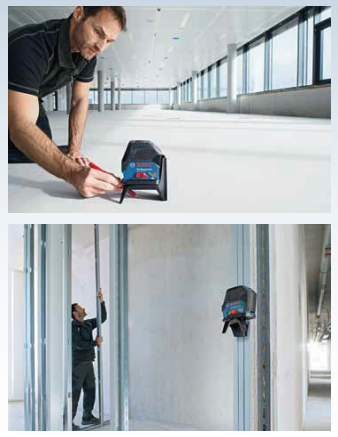

| Technical Specifications | |
|--------------------------|---|
| Part number | 0 601 066 J00 |
| Laser class | 2 |
| Projection | 2 lines; 2 points |
| Working range | up to 15 m (line); 10 m (point) |
| Accuracy | ± 0.3 mm/m* (line); ± 0.7 mm/m* (point) |
| Self-levelling range | ± 4° |
| Power supply | 3 x 1.5 V LR6 (AA) |
| Weight | 0.5 kg |
| Scope of delivery | Carrying case, pouch, RM 1, ceiling clamp, target plate, 3 x AA battery |

- Accessories**
- RM 1
 - BT 150
 - BT 150-5/8"
 - Laser Glasses Green



LINE LASER


GLL 3-15 X PROFESSIONAL

3-line Laser with Improved Line Visibility for Increased Work Efficiency



30 pts
IP 54

| Technical Specifications | |
|--------------------------|---|
| Part number | 0 601 063 M80 |
| Laser class | 2 |
| Projection | 3 lines; 1 point |
| Working range | up to 15 m (line); 5 m (point) |
| Accuracy | ± 0.7 mm/m* (point); ± 0.2 mm/m* (horizontal); ± 0.3 mm/m* (vertical) |
| Self-levelling range | ± 3° |
| Power supply | 4 x 1.5 V LR6 (AA) |
| Weight | 0.5 kg |
| Scope of delivery | Carrying bag, 4 x AA battery |



- Accessories**
- BT 150-5/8"
 - Laser Glasses Red


GLL 5-50 X PROFESSIONAL

5-line Laser with Improved Line Visibility for Increased Work Efficiency



40 pts
IP 54

| Technical Specifications | |
|--------------------------|---|
| Part number | 0 601 063 N81 |
| Laser class | 2 |
| Projection | 5 lines; 1 point |
| Working range | up to 50 m (line); 5 m (point) |
| Accuracy | ± 0.2 mm/m* (horizontal); ± 0.7 mm/m* (point); ± 0.3 mm/m* (vertical) |
| Self-levelling range | ± 3° |
| Power supply | 4 x 1.5 V LR6 (AA) |
| Weight | 0.5 kg |
| Scope of delivery | Carrying bag, 4 x AA battery |



- Accessories**
- LR 6
 - LR 7
 - Mounting Clamp
 - BT 150-5/8"
 - Laser Glasses Red
 - Target Plate

GLL 3-80 PROFESSIONAL

3 x 360° for Visibility on a New Level



300 pts
IP 54

| Technical Specifications | |
|--------------------------|--|
| Part number | 0 601 063 S00 |
| Laser class | 2 |
| Projection | 3 x 360° lines |
| Working range | up to 120 m (radius) |
| Accuracy | ± 0.3 mm/m* |
| Self-levelling range | ± 4° |
| Power supply | 4 x 1.5 V LR6 (AA) |
| Weight | 0.8 kg |
| Scope of delivery | Carrying case, pouch, target plate, 4 x AA battery |



- Accessories**
- LR 6
 - LR 7
 - Mounting Clamp
 - BM 1
 - BT 150
 - BT 150-5/8"
 - LR 350
 - Laser Glasses Red
 - Target Plate

GLL 3-60 XG PROFESSIONAL

3 x 360° Green Line Laser – All-round Levelling Solution



270 pts
IP 54

| Technical Specifications | |
|--------------------------|--|
| Part number | 0 601 063 ZK0 |
| Laser class | 2 |
| Projection | 3 x 360° lines |
| Working range | up to 60 m (radius) |
| Accuracy | ± 0.3 mm/m* |
| Self-levelling range | ± 4° |
| Power supply | 4 x 1.5 V LR6 (AA) |
| Weight | 0.8 kg |
| Scope of delivery | Carrying case, pouch, target plate, 4 x AA battery |



- Accessories**
- LR 7
 - Mounting Clamp
 - BM 1
 - BT 150
 - BT 150-5/8"
 - BT 350
 - Laser Glasses Green
 - Target Plate


GLL 3-80 CG PROFESSIONAL

Green Line Laser with Superior Visibility in 3 x 360° - Simply Connected



350 pts
IP 54

| Technical Specifications | |
|--------------------------|--|
| Part number | 0 601 063 U80 |
| Laser class | 2 |
| Projection | 3 x 360° lines |
| Working range | up to 120 m (radius) |
| Accuracy | ± 0.2 mm/m* |
| Self-levelling range | ± 4° |
| Power supply | 4 x 1.5 V LR6 (AA) / 12 V Li-Ion / 10.8 V Li-Ion |
| Weight | 0.9 kg |
| Scope of delivery | Carrying case, BM 1, ceiling plate, pouch, target plate, AAA, 4 x AA battery |



- Accessories**
- LR 7
 - Mounting Clamp
 - BM 1
 - BT 150
 - BT 150-5/8"
 - BT 350
 - Laser Glasses Green
 - Target Plate
 - 12 V Li-Ion
 - 10.8 V Li-Ion






GIS 500 PROFESSIONAL

Press and Go - Temperature on Hand



20 pts

| Technical Specifications | |
|--------------------------|-------------------------|
| Part number | 0 601 083 480 |
| Laser class | 2 |
| Measuring range | -30 °C – +500 °C |
| Measuring accuracy | ± 1.8 °C* (0 to 100 °C) |
| Power supply | 2 x 1.5 V LR6 (AA) |
| Weight | 0.2 kg |
| Scope of delivery | Pouch, 2 x AA battery |



GIS 1000 C PROFESSIONAL

All-round Thermo Detector for Precise and Versatile Measurements



180 pts

| Technical Specifications | |
|--|---|
| Part number | 0 601 083 3K1 |
| Laser class | 2 |
| Measuring range | -40 °C – +1000 °C |
| Measuring accuracy | ± 1.0 °C* (0 to 100 °C) |
| Measuring accuracy (relative humidity) | ± 2 % |
| Power supply | 4 x 1.5 V LR6 (AA) / 12 V Li-Ion / 10.8 V Li-Ion |
| Weight | 0.6 kg |
| Scope of delivery | Carrying bag, AA 1, micro-USB cable, 4 x AA battery |



Accessories

- AA 1
- 12 V Li-Ion
- 10.8 V Li-Ion

GTC 400 C PROFESSIONAL

Detailed Visualization of Temperature Differences



750 pts

| Technical Specifications | |
|--------------------------|---|
| Part number | 0 601 083 150 |
| Measuring range | -10 °C – +400 °C |
| Measuring accuracy | ± 3.0 °C* (0 to 100 °C) |
| No. of measuring points | 19,200 |
| Field of view (FOV) | 53 x 43° |
| Power supply | 4 x 1.5 V LR6 (AA) / 12 V Li-Ion / 10.8 V Li-Ion |
| Weight | 0.5 kg |
| Scope of delivery | Carrying bag, AA 1, hand strap, micro-USB cable, 4 x AA battery |



Accessories

- AA 1
- 12 V Li-Ion
- 10.8 V Li-Ion



THERMO DETECTOR

WALLSCANNER


GMS 120 PROFESSIONAL

Simple and Intuitive – Logical Favourite for Locating Objects Effectively



30
40 pts

| Technical Specifications | |
|--------------------------|-----------------------------------|
| Part number | 0 601 081 000 |
| Max. detection depth | 120 mm |
| Detection materials | metal, live cable, stud |
| Power supply | 1 x 9 V 6LR61 |
| Weight | 0,3 kg |
| Scope of delivery | Pouch, hand strap, 1 x 9V battery |

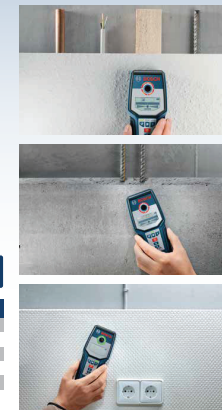


D-Tect 120 PROFESSIONAL

Spot On All Common Objects



30
120 pts

| Technical Specifications | |
|--------------------------|--|
| Part number | 0 601 081 3K0 |
| Max. detection depth | 120 mm |
| Detection materials | metal, cable, water-filled plastic pipe, stud |
| Power supply | 4 x 1.5 V LR6 (AA) / 12 V Li-Ion / 10.8 V Li-Ion |
| Weight | 0,5 kg |
| Scope of delivery | Carrying bag, AA 1, 4 x AA battery |



Accessories

- AA 1
- 12 V Li-Ion
- 10.8 V Li-Ion

D-Tect 150 SV PROFESSIONAL

Spot On All Common Objects











30
360 pts

| Technical Specifications | |
|--------------------------|---|
| Part number | 0 601 010 008 |
| Max. detection depth | 150 mm |
| Detection materials | Plastic pipes, cable of all kinds, ferrous/non-ferrous, metal, wood, cavities |
| Power supply | 4 x 1.5 V LR6 (AA) |
| Weight | 0,7 kg |



ACCESSORIES PAGE

| Laser Receiver / Remote Control | Part number | Working range | Accuracy | Power supply | Weight | Suitable for | |
|---|---------------------------|---------------|----------------|--|-------------------------|--------------|--|
|  | LR 5 | 0 601 069 700 | 0 – 40 m | ± 1 mm | 1 x 9 V 6LR61 | 0.1 kg | GLL 5-40 E, GLL 8-40 E |
|  | LR 6 | 0 601 069 G80 | 5 – 50 m | ± 1 mm / ± 3 mm (fine / rough) | 2 x 1.5 V LR03 (AAA) | 0.1 kg | GLL 5-50 X, GLL 3-80 |
|  | LR 7 | 0 601 069 H00 | 5 – 50 m | ± 1 mm / ± 3 mm (fine / rough) | 2 x 1.5 V LR6 (AA) | 0.2 kg | GLL 5-50 X, GLL 3-60 XG, GLL 3-80, GLL 3-80 CG, GCL 2-50 CG |
|  | LR 45 | 0 601 069 L00 | up to 300 m | ±1mm/±2mm/ ±3mm/±5mm/ ±7mm/±10mm | 2 x 1.5 V LR6 (AA) | 0.3 kg | GRL 300 HVG, GRL 350 HV, GRL 400 H |
|  | Receiver Mounting Bracket | 1 608 M00 70F | nil. | nil. | nil. | 0.1 kg | LR 1, LR 1 G |
|  | Receiver Mounting Bracket | 1 608 M00 C1L | nil. | nil. | nil. | 0.1 kg | LR 6, LR 7 |
|  | RC 2 | 0 601 069 C00 | up to 20 m | nil. | 1 x 1.5 V LR6 (AA) | 0.1 kg | RM 3 |
|  | RM 3 | 0 601 092 800 | nil. | nil. | nil. | 0.5 kg | GCL 2-50 CG |
|  | BM 1 | 0 601 015 A01 | nil. | nil. | nil. | 0.5 kg | GCL 2-15 G, GCL 2-50 CG, GLL 3-60 XG, GLL 3-80 , GLL 3-80 CG |
|  | BA 3.7V 1.0 Ah | 1 608 M00 C5D | nil. | nil. | nil. | 0.1 kg | GLM 50-23 G, GLM 50-27 CG |
|  | AA 1 Battery Adaptator | 1 608 M00 C18 | nil. | nil. | nil. | 0.1 kg | GCL 2-50 CG, GLL 3-80 CG, GIS 1000 C, GTC 400 C, D-tect 120, D-tect 200 C, GIC 120 C |

| Tripod | | Part number | Working range | Tripod thread | Section | Weight | Suitable for |
|---|-------------|---------------|---------------|---------------|---------|--------|--|
|  | BT 150 | 0 601 096 B00 | 55 – 157 cm | 1/4" | nil. | 1.3 kg | GLM 400, GLM 500, GLM 50-23 G, GLM 50-27 CG, GLM 100-25 C, GLM 150-27 C, GLM 150 C, GPL 3 G, GPL 5 G, GCL 2-15 G, GCL 2-50 CG, GLL 1 P, GLL 30 G, GLL 3-60 XG, GLL 3-80, GLL 3-80 CG |
|  | BT 150-5/8" | 0 601 096 C80 | 55 – 157 cm | 5/8" | nil. | 1.1 kg | GCL 2-15 G, GCL 2-50 CG, GLL 3-15 X, GLL 5-50 X, GLL 5-40 E, GLL 8-40 E, GLL 3-60 XG, GLL 3-80, GLL 3-80 CG |
|  | BT 160 | 0 601 091 200 | 97 – 160 cm | 5/8" | nil. | 4.1 kg | GOL 26 D, GOL 32 D, GRL 300 HVG, GRL 350 HV, GRL 400 H, GRL 600 CHV |
|  | BT 170 HD | 0 601 091 300 | 107 – 165 cm | 5/8" | nil. | 5.5 kg | GOL 26 D, GOL 32 D, GRL 300 HVG, GRL 350 HV, GRL 400 H, GRL 600 CHV |
|  | BT 300 HD | 0 601 091 A00 | 122 – 295 cm | 5/8" | nil. | 7.2 kg | GOL 26 D, GOL 32 D, GRL 300 HVG, GRL 350 HV, GRL 400 H, GRL 600 CHV |
|  | BT 350 | 0 601 015 B00 | 140 – 350 cm | nil. | 3 | 2.5 kg | GCL 2-15 G, GCL 2-50 CG, GLL 3-60 XG, GLL 3-80 , GLL 3-80 CG |
|  | GR 240 | 0 601 094 100 | 2.4 m | nil. | 2 | 1.4 kg | GOL 26 D, GOL 32 D, GCL 2-50 CG, GLL 5-50 X, GLL 3-60 XG, GLL 3-80, GLL 3-80 CG, GRL 300 HVG, GRL 350 HV, GRL 400 H, GRL 600 CHV |
|  | GR 500 | 0 601 094 300 | 5.0 m | nil. | 5 | 2.0 kg | GOL 26 D, GOL 32 D, GRL 300 HVG, GRL 350 HV, GRL 400 H, GRL 600 CHV |



BOSCH

Home & Garden





| | Easy Aquatak 100 (0 600 800 ELO) | Easy Aquatak 110 (0 600 8A7 FLO) | Universal Aquatak 125 (0 600 8A7 ALO) |
|--|---|---|--|
|--|---|---|--|

| | | | |
|----------------------|-----------|-----------|-----------|
| Pressure (bar) | 100 | 110 | 125 |
| Flow Rate (l/h) | 300 | 330 | 360 |
| Motor Power (W) | 1,100 | 1,300 | 1,500 |
| Max. Pressure (bar) | 100 | 110 | 125 |
| Max. Temp (°C) | 40 | 40 | 40 |
| Voltage (V) | 220 / 240 | 220 / 240 | 220 / 240 |
| Frequency (Hz) | 50 / 60 | 50 / 60 | 50 / 60 |
| Weight (Kg) | 3.0 | 3.8 | 6.8 |
| Hose (m) | 3 | 3 | 5 |
| Self-priming Capable | Yes | Yes | Yes |

- Accessories Inside Package
- Bosch 360 Gun
 - High Pressure Detergent Nozzle (350ml)
 - 3m Hose

- Rotary nozzle
- Variable nozzle
- High Pressure Detergent Nozzle (450ml)
- Water Filter
- High Pressure Gun
- Lance
- High Pressure Hose 3m

- Trio nozzle
- Clear New Water Filter
- High Pressure Detergent Nozzle (450ml)
- Bosch Gun
- Standard Lance
- High Pressure Hose 5m



VERSAL

ADVANCED (Induction motor)



Universal Aquatak 130 (0 600 8A7 BL0)

Advanced Aquatak 140 (0 600 8A7 DL0)

Advanced Aquatak 150 (0 600 8A7 7L0)

130

140

150

380

450

500

1,700

2,100

2,200

130

140

150

40

40

40

220 / 240

220 / 240

220 / 240

50 / 60

50 / 60

50 / 60

7.8

17.6

22.5

6

8

8

Yes

Yes

Yes

- Trio nozzle
- Rotary nozzle
- Water Filter
- High Pressure Detergent Nozzle (450ml)
- Bosch Gun
- Standard Lance
- High Pressure Hose 6m Length

- High Pressure Detergent Nozzle (550ml)
- Water Filter
- Bosch Gun
- Variable Fan Jet
- Rotatory Nozzle
- Standard Lance
- 8m PU High Pressure Hose

- High Pressure Detergent Nozzle (550ml)
- 60 ° Fixed Fan Jet nozzle
- Variable Fan Jet Lance
- Standard Lance
- Hose 8m (Steel armed)
- Cable 5m
- Bosch Gun
- High Pressure Hose Reel
- Roto Lance



Accessories Kit For BOSCH Easy & Universal Aquatak

Universal x Home & Car Kit (F 016 800 611)

The Car & Home Bundle for your patio and car cleaning



Scope of supply



Inside the Box

Usage

Wash brush

Agitates tougher dirt, soft bristles suitable even for delicate surfaces i.e. Windows & Cars

90° nozzle

Great for cleaning wheel arches and hard to reach areas i.e. Gutters

Patio Cleaner

Comfortable and efficient patio cleaning, ideal for larger Patio areas for quicker less time consuming cleaning.

*Not applicable for 360 degree gun (F016 800 536)

Universal x 360° Cleaning Kit (F 016 800 612)

The 360° Bundle for all cleaning needs



Scope of supply



Inside the Box

Usage

Extention hose

Allows wider reach around your home or distance from water / electricity source

Microfibre cloth

For the finishing touch i.e. Polishing car

360° Gun

Ideal for all other task around your home and for your Cars & Bikes, rotating nozzle reaches difficult areas & one handed operation offers more stability with smaller/lighter items i.e wheely bins, garden furniture etc.

Universal x Car Cleaning Kit (F 016 800 572)

The Car Bundle for your car cleaning needs



Scope of supply



Inside the Box

Usage

Wash brush

Agitates tougher dirt, soft bristles suitable even for delicate surfaces i.e. Windows & Cars

Extention hose

Allows wider reach around your home or distance from water / electricity source

90 degree nozzle

Great for cleaning wheel arches and hard to reach areas i.e. Gutters

Microfibre cloth

For the finishing touch i.e. Polishing car

*Not applicable for 360 degree gun (F016 800 536)

High Pressure Cleaner Accessories

Rotary Nozzle
(F 016 800 580)



- Aquatak 110, 120, 125, 130 and AQT 42-13



90° Nozzle
(F 016 800 581)



- Aquatak 110, 120, 125, 130, AQT 42-13 and 45-14 X



Trio Nozzle
(F 016 800 583)



- Aquatak 110, 120, 125, 130 and AQT 42-13



Vario Fan Jet Nozzle
(F 016 800 582)



- Aquatak 110, 120, 125, 130 and AQT 42-13



450ml Detergent Nozzle
(F 016 800 509)



- All AQT range



Bosch 360° Gun
(F 016 800 536)



- Aquatak 100, 110, 120, 125, 130



AquaSurf 250 Patio Cleaner
(F 016 800 486)



- Aquatak 110, 120, 125, 130



Suction Nozzle
(F 016 800 356)



- Aquatak 110, 120, 125, 130, AQT 42-13 45-14 X and 150



Wash Brush
(F 016 800 359)



- Aquatak 110, 120, 125, 130, AQT 42-13 45-14 X and 150



Water Filter
(F 016 800 577)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



Self-Priming Kit (with Filter)
(F 016 800 421)




- All AQT range



Drain Pipe Cleaner 10 m
(F 016 800 362)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13

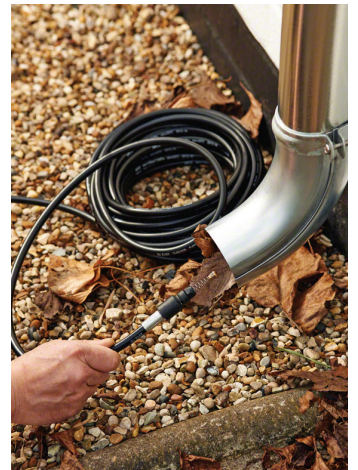

High Pressure Hose 6 m
(F 016 800 360)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



Extension Hose 6 m
(F 016 800 361)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



Adaptor for Karcher Accessories
(F 016 800 575)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



Grass Shear

Easy Shear
(0 600 833 300)



| Capacity | |
|----------------------------------|---------------------|
| Battery Type | : Lithium-ion |
| Battery Voltage | : 3.6 V |
| Works with battery capacity | : 1.5 Ah |
| No-load runtime | : Up to 40 mins |
| Battery charge time | : 3 h |
| Shrub blade length (cm) | : 12 cm |
| Grass shear width (cm) | : 8 cm |
| Tooth spacing | : 8 mm |
| Area cut per battery charge, max | : 22 m ² |
| Weight (g) | : 530g |



Lawn Mower

AHM 38 G
(0 600 886 103)



| Capacity | |
|--------------------|---------------------|
| Min Cutting Height | : 15 mm |
| Cutting Height | : 15 - 43 mm |
| Cutting Width | : 38 cm |
| Blade | : 5 Bladed Cylinder |
| Roller | : Yes |
| Self Propelling | : No |
| Fuel Type | : Hand Push |
| Product Dimensions | |
| (L x W x H) | : 540 x 490 x 380mm |
| Grass Box Capacity | : 25 Litres |
| Grass Box P/N | : 0 600 886 160 |
| Weight | : 7.5 kg |



Grass Collection Box
(0 600 886 160)

Grass Trimmer

Easy GrassCut 23
(0 600 8C1 H71)



| Capacity | |
|-----------------|---------------------|
| Motor Power | : 280 W |
| Cutting Size | : 23 cm |
| Cutting System | : Semi-auto Spool |
| Cutting Speed | : 12.500 rpm |
| Spool | : 1.6 mm x 4 m |
| Spool P/N | : F016800569 |
| Weight | : 2.0 kg |
| Tool Dimensions | |
| (L x W x H) | : 790 x 263 x 902mm |
| Weight Packed | : 2.6 kg |



Cutting Spool
(F 016 800 569)

Lawn Mower

Rotak 32-12 (Corded)
(0 600 8A6 078)



| Capacity | |
|-----------------------------|----------------------|
| Motor | : Powerdrive |
| Motor Power | : 1.200 W |
| Torque | : 13 Nm |
| Cutting Height | : 20 – 60 mm; 3-fold |
| Grass Combs | : Yes |
| Grass Box Capacity | : 31 L |
| Handle Type | : Standard |
| Integrated carrying handles | : No |
| Cutting System | : Rotary Blade |
| Power Cable | : 10m |
| Blade Width | : 32 cm |
| Blade P/N | : F 016 800 340 |
| Weight | : 6.8 kg |



Replacement Blade for Rotak 32-12
(F 016 800 340)

Workbench

PWB 600
0 603 B05 200



| Capacity | |
|-----------------------------|-----------|
| Weight | : 11.6 kg |
| Load Bearing capacity, max. | : 200 kg |
| Height of Work bench | : 834 mm |
| Width of Work bench | : 680 mm |
| Length of Work bench | : 680 mm |



Easy Prune
0 600 8B2 140



| Capacity | |
|-------------------------------|---------------|
| Battery Voltage | : 3.6 V |
| Battery Charge Time | : 3.5 h |
| Cuts per Battery charge up to | : 450 |
| Weight | : 0.49 kg |
| Battery Type | : Lithium-Ion |
| Tool Dimension (length) | : 250 mm |
| Tool Dimension (height) | : 85 mm |
| Cutting Capacity up to | : 25 mm |
| Tool Dimensions (width) | : 31 mm |
| Cutting System | : Bypass |



Air Pump

Air pump
0 603 947 080



| Capacity | |
|-------------------------|------------|
| Tool Diemions (length) | : 49.2 mm |
| Weight | : 0.43 kg |
| Max. Output volume | : 10 l/min |
| Max. Ah | : 3 Ah |
| Hose Length | : 0.24 m |
| Max. Pressure | : 10,3 bar |
| Battery Voltage | : 3.6 V |
| Tool Dimensions (width) | : 215 mm |
| Max. Pressure | : 1030 kPa |
| Tool Diemions (height) | : 106 mm |
| Max. Pressure | : 150 psi |



| | | |
|---|---|------|
| = | 5x | 2:43 |
| | car tire (205/55 R16) 2.0-2.5 Bar | |
| = | 6x | 2:08 |
| | tracking wheel (28x1.5 700x38C) 0-4.5 Bar | |
| = | 38x | 0:55 |
| | football size 5 0-0.8 Bar | |




Brush


Power Scrubber Universal Brush
0 603 3E0 050



| Capacity | |
|--------------------------|-----------|
| Tool Dimensions (length) | : 140 mm |
| Weight | : 0,33 kg |
| No-load Speed | : 215 rpm |
| Battery Voltage | : 3,6 V |
| Tool Dimensions (width) | : 45 mm |
| Tool Dimensions (height) | : 100 mm |
| IP protection type | : IPX5 |
| Battery Capacity | : 2 Ah |

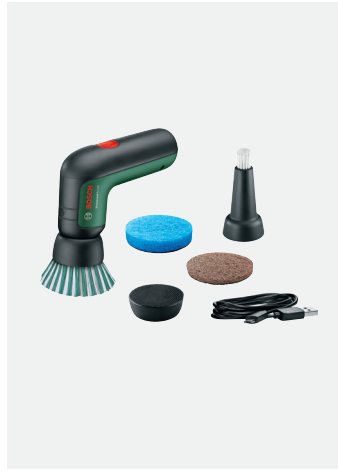

Green kitchen scour pad X3
1 600 A02 3L0



Bristle brush
1 600 A02 3KW



Brown heavy duty pad X3
1 600 A02 3L1



Brush pad holder
1 600 A02 3KX




White melamine eraser X3
1 600 A02 3L2



Brush detailed brush
1 600 A02 3KY



Microfibre non-scratch pad X3
1 600 A02 3KZ

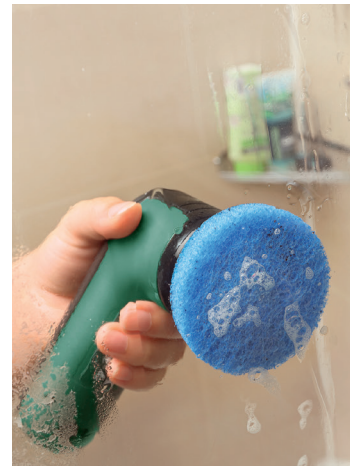



Warranty

This serves to inform you that **all Bosch Power Tools are guaranteed against manufacturing defects for a period of 12 months** from the registered date of purchase (**Bosch Measuring Tools, GHP Range High Pressure Washer, HEAVY DUTY Range Power Tools, Bosch Range Power Tools, Bosch Hot Air Gun, Bosch Batteries and Bosch Charger are entitled to 12 months warranty. Bosch Aquatak High Pressure washer and Garden Tools are entitled to 6 months warranty. Term and Conditions apply**). For the same defect repair within warranty period, a maximum 3 times warranty repair are allowed for Bosch Power Tools, 2 times for Bosch Measuring Tools and Bosch Home & Garden Tools. This guarantee, however, does not cover damage caused by accident, misuse, unauthorized repairs, tampering, normal wear & tear, additions and modifications made to the tool in any manner. In case of complaint, please send the tool, undismantled together with official proof of purchase, i.e. tax invoice or receipt stated with tool's serial no., to Bosch Power Tools Authorised Service Centre.





































Jaminan

Dimaklumkan bahawa tempoh jaminan untuk **Alat-alat kuasa Bosch akibat kecacatan product semasa pengilangan adalah terhad kepada 12 bulan sahaja** bermula dari tarikh pembelian (**Alat Pengukur Bosch, Siri Pencuci Tekanan Tinggi GHP Bosch, Siri HEAVY DUTY Alat-alat Kuasa Bosch, Alat-alat Kuasa Bosch Range, Alat Pengering Bosch, Bateri Bosch dan Pengecas Bateri Bosch Produk tempoh jaminannya 12 bulan. Pembersih tekanan tinggi dan Alat Kebun Tempoh Jaminannya 6 bulan. Tertakluk kepada Terma and Syarat**). Jumlah maksimum pembaikan dalam tempoh jaminan adalah terhad kepada 3 kali sahaja untuk Alat-alat kuasa Bosch, 2 kali sahaja untuk Alat-alat Pengukur Bosch dan Alat-alat Kuasa Halaman Bosch. Tempoh jaminan ini tidak termasuk kerosakan akibat kemalangan, penyalahgunaan, membaikpulih yang tidak diakui, haus yang sepatut ada dan pengubahsuaian yang mengakibatkan kerosakan Alat-alat kuasa tersebut. Bagi sebarang pengaduan, sila hantar Alat-alat Kuasa dan tax inouis rasmi atay resit rasmi sebagai bukti pembelian yang dilengkapi dengan nombor siri Alat-alat Kuasa ke Pusat Servis Alat-alat Kuasa Bosch Yang Sah.

保证

谨此通知，有关所有博世电动工具享有为期12个月之生产损坏保证，有效期由购买登记日算起（博世测量仪器，博世GHP 高压清洗系列，博世 HEAVY DUTY系列产品，博世系列电动工具，博世热风机，博世电池及博世充电器享有12个月保证。高压清洗机和园林工具享有6个月保证。须符合条规）。在维修保证期间，博世电动工具享有高达三次维修服务，而博世测量仪器及博世家园电动工具则享有两次维修服务。上述保证并不包括有关电动工具因意外、错误使用、非授权维修、正常的磨损、附加及交换或其他方式所造成的损坏及故障。若有任何投诉，请将阁下完整的电功工具和购买税务发票或付款收据及具备电功工具编号交到您的博世电动工具授权维修中心。


Key To Symbols

| | | | | | | |
|---|--|--|--|---|---|--|
|  Electronic Control |  Rotation Stop |  Constant Electronic |  Forward / Reverse Rotation |  Overload Clutch |  Slim Grip |  Inox For a perfect finish on stainless steel |
|  Spindle Lock |  Saw Blade Pendulum Action |  Dust Extraction |  Bosch SDS System |  SDS-Plus Tool Holder |  Fine Depth Adjustment |  Distortion-resistant protective guard |
|  SDS-Max Tool Holder |  SDS-Plus Quick Exchange System |  Bosch SDS SDS-Clic Quick Clamping System |  Velcro Fastening |  EASY-FIT Easy Fit |  KICK BACK STOP Kick Back Stop |  TURBO BLOWER Turbo Blower |
|  Removable Cable |  Torque Control |  Restart Protection |  Direct Cooling and Additional Air Inlets |  Brushless EC Motor |  Restart Protection |  Intelligent Brake System |
|  Drop Control |  Vibration Control |  AUTO LOCK Auto-Lock |  WOOD RAZOR Woodrazor |  TURBO POWER Turbo Power |  LASER Class 2 |  LASER Class 3R |
| | | | | |  X-LOCK | |

While all care has been taken to ensure that the information contained in this publication is correct, no responsibility can be accepted for any inaccuracy. The Company reserves the right to alter or modify the information contained herein at any time in light of technical or other developments. Technical specification are valid under normal operating condition only. The company does not accept any responsibility for any misuse of the product and cannot be held liable for consequential damage.



Authorised Service Centres

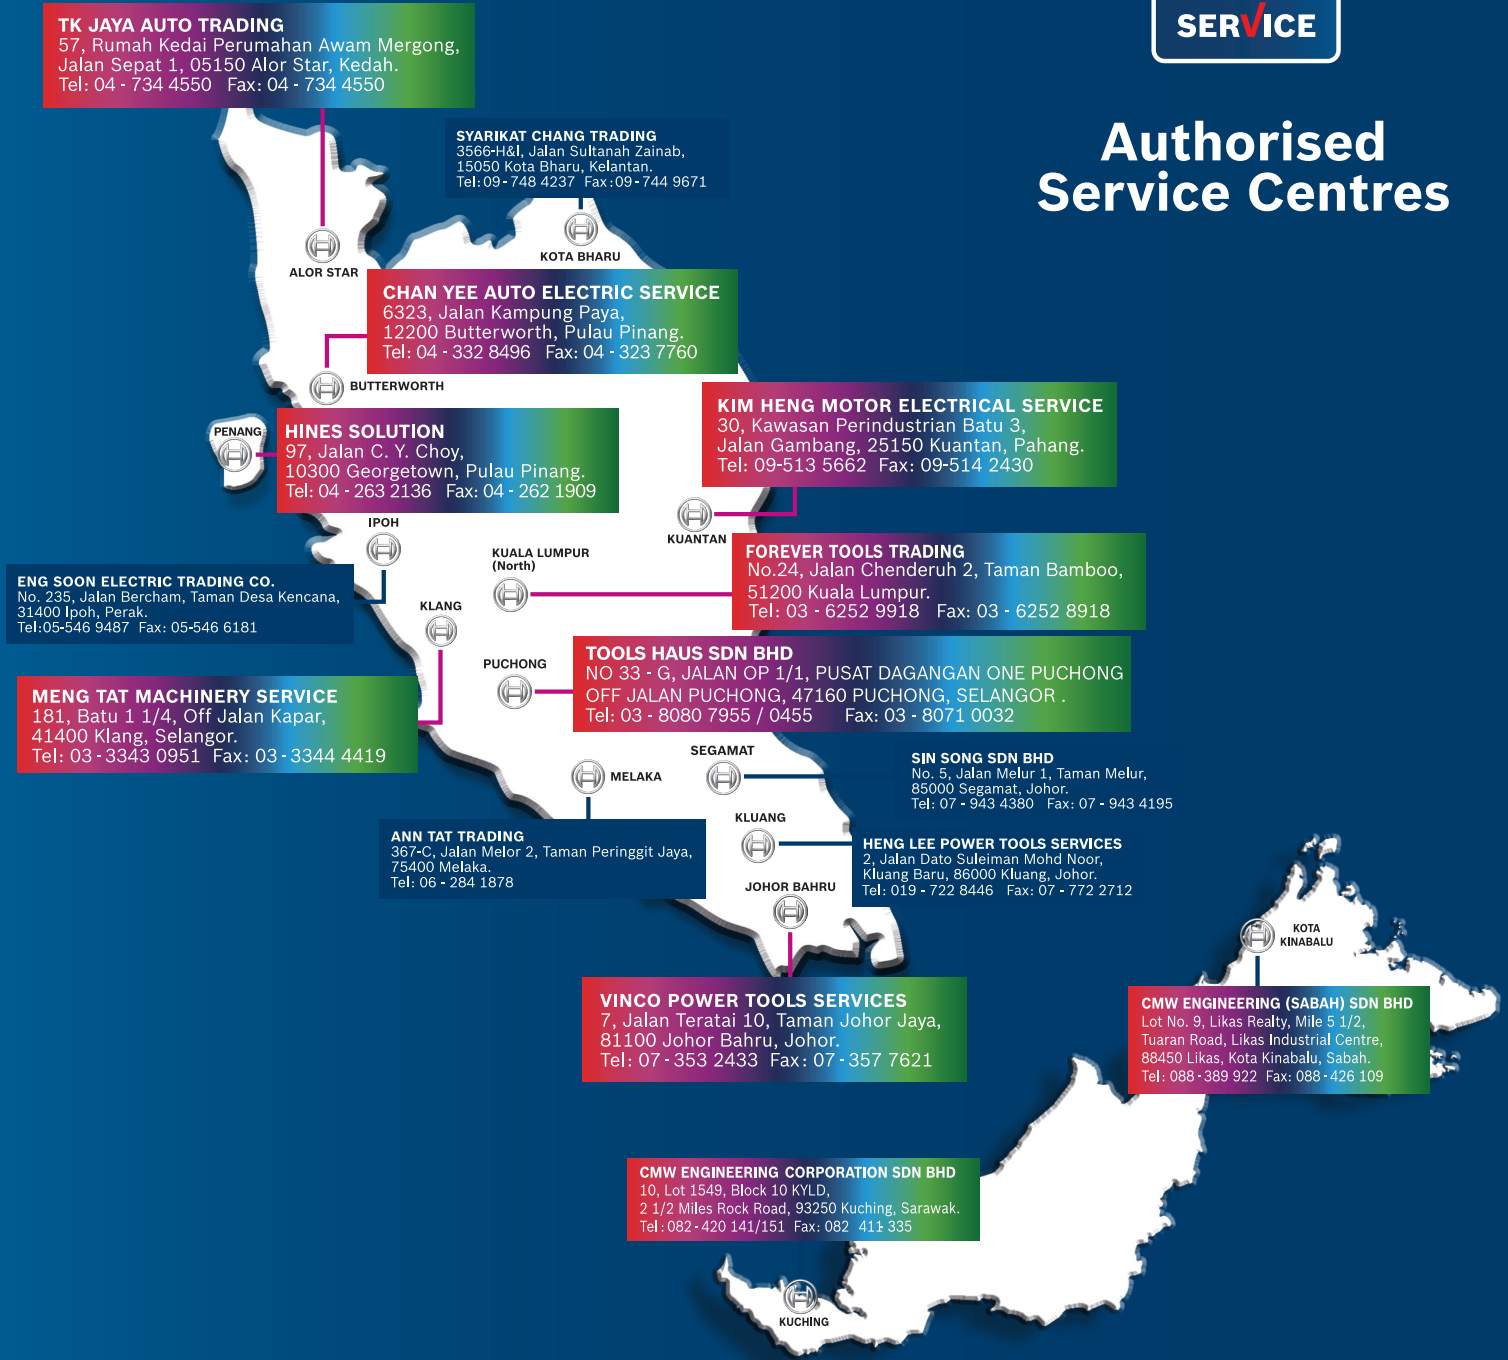

Visit our nearest Authorised Service Centre to service your Bosch Power Tools and to purchase tools spare parts.

Robert Bosch Sdn Bhd (220975-V)
No. 8A, Jalan 13/6, 46200 Petaling Jaya, Selangor Darul Ehsan, Malaysia.
Tel: +603 - 7966 3000 Fax: +603 - 7958 3838
www.bosch-pt.com.my

 Bosch Service Concept Stores

While all care has been taken to ensure that the information contained in this publication is correct, no responsibility can be accepted for any inaccuracy. The Company reserves the right to alter or modify the information contained herein at any time in light of technical or other developments. Technical specification are valid under normal operating condition only. The company does not accept any responsibility for any misuse of the product and cannot be held liable for consequential damage.

For further enquiries, please contact



Bosch Professional Power Tools and Accessories



Boschptmy



1 800 880 188

Mon - Fri 9am - 6pm