



PRO

GVF18VH-1300


Robert Bosch Power Tools GmbH
70538 Stuttgart
GERMANY

www.bosch-pt.com

1 609 92A G9Z (2026.06) PS / 13



1 609 92A G9Z

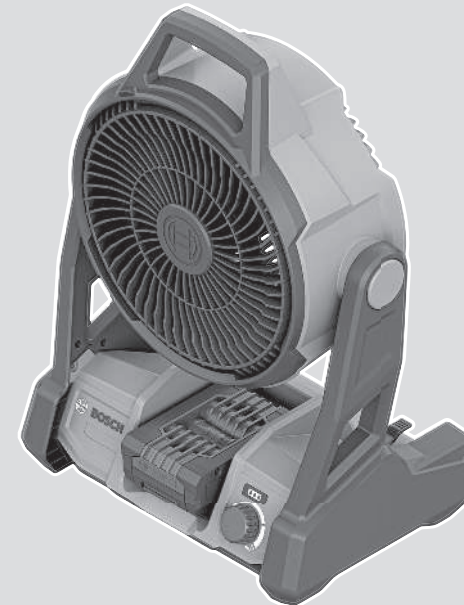



zh 原始使用說明書











繁體中文.....	頁 6
-----------	-----



<https://eu-doc.bosch.com/>

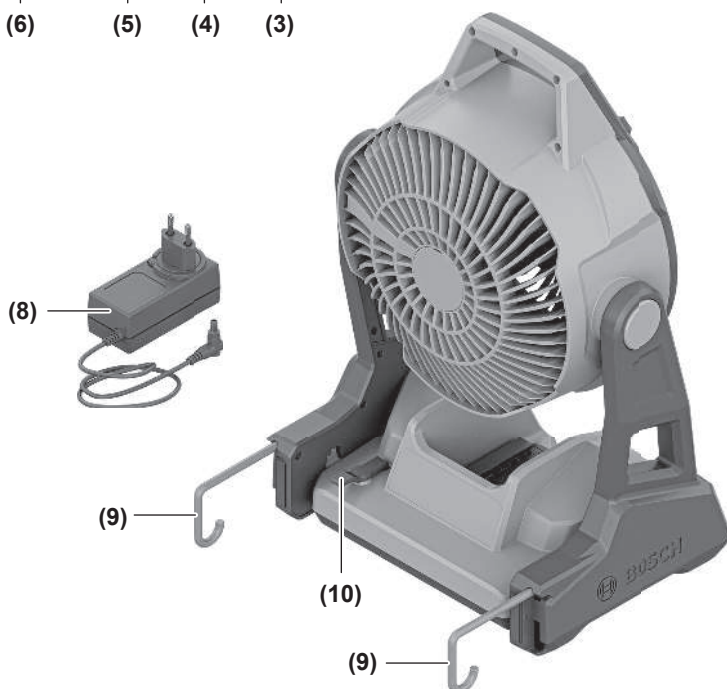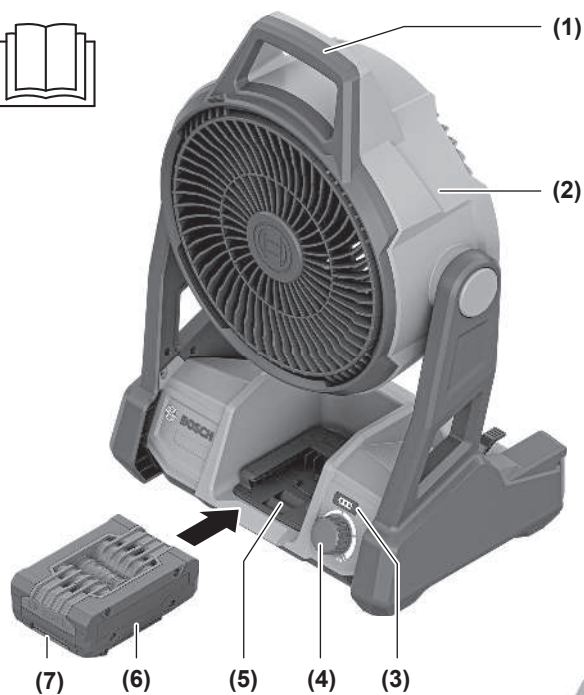

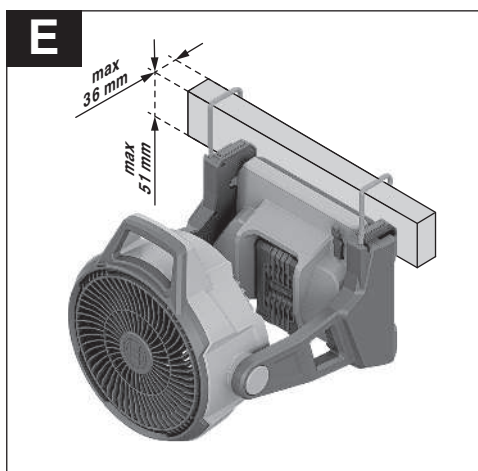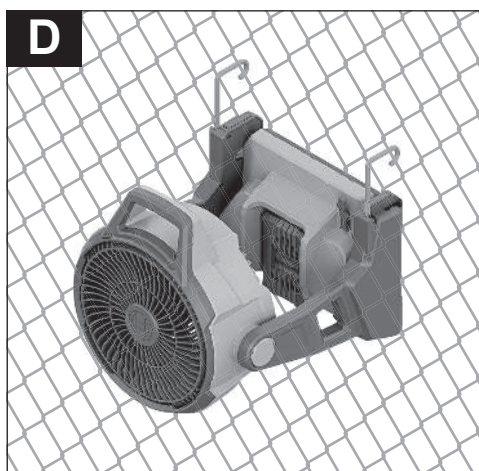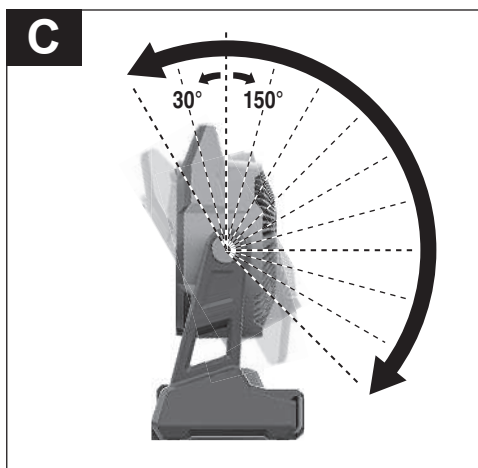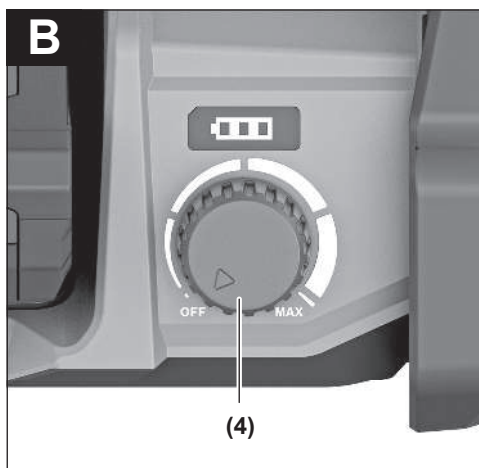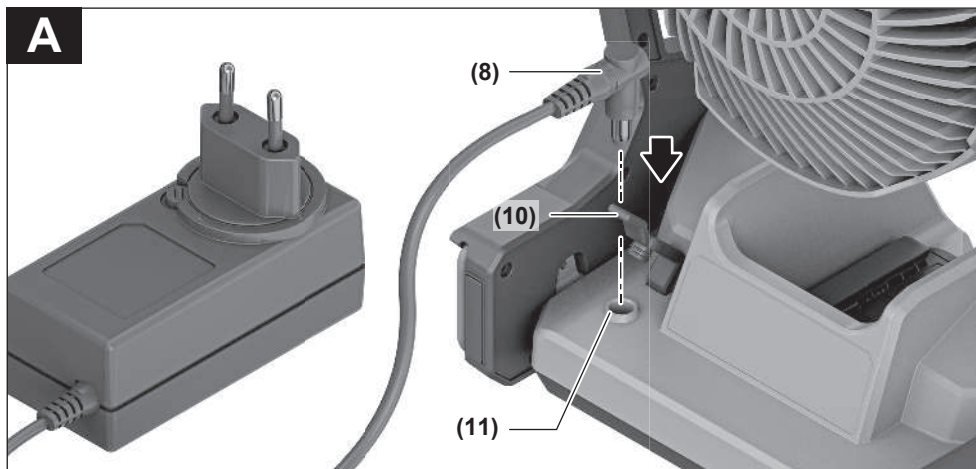

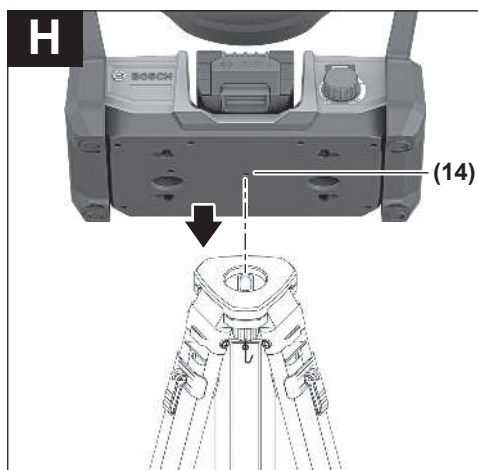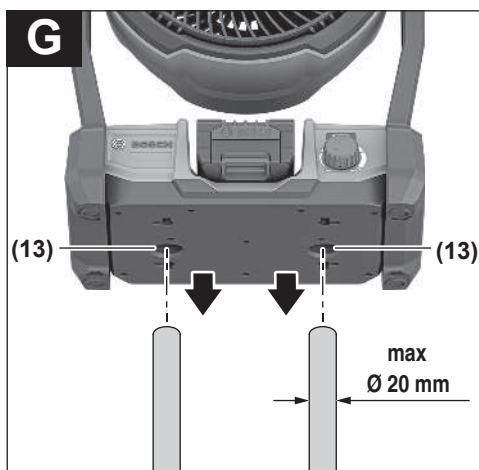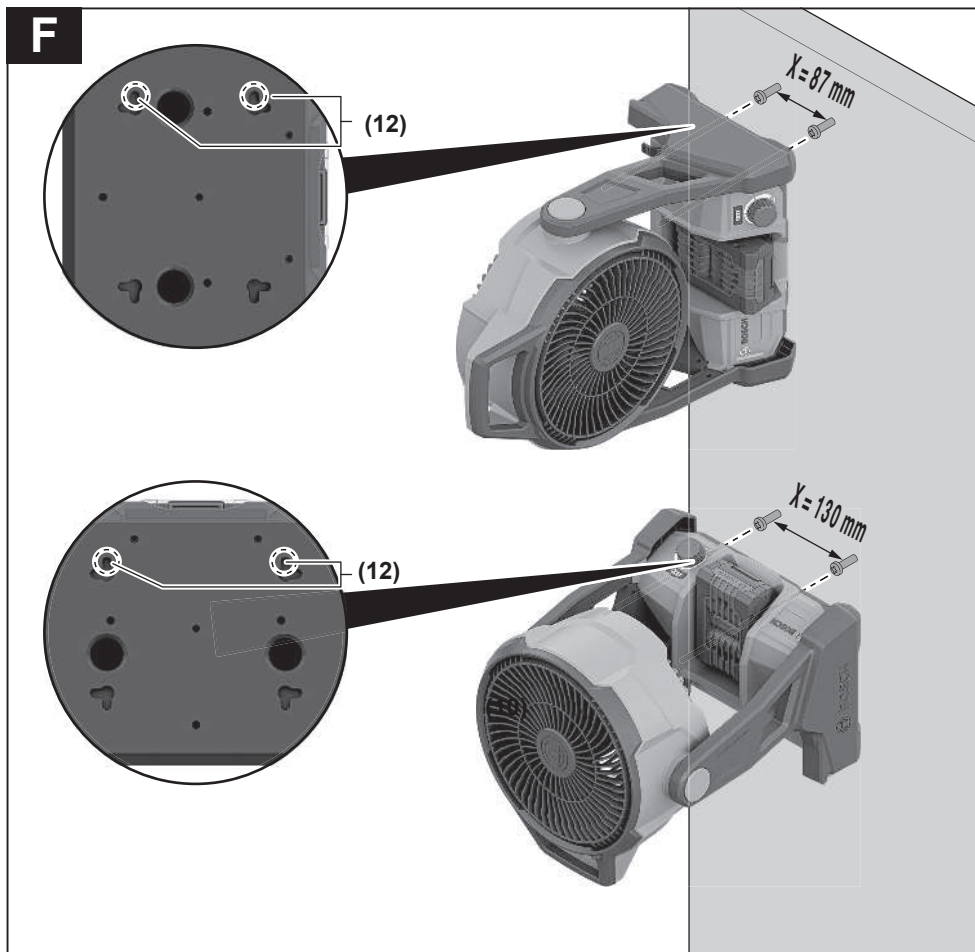

繁體中文

安全注意事項



請詳讀所有安全注意事項和指示。如未遵守安全注意事項與指示，可能導致火災、人員遭受電擊及 / 或重傷。

請妥善保存所有安全注意事項與指示，以供日後查閱之用。

- ▶ 請留意兒童的安全。如此才能確保他們未將本風扇或充電器當做玩具任意玩耍。
- ▶ 不可在無人看照的情況下由孩童清潔及維護風扇。
- ▶ 8 歲以上兒童以及身體、感官或心智能力有缺陷，或是缺乏相關經驗及知識的人士，只要在他人的監督下或接受過如何安全處置此風扇的指導，並充份瞭解相關危險，即可使用該風扇。否則可能會造成操作上的錯誤，進而使人員受傷。
- ▶ 本風扇不適合兒童以及身體、感官或心智能力有缺陷，或是缺乏相關經驗及知識的人士使用。否則可能會造成操作上的錯誤，進而使人員受傷。
- ▶ 出風口和進氣口保持暢通，不可遮蓋任何東西。不可擋住風輪，請勿將任何物體插入旋轉中的風輪。否則風扇可能會過熱並著火。
- ▶ 請勿將任何物體插入旋轉中的風輪。否則，它們可能會斷裂、被甩掉並造成傷害。
- ▶ 請勿在明火或炙熱物品附近使用風扇。
- ▶ 不可放任風扇無人看管。
- ▶ 請勿在風扇葉輪蓋打開或損壞的情況下使用風扇。此處旋轉中的風扇輪，可能造成您受傷。
- ▶ 請僅使用隨附的電源變壓器。唯有如此才能確保風扇的安全運行。
- ▶ 風扇的連接插頭必須與插座相配。絕不可以任何方式改變插頭原始設計。未經變造的插頭以及規格相符的插座，可降低觸電風險。
- ▶ 不得將風扇暴露雨中或潮濕環境中。如果有水滲入風扇，將增加觸電風險。
- ▶ 每次使用前，請仔細檢查風扇、電線及插頭。請勿自行拆開風扇，而是應該將之交由合格的專業技師以原廠替換零件進行維修。已受損的風扇、線材和插頭，會提高觸電風險。
- ▶ 請勿將此風扇交付予不熟悉該產品或未細讀本說明書的人員來進行操作。
- ▶ 如果無法避免在潮濕環境下使用電源線操作風扇，請使用漏電斷路器。安裝漏電斷路器可避免觸電風險。
- ▶ 不得濫用電線。絕不能從電線處拖行、吊掛風扇或從該處將插頭拉出插座。電線應遠離高溫、油脂、銳利邊緣或可活動部件。受損或纏繞的電線會增加觸電危險。
- ▶ 切勿改裝拆開充電電池。可能造成短路。
- ▶ 如果充電電池損壞了，或者未按照規定使用充電電池，充電電池中會散發出有毒蒸氣。充電電池可能起火或爆炸。工作場所必須保持空氣流通，

如果身體有任何不適必須馬上就醫。充電電池散發的蒸氣會刺激呼吸道。

- ▶ 不當使用或充電電池受損時，充電電池可能會流出可燃液體。請避免接觸。意外沾到時，請用水徹底沖洗。如果液體跑進眼睛裡，請進一步就醫。從電池中滲出的液體可能造成腐蝕或起火。
- ▶ 尖銳物品（例如釘子或螺絲起子）或是外力皆有可能造成充電電池損壞。進而導致內部短路而發生電池起火、冒煙、爆炸或過熱等事故。
- ▶ 充電電池不使用時，請讓它遠離迴紋針、硬幣、鑰匙、釘子、螺釘或其他小金屬物體，以免造成兩極相接。電池端點短路會引起燃燒或火災。
- ▶ 僅可使用產品的原廠充電電池。如此才可依照產品提供過載保護。
- ▶ 僅能使用製造商規定的充電器進行充電。將適用於某特定電池盒的充電器用於其他電池盒時，可能會造成起火燃燒。



保護充電電池免受高溫（例如長期日照）、火焰、污垢、水液和濕氣的侵害。有爆炸及短路之虞。



- ▶ 請檢查活動部件是否運作正常而且未被卡住；或者是否有部件破損或損壞而導致風扇功能受損。使用風扇前，請修復損壞的部件。許多事故是因產品維護不善所引起。



警告！請將塑膠袋放在嬰兒和兒童接觸不到的地方。塑膠袋可能很危險。可能造成窒息危險。

產品和功率描述

請留意操作說明書中最前面的圖示。

依規定使用機器

風扇適用於在乾淨環境下進行室內和室外的通風。

插圖上的機件

- (1) 提把
- (2) 風扇頭
- (3) 充電電池電量指示器
- (4) 操作按鈕
- (5) 電池固定座
- (6) 充電電池^{a)}
- (7) 充電電池解鎖按鈕^{a)}
- (8) 電源變壓器^{a)}
- (9) 掛鉤
- (10) 電源插座護蓋
- (11) 電源連接
- (12) 安裝槽
- (13) 桿件固定座
- (14) 三腳架固定座

a) 圖文中提到的配件，並不包含在基本的供貨範圍中。

技術性數據

充電式風扇		GVF18VH-1300
產品機號		3 601 JU10..
最大風量	m ³ /h	1300
濕度範圍		非凝結
重量 ^{A)}	kg	2.8
尺寸 (長 x 寬 x 高)	mm	302 × 210 × 438

通電運轉

電源變壓器 (產品機號)		1 619 XS0 801 1 619 XS0 827 1 619 XS0 828 1 619 XS0 829 1 619 XS0 83..
連接頭		DC 插頭 (5.5 mm × 2.5 mm)
輸出電壓	V	20

電池模式

額定電壓	V=	18
充電狀態下的建議環境溫度	°C	0 ... +35
運作時的容許環境溫度 ^{B)}	°C	0 ... +50
存放狀態下的容許環境溫度 (風扇)		-20 ... +70
存放狀態下的容許環境溫度 (充電電池)		-20 ... +50
相容的充電電池		GBA18V... GBA 18V... ProCORE18V... EXPERT18V... EXBA18V... CORE18V...
建議使用的充電器		GAL18... GAL 18... GAL 36... GAL12V/18... GAL 12V/18... GAX 18... EXAL18...

A) 不含充電電池 (您可在 www.bosch-professional.com 找到充電電池重量)

B) 溫度 <10 °C 時，性能受限

電源供應

風扇可透過 **Bosch 18 V 鋰離子充電電池(6)** 或電源插座 **(11)** 上的電源變壓器 **(8)** 供應電源。

通電運轉 (請參考圖 A)

► 電源變壓器受損時請勿使用風扇。

► 風扇的電源透過電源供電，只要連接電源變壓器，無論是否裝入電池，均可供電。

- 打開電源插座的護蓋 **(10)**。
- 將電源變壓器 **(8)** 的電纜插入電源插座 **(11)**。
- 將電源變壓器連接電源。風扇即可運作。
- 移除電源變壓器 **(8)** 的電纜時，請關上護蓋 **(10)**，以防止髒污進入。

充電電池

Bosch 亦銷售不含充電電池的充電式風扇。可以從外包裝看出風扇的供貨範圍是否包括充電電池。

為充電電池進行充電

► 只能選用技術性數據裡所列出的充電器。僅有這些充電器適用於風扇所使用的鋰離子充電電池。

提示：由於國際運輸規定，出貨時鋰離子充電電池已部分充電。初次使用電動工具之前，請先將充電電池充飽電以確保充電電池蓄滿電力。

► 風扇自動關閉後從風扇取出充電電池。否則充電電池可能會損壞。

安裝充電電池

將已充飽電的充電電池推至充電電池固定座內，直到卡緊。

取出充電電池

若要取出充電電池，請按解鎖鈕，然後將充電電池抽出。**不可以強行拉出充電電池。**

本充電電池具備了雙重鎖定功能，即使不小心按壓了充電電池解鎖按鈕，充電電池也不會從機器中掉落出來。固定彈簧會把充電電池夾緊在機器中。

風扇上的充電電池電量指示器

按住操作按鈕數秒鐘後，風扇上的充電電池電量指示器會顯示仍可用的充電電池容量或是是否過載。

LED	容量
3 顆綠燈持續亮起	76–100 %
2 顆綠燈持續亮起	41–75 %
1 顆綠燈持續亮起	16–40 %
1 顆綠燈緩慢閃爍	0–15 %

充電電池的溫度若已超出操作溫度範圍或者過載保護已發出回應，充電電池之電量指示器的三顆 LED 會同時快速閃爍。

充電電池的電量指示器

提示：並非所有的充電電池類型都有電量指示器。

充電電池的電量指示器透過綠色 LED 燈告知充電電池的目前電量。基於安全顧慮，務必在電動工具完全靜止時才能檢查充電電池的電量。

按一下電量指示器按鈕  或 ，即可顯示目前的電量。即使已取出充電電池，此項功能仍可正常運作。

按壓電量顯示按鈕後，LED 燈若未亮起，即表示充電電池故障，必須予以更換。

充電電池型號 GBA 18V... | GBA18V...



LED	容量
3 顆綠燈持續亮起	60–100 %
2 顆綠燈持續亮起	30–60 %
1 顆綠燈持續亮起	5–30 %
1 顆綠燈呈閃爍狀態	0–5 %

充電電池型號 ProCORE18V... | EXPERT18V... | EXBA18V... | CORE18V...



LED	容量
5 顆綠燈持續亮起	80–100 %
4 顆綠燈持續亮起	60–80 %
3 顆綠燈持續亮起	40–60 %
2 顆綠燈持續亮起	20–40 %
1 顆綠燈持續亮起	5–20 %
1 顆綠燈呈閃爍狀態	0–5 %

電池缺陷風險檢測

EXPERT18V... | EXBA18V...

電池電量指示器的 LED 燈除了顯示電池的充電狀態外，還可顯示電池缺陷的風險。

要啟用此功能，請按住電量指示器按鈕 3 秒鐘。電池電量指示器上的跑動燈號會顯示電池的分析結果。結果會顯示在電池電量指示器上。

1 個 LED 燈：電池有很高的缺陷風險。效能和運作時間可能已經降低。建議更換電池。

5 個 LED 燈：充電電池狀況良好，故障風險低。

請注意：電池缺陷風險評估分為兩個階段，並提供簡化的狀況評估。顯示會被評估為狀況良好或缺陷風險增加。不會顯示電池狀況的百分比。

如何正確地使用充電電池

妥善保護充電電池，避免濕氣和水分滲入。

充電電池必須儲存在 -20 °C 至 50 °C 的環境中。夏天不可以把充電電池擱置在汽車中。

偶爾用柔軟、乾淨且乾燥的毛刷清潔充電電池的通氣孔。

充電後如果充電電池的使用時間明顯縮短，代表充電電池已經損壞，必須更換新的充電電池。請您遵照廢棄物處理相關指示。

連續工作時間

充電電池	運轉時間 [h] 在最大風量下
GBA 18V 2.0Ah	1.1
GBA 18V 5.0Ah	2.7

充電電池	運轉時間 [h] 在最大風量下
GBA 18V 15.0Ah	8.0

操作

► 在風扇上進行任何工作（例如：安裝，清潔等）以及搬運和儲存風扇之前，都必須從風扇取出**充電電池**。如果意外按下電源開關，則有受傷危險。

啟動與關閉（請參考圖 B）

- 若要啟動風扇，請順時針方向旋轉操作按鈕 **(4)**（沿旋轉方向 **MAX**）。
- 若要關閉風扇，則逆時針方向旋轉操作按鈕 **(4)**（沿旋轉方向 **OFF**），直至聽到咖噉聲）。

變更風扇速度（請參考圖 B）

- 若要增加風扇的轉速，請順時針方向旋轉操作按鈕 **(4)**（沿旋轉方向 **MAX**）。
- 若要降低風扇的轉速，請逆時針方向旋轉操作按鈕 **(4)**（沿旋轉方向 **OFF**）。

調整風扇頭方向（請參考圖 C）

風扇頭可往前傾斜最多 30°，往後最多 150°。風扇頭在翻轉範圍內共有 13 個卡入位置，可精準調整氣流方向。

- 若要調整風扇的方向，請握住風扇的提把 **(1)** 處，然後將風扇頭 **(2)** 往前或往後傾斜。

溫控的過載保護裝置

只要按照規定使用，風扇就不可能過載。萬一負載過重或充電電池的溫度已超出允許範圍，電子設備會關閉風扇，直到溫度重新回到理想操作溫度的範圍內。

固定方式

此風扇有多種懸掛和安裝方式。請選擇最適合您所在位置的選項。

- 請使用提把 **(1)**，來固定或定位風扇。

懸掛風扇

提示：風扇可懸掛在垂直或水平位置上。請注意，懸掛風扇時，應確認風扇的運行不會受阻。

懸掛在掛鉤上（請參考圖 D-E）

- 將掛鉤 **(9)** 完全從凹槽拉出。必要時旋轉掛鉤。

提示：掛鉤完全拉出後，才能旋轉。

- 將風扇懸掛在穩定處（最大深度 **36 mm**）。

懸掛在安裝槽上（請參考圖 F）

- 將兩個螺栓（螺栓頭直徑 **4 – 6 mm**）鎖入牆面，螺栓間距 **87 mm**（垂直安裝）或 **130 mm**（水平安裝）。
- 將安裝槽的中間部件 **(12)** 定位在螺栓頭上方。

- 將風扇盡量往下推，直至螺栓位於安裝槽的狹窄部件 **(12)** 內，風扇隨即固定。

安裝風扇

利用桿件固定座安裝在桿件上（請參考圖 G）

風扇可利用兩個桿件固定座 **(13)** 固定在桿件（最大直徑 **20 mm**）上。

- 將桿件固定座 **(13)** 定位在桿件上方，然後將風扇推到桿件上。

利用三腳架螺栓孔安裝在三腳架上（請參考圖 H）

使用三腳架的提示

- 安裝在三腳架上的風扇僅能採豎直位置。
- 調整三腳架支腿時請注意，三腳架應站立穩定，且中柱保持垂直。
- 請使用支承能力超過 **3 kg** 的三腳架。

將風扇安裝在三腳架上

- 將風扇三腳架固定座 **(14)** 定位在三腳架固定螺栓 **(5/8")** 上方，然後將風扇安置在固定螺栓上。

提示：請注意，風扇三腳架固定座 **(14)** 應完整位於固定螺栓上。

- 沿順時針方向將風扇轉到底，以將風扇固定在三腳架上。

維修和服務

保養與清潔

- ▶ **在風扇上進行任何工作（例如：安裝，清潔等）以及搬運和儲存風扇之前，都必須從風扇取出充電電池。**如果意外按下電源開關，則有受傷危險。

風扇請保持乾淨，以確保其良好且穩定的功能。

如果充電電池故障了，可以向博世電動工具公司授權的客戶服務中心求援。

請定期清潔風扇和通風口前的格柵。清潔頻率視使用環境和使用持續時間而定。

定期使用乾燥的壓縮空氣吹淨風扇頭內部、扇葉和馬達外殼區域。

請使用乾淨的布清潔。嚴禁使用煞車油、汽油、石油類產品或強效溶劑清潔風扇。

請勿使用塑膠製清潔布或鋼絲球進行清潔。否則可能永久損壞表面結構。

請勿使用具腐蝕性及/或磨蝕性的清潔劑來清潔風扇。否則可能損壞設備表面。

存放

存放前請取出風扇的充電電池。

將風扇存放在乾燥且陰涼的室內，並加以保護，避免直接日曬、高溫和低溫環境。

將風扇存放在原廠包裝內，以免沾染灰塵。

顧客服務處和顧客諮詢中心

台灣羅伯特博世股份有限公司

電話: (02) 7734 2588

製造商地址:

Robert Bosch Power Tools GmbH

羅伯特·博世電動工具有限公司

70538 Stuttgart / GERMANY

70538 斯圖加特/德國

當您需要諮詢或訂購備用零件時，請務必提供本產品型號銘牌上 10 位數的產品機號。

廢棄物處理



風扇、充電電池、配件和包裝應以符合環保之方式回收利用。



請勿將風扇和充電電池/拋棄式電池丟入一般家庭垃圾中！

Legal Information and Licenses

1 - Open Source Components

1.1 - CMSIS V5.9.0- Apache-2.0

Copyright (C) 2010-2021 ARM Limited or its affiliates. All rights reserved.

Licensed under the Apache License, Version 2.0 (the License); you may not use this file except in compliance with the License. You may obtain a copy of the License at

www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an AS IS BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

1.2 - AT32F011_Firmware_Library/project/at32f011_board V2.0.1 - BSD-3-Clause

Copyright (c) 2025, Artery Technology, All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

2 - Common License

2.1 - Apache License 2.0 (Apache-2.0)

Apache License

Version 2.0, January 2004

<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i)

the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

Warranty Disclaimer

This product contains Open Source Software components which underly Open Source Software Licenses. Please note that Open Source Licenses contain disclaimer clauses. The text of the Open Source Licenses that apply are included in this manual under "Legal Information and Licenses".

Servicekontakte
Service Contacts
Contacts de Service
Contactos de Servicio
Контакты сервисных центров



<https://www.bosch-pt.com/serviceaddresses>

Garantiebedingungen
Guarantee Conditions
Conditions de Garantie
Condiciones de Garantía
Условия гарантии



<https://www.bosch-pt.com/guarantee/202601>