BOSCH

POWER TOOLS PROGRAMME 2021

1st Edition Jan 2021

BOSCH

Download Now! Join BeConnected To Get Your Rewards Today!

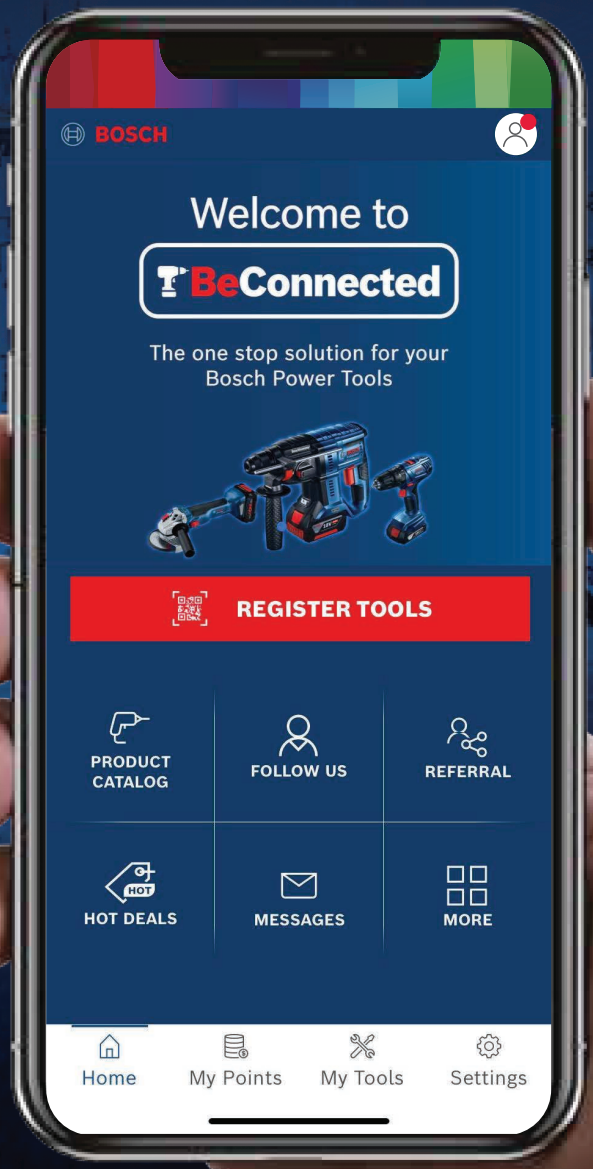

Available on the App Store

GET IT ON Google Play

SCAN ME!

扫描我!

What is BeConnected App?

Welcome to **Bosch BeConnected!** – a power-packed digital app that enables you to check on our Hot Deals, make purchases, and earn points to redeem for great rewards. Other great user-friendly features include e-warranty, product catalogue, dealers and service centres locator, instant messaging, etc. Read on to discover how to enjoy a better digital lifestyle with **Bosch BeConnected** and download the App today!

BeConnected App Features

Product Catalog
Find genuine product information, video & reviews at your convenience.

Messages
Get alerts on notification here.

Follow Us
Stay in touch with us on Facebook, Instagram, Website or contact us on our hotline.

My Points
Check total points, points used and balance points.

Referral
Invite your friends via Facebook, SMS or link to be part of BOSCH BeConnected community by downloading the app.

My Tools
Check products history and track purchase history.

Hot Deals
Check out the latest promotion and the Best Buys !

Redeem Gifts
Check gifts catalogue and redeem your favorite gifts with your points! You can check redeem history too.

How to download BeConnected App?

Step 1

Go to

Available on the App Store

or

GET IT ON Google Play

Step 2

Type

Bosch BeConnected

Step 3

Select

BeConnected BOSCH

For User

BeConnected BOSCH

For Business

Step 4

Click

Download App

12 V Li-Ion Bosch Professional

GSR 120-LI GEN 2
Cordless Drill / Screwdriver
(0 601 9G8 0L0)

***50 pts

Capacity	
Battery Voltage	: 12 / 2.0 Ah
Torque (Hard / Soft)	: 30 / 14 Nm
No-load Speed	: 0 - 400 / 0 - 1,500 rpm
Drilling	
-in Wood	: 20 mm
- in Metal	: 10 mm
Weight	: 0.97 kg

GSB 120-LI GEN 2
Cordless Impact Drill Driver
(0 601 9G8 1L0)

***50 pts

Capacity	
Battery Voltage	: 12 / 2.0 Ah
Torque (Hard / Soft)	: 30 / 14 Nm
No-load Speed	: 0 - 400 / 0 - 1,500 rpm
Drilling	
-in Wood	: 20 mm
- in Metal	: 10 mm
- in Masonry	: 8 mm
Weight	: 1.06 kg

GDR 120-LI
Cordless Impact Driver
(0 601 9F0 0L6)

***60 pts

Capacity	
Battery Voltage	: 12 V / 2.0 Ah
Max. Torque Hard	: 100 Nm
No-load Speed	: 0 - 1,300 / 2,600 rpm
Impact Rate	: 2,800 - 3,200 bpm
Max Screw Dia.	: 8 mm
Bit Holder	: 1/4"
Charging Time	: 90 mins
Weight	: 1.05 kg

12 V Li-Ion Bosch Heavy Duty

GSR 12 V-30
Cordless Drill / Screwdriver
(0 601 9G9 0L1)

HEAVY DUTY
1 year warranty*

***80 pts

Capacity	
Battery Voltage	: 12 V / 2.0 Ah
Drilling Dia.: In Steel	: 8mm
In Wood	:20 mm
Max.Torque(hard/soft):	30 / 17 Nm
No-load speed	: 0 - 420 / 1,600 rpm
Charger	: AL 12 V - 40
Charging Time	: 30 mins
Weight	: 0.82 kg

GSB 12 V-30
Cordless Impact Drill Driver
(0 601 9G9 1L1)

HEAVY DUTY
1 year warranty*

***90 pts

Capacity	
Battery Voltage	: 12 V / 2.0 Ah
Drilling Dia.: In Steel	: 10mm
In Wood	: 20 mm
In Masonry	: 8mm
Max.Torque(hard/soft):	30 / 17 Nm
No-load speed	: 0 - 420 / 1,600 rpm
Charger	: AL 12 V - 40
Charging Time	: 30 mins
Weight	: 0 82 kg

GDR 12 V-EC
Cordless Impact Driver
(0 601 9E0 0L2)

HEAVY DUTY
1 year warranty*

***100 pts

Capacity	
Battery Voltage	: 12 V / 2.0 Ah
Tool Holder System	: 1/4" Hex (6.35 mm)
No-load Speed	: 0 - 1,200 / 2,600 rpm
Impact Rate	: 0 - 2,700 / 3,100 bpm
Max. Torque	: 110 Nm
Charger	: GAL 1230 CV
Charging Time	: 45 mins
Weight	: 0.95 kg

GSR 12 V-15 FC
Cordless Screw / Drill Driver
(0 601 9F6 0L0)

HEAVY DUTY
1 year warranty*

***110 pts

Capacity	
Battery Voltage	: 12 V / 2.0 Ah
Drilling Dia.: In Steel	: 10 mm
In Wood	: 19 mm
Max. Torque (hard/soft):	30 / 15 Nm
No-load Speed	: 0 - 400 / 1,300 rpm
Chuck Capacity	: 10 mm
Charging Time	: 45 mins
Charger	: AL 1230 CV
Weight	: 0.6 kg (tool only)

GWS 12-76 V-EC (Solo)**
Cordless Angle Grinder
(0 601 9F2 000)

HEAVY DUTY
1 year warranty*

***60 pts

Capacity	
No-load Speed	: 19,500 rpm
Grinding Spindle Thread	: M5
Bore Size, Diameter	: 10 mm
Weight	: 0.9 kg

GOP 12 V-28 (Solo)**
Cordless Multi-Cutter
(0 601 8B5 0L0)

HEAVY DUTY
1 year warranty*

***70 pts

Capacity	
Oscilliation Angle on Left / Right	: 1.4°
No-load Speed	: 5,000 - 20,000 rpm
Weight	: 0.81 kg

GRO 12 V-35 (Solo)**
Cordless Rotary Tool
(0 601 9C5 000)

HEAVY DUTY
1 year warranty*

***40 pts

Capacity	
Battery Voltage	: 12 V
Max.Collet Diameter	: 3.2mm
No-load speed	: 5,000 / 32,000 rpm
Weight	: 0.62 kg

GAS 12 V-LI (Solo)**
Cordless Vacuum Cleaner
(0 601 9E3 081)

HEAVY DUTY
1 year warranty*

***30 pts

Capacity	
Battery Voltage	: 12 V
Container Volume	: 0.35 l
Filter Surface	: 408 cm²
Max. Volume Flow Rate	: 15 l/sec
Max. Volume Pressure	: 45 mbar
Weight	: 0.9 kg

GSA 12 V-LI (Solo)**
Cordless Sabre Saw
(0 601 64L 9L2)

HEAVY DUTY
1 year warranty*

***60 pts

Capacity	
Battery Voltage	: 12 V
Stroke speed	: 0 - 3,000 spm
Stroke Length	: 14.5 mm
Pipe Diameter	: 50 mm
Wood	: 65 mm

GST 12 V-LI (Solo)**
Cordless Jigsaw
(0 601 5A1 0L1)

HEAVY DUTY
1 year warranty*

***60 pts

Capacity	
Battery Voltage	: 12 V
No-load Stroke Rate	: 1,500 - 2,800 spm
Stroke Length	: 18 mm
Cutting Capacity	
- in Wood	: 70 mm
- in Aluminium	: 3 mm
- in Non-alloy Steel	: 3 mm
Weight	: 1.5 kg

GKF 12 V-8 (Solo)**
Cordless Palm Router
(0 601 6B0 0L0)

HEAVY DUTY
1 year warranty*

FLEXIBLE POWER SYSTEM

WORLD'S FIRST

***100 pts

Capacity	
Battery Voltage	: 12 V
Collect Size	: 8 (UNI), 6 & 1/4 (RAP) mm
No-load rotation	: 13, 000 min^{-1}
Weight	: 1.1 kg

GKS 12 V-LI (Solo)**
Cordless Circular Saw
(0 601 6A1 0L2)

HEAVY DUTY
1 year warranty*

***70 pts

Capacity	
Battery Voltage	: 12 V
No-load Speed	: 1,400 rpm
Depth of Cut - 90°	: 26.5 mm
Bore Diameter	: 15 mm
Max. Bevel	: 45°
Weight	: 1.4 kg

GLI 12 V-330 (Solo)**
Cordless Torch
(0 601 4A0 000)

HEAVY DUTY
1 year warranty*

***30 pts

Capacity	
Battery Voltage	: 12 V
Runtime	: 6 h
Brightness	: 330 lmn
Brightness (1m Dis.)	: 350 lux
Weight	: 0.3 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitles to 6 months warranty. Term and Conditions apply. ** **Solo** - Bare Tools Only, Batteries, Charger and L-BOXX to Order Seperately. *** Points (Pts) applicable for BeConnected promotion. User have to purchase , scan or manual register participating tools and upload invoices before receiving Pts. Promo Period: 2nd Jan - 31st Mar 2021. Term and conditions apply.

18 V Li-Ion Bosch Professional

GSR 180-LI
Cordless Drill / Driver
(0 601 9F8 1L0)

AUTO LOCK

***70 pts

Capacity	
Battery Voltage	: 18 V / 2.0 Ah
Chuck Capacity	: 13 mm
Clutch Setting	: 20 + 1
No-load Speed (1st gear)	: 0 - 450 rpm
(2nd gear)	: 0 - 1,700 rpm
Torque Settings	: 20+1
Max Screw Dia.	: 10 mm
Max Drilling Wood / Steel	: 35 / 10 mm
Weight	: 1.0 kg
Charger	: GAL 18V-20 CV

GSB 180-LI
Cordless Impact Drill
(0 601 9F8 3L0)

AUTO LOCK

***80 pts

Capacity	
Battery Voltage	: 18 V / 2.0 Ah
Chuck Capacity	: 13 mm
Torque (Hard / Soft)	: 54 / 21 Nm
No-load Speed (1st gear)	: 0 - 450 rpm
(2nd gear)	: 0 - 1,700 rpm
Impact Rate	: 0 - 27,000 min
Max Screw Dia.	: 10 mm
Max Drilling Wood / Steel	: 35 / 10 mm
Masonry	: 8 mm
Charger	: GAL 18V-20 CV

GBH 180-LI
Cordless hamer
(0 611 911 1L2)

***180 pts

Capacity	
Battery Voltage	: 18 V / 4.0 Ah
Impact Force	: 2.0 J
Drilling Capacity	: 20mm
No-load Speed	: 0 - 1,800 rpm
Impact rate	: 0 - 5,100 bpm
Charger	: GAL 18 V-40 CV
Charging Time	: 60 mins
Weight (bare tool)	: 2.3 kg

GDX 180-LI
Cordless Impact Wrench / Driver
(0 601 9G5 2L0)

***100 pts

Capacity	
Battery Voltage	: 18 V / 2.0 Ah
No-load Speed	: 0 - 2,800 rpm
Impact Rate	: 0 - 3,600 bpm
Max Torque	: 180 Nm
Head Length	: 170 mm
Dimensions	
Length/Height	: 171 / 234 mm
Motor	:DC
Bit Holder/Shank	:¼" Hex; ½" Square
LED light	:Yes - above trigger

GDS 250-LI
Cordless Impact Wrench
(0 601 9G6 1L0)

***120 pts

Capacity	
Battery Voltage	: 18 V / 4.0 Ah
Charger	: GAL 18 V-40 CV
Max Torque	: 250 Nm
No-load Speed	: 0 - 2,400 rpm
Impact Rate	: 0 - 3,300 bpm
Tool Holder	: 1/2" Square (Pin Hole + Retention Ring)
Screw Size	: M10 - M18

GLI 180-LI (Solo)**
Cordless Worklight
(0 601 4A1 1L0)

***20 pts

Capacity	
Voltage	: 18 V
Brightness in Lumen	: 300 Lm
No. of LED	: 6 Qnt
Runtime	: 300 min / Ah
Dimensions	: 116 x 78 x 163 mm
Weight	: 0.30 kg

18 V Li-Ion Bosch Heavy Duty

GSR 18 V-50
Cordless Drill / Screwdriver
(0 601 9H5 0L0)

HEAVY DUTY — 1 year warranty*

***120 pts

Capacity	
Battery Voltage	: 18 V / 2.0 Ah
Max.Torque(hard/soft)	: 50 / 28 Nm
Chunk Type	: Metal
No-load speed	: 0-460 / 0-1,800 rpm
Drilling Dia.: In Steel	: 13mm
In Wood	: 35mm
Max. Screw	: 10mm
Charger	: GAL 18V-40 CV
Charging Time	: 40 mins

GSB 18 V-50
Cordless Impact Drill
(0 601 9H5 1L0)

HEAVY DUTY — 1 year warranty*

***120 pts

Capacity	
Battery Voltage	: 18 V
Max.Torque(hard/soft)	: 50 / 28 Nm
Chunk Type	: Metal
No-load speed	: 0-460 / 0-1,800 rpm
Drilling Dia.: In Steel	: 13mm
In Wood	: 35mm
In Masonry:	13mm
Max. Screw	: 10mm
Charger	: GAL 18V-40 CV
Charging Time	: 40 mins

GWS 18V-10
Cordless Angle Grinder
(0 601 9J4 0L1)

HEAVY DUTY — 1 year warranty*

***300 pts

Capacity	
Battery Voltage	: 18 V / ProCore 8.0Ah
No-Load Speed	: 9000 rpm
Max Output Power	: Equivalent to 1000W corded tool (w/PRoCORE)
Grip Circumference	: 155mm
Disc	: 100mm (M10)
Weight	: 2KG (Tool only)
Charger	: GAL 1880 CV
Charging Time	: 65 mins

GDX 18V-200C
Cordless Impact Wrench / Driver
(0 601 964 2L0)

HEAVY DUTY — 1 year warranty*

***200 pts

Capacity	
Battery Voltage	: 18 V / 4.0Ah
Max. Torque	: 200 Nm
No load Speed	: 1- 1,100/2,300/3,400 rpm
Impact Rate	: 0- 2,300/3,400/4,200 rpm
Head Length	: 147 mm
Weight (w/o battery)	: 1.17 kg
Bit Holder/Square Drive	: 1/4" Hex 1/2" Square
Charger	: GAL 18V-40CV
Charging Time	: 60 mins

GSR 18 V-60 FC Solo**
Cordless Drill / Driver
(0 601 9G7 1L0)

HEAVY DUTY — 1 year warranty*

Due to FlexiClick System

*Optional accessories

***150 pts

Capacity	
Battery Capacity	: 18 V
Drilling Dia.: In Steel	: 13mm
In Wood	: 38 mm
Max.Torque(hard/soft):	60 / 31 Nm
No-load speed	: 0 - 6000 / 1,900 rpm
Weight	: 0.9 kg

GDS 18 V-EC 300 ABR Solo
Cordless Impact Wrench
(0 601 9D8 281)

HEAVY DUTY — 1 year warranty*

***100 pts

Capacity	
Battery Capacity	: 18 V
Max.Torque	: 300 Nm
No-load speed	: 0 - 2,400 rpm
Impact Rate	: 0 - 3,400 bpm
Bolt Size	: M10 - M18
Weight	: 1.85 kg

GLI 18 V-LI VariLED (Solo)**
Cordless Torch
(0 601 443 400)

HEAVY DUTY — 1 year warranty*

Capacity	
Battery Voltage	: 18 V
Luminous Flux	: 420 Lumen
Max. operating time	: 135 mins/Ah
Weight	: 0.3 kg

GLI 18 V-1900 (Solo)**
Cordless Torch
(0 601 446 400)

HEAVY DUTY — 1 year warranty*

Capacity	
Battery Voltage	: 18 V
Max. Brightness	: 1900lm
Dimensions	: 292 x 187 x 69 mm
Runtime	: 100 min / Ah
Weight	: 1.6kg

GSA 18 V-32 (Solo)**
Cordless Sabre Saw
(0 601 6A8 108)

HEAVY DUTY — 1 year warranty*

***200 pts

Capacity	
Battery Voltage	: 18 V
Stroke Length	: 32 mm
No-load Stroke Rate	: 0 - 2,500 spm
Cutting Depth In Wood	: 230 mm
in Metal	: 175 mm
Weight	: 3.5 kg

GST 18 V-LI B (Solo)**
Cordless Jigsaw
(0 601 5A6 100)

HEAVY DUTY — 1 year warranty*

***120 pts

Capacity	
Battery Voltage	: 18 V
No-load Stroke Rate	: 0 - 2,700 spm
Stroke Height	: 23 mm
Cutting Depth In Metal	: 8 mm
In Wood	: 120 mm
In Aluminium	: 20 mm
Slanted Cuts	: 0 - 45°
Weight Incl. Battery	: 2.4 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitles to 6 months warranty. Term and Conditions apply. ** **Solo** - Bare Tools Only, Batteries, Charger and L-BOXX to Order Seperately. *** Points (Pts) applicable for BeConnected promotion. User have to purchase , scan or manual register participating tools and upload invoices before receiving Pts. Promo Period: 2nd Jan - 31st Mar 2021. Term and conditions apply.

GKS 18 V-57 (Solo)**
Cordless Circular Saw
(0 601 6A2 2L0)

HEAVY DUTY
1 year warranty*

***130 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 3,400 rpm
Blade Diameter	: 165 mm
Saw Blade Bore Diameter	: 20 mm
Max. Cutting Capacities at 90°	: 57 mm
at 45°	: 42 mm
Weight	: 4.1 kg

GGS 18 V-LI (Solo)**
Cordless Straight Grinder
(0 601 9B5 300)

HEAVY DUTY
1 year warranty*

***110 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 2 - 22,000 rpm
Toolholder	: Collet up to 8 mm Diameter
Weight	: 1.8 kg

GAS 18 V-1 (Solo)**
Cordless Vacuum Cleaner
(0 601 9C6 2L0)

HEAVY DUTY
1 year warranty*

***40 pts

Capacity	
Battery Voltage	: 18 V
Container Vol.	: 700 ml
Max. Underpressure	: 6 kPa
Max. Airflow	: 10 l/sec
Speeds	: 1 Speed
Runtime	: 7 min / Ah
Weight (w/o batt, w/o AC)	: 1.3 kg

GAS 18 V-10 L (Solo)**
Cordless Dust Extractor
(0 601 9C6 300)

HEAVY DUTY
1 year warranty*

***70 pts

Capacity	
Battery Voltage	: 18 V
Max. Vacuum	: 90 mbar
Maximum Airflow	: 24 l/sec
Max. Runtime with 6.0 Ah Battery	: 24 min
Container Volume, Gross/net	: 10 / 6 Litre
Weight	: 4.6 kg

GBL 18 V-120 (Solo)**
Cordless Blower
(0 601 9F5 1L0)

HEAVY DUTY
1 year warranty*

***40 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 17,000 rpm
Air Speed, Max	: 75 m/s
Air Volume	: 2.0 m³/min
Runtime	: Speed I : 9 min / Ah
	Speed II: 5 min / Ah
Weight without Cable: 1.1 kg	

GHO 18 V-LI (Solo)**
Cordless Planer
(0 601 5A0 300)

HEAVY DUTY
1 year warranty*

***180 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 14.000 rpm
Cutting Depth	: 0 - 1,6 mm
Rebating Depth	: 0 - 8 mm
Planing Width, Max.	: 82 mm
Weight	: 2.6 kg

GSS 18 V-LI (Solo)**
Cordless Orbital Sander
(0 601 9D0 2L0)

HEAVY DUTY
1 year warranty*

***40 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 11.000 rpm
Orbital Rate	: 22,000min-1
Orbital Diameter	: 1,6 mm
Pad Size	: 113 x 101 mm
Sanding Paper Size	: 114 x 140 mm
Weight	: 1.0 kg

GOP 18 V-28 (Solo)**
Cordless Multi-Cutter
(0 601 8B6 002)

HEAVY DUTY
1 year warranty*

BRUSHLESS MOTOR

***110 pts

Capacity	
Battery Voltage	: 18 V
Oscillation Angle Left/Right	: 1,4°
No-load Speed	: 8,000 - 20,000 rpm
Grip Circumference	: 193 mm
Tool Length (without battery)	: 312 mm
Weight	: 2.0 kg

GCB 18V-63 (Solo)**
Cordless Metal Band Saw
(0 601 2A0 400)

HEAVY DUTY
1 year warranty*

***130 pts

Capacity	
Battery Voltage	: 18 V
Cutting Capacity	: 63.5 x 63.5 mm
Saw Blade Dimensions	: 733 x 12.7 x0.35 mm
No-load Speed	: 162 m/min
Weight without Battery: 3.3 kg	
Tool dimensions	: 355 x 255 x 200 mm

GBH 18 V-26 (Solo)**
Cordless Rotary Hammer
(0 611 909 000)

HEAVY DUTY
1 year warranty*

ELECTRONIC
KICK BACK STOP
Vibration Control
BRUSHLESS MOTOR

***160 pts

Capacity	
Battery Voltage	: 18 V
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
Impact Energy	: 2.6 J
Rated Speed	: 0 - 890 rpm
Impact Rate	: 0 - 4,350 bpm
Weight	: 3.5 kg

GDE 18 V-16
Cordless Dust Extractor
(1 600 A00 51M)

Capacity	
Compatible with	: GBH 18V-26 only
Drilling Diameter	: Max. 16 mm
Max. Drilling	: 100 mm
Weight	: 1.2 kg

36 V Li-Ion Heavy Duty

GBH 36 V-EC Compact
Cordless Rotary Hammer
(0 611 903 RL1)

2 mode

HEAVY DUTY
1 year warranty*

ELECTRONIC
SDS-plus
Vibration Control
EC brushless motor

Capacity	
In Concrete	: 4 - 18 mm
In Steel	: 13 mm
In Wood	: 30 mm
Impact Energy	: 1.7 J
Rated Speed	: 0 - 1,500 rpm
Impact Rate	: 0 - 4,850 bpm
Battery Voltage	: 36 V / 2.0 Ah
Charger	: AL 3640 CV
Charging Time	: 45 mins
Weight	: 2.9 kg

GBH 36 V-LI Plus
Cordless Rotary Hammer
(0 611 906 0L0) / (0 611 906 075)

3 mode

HEAVY DUTY
1 year warranty*

ELECTRONIC
SDS-plus
Vibration Control

Capacity	
In Concrete	: 8 - 28 mm
In Steel	: 13 mm
In Wood	: 30 mm
Impact energy	: 3.2 J
Impact Rate	: 0 - 4,174 bpm
Battery Voltage	: 36 V / 4.0 Ah / 6.0 Ah
Charger	: AL 3680 CV
Charging Time	: 35 mins
Weight	: 4.5 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitles to 6 months warranty. Term and Conditions apply. ** **Solo** - Bare Tools Only, Batteries, Charger and L-BOXX to Order Seperately. *** Points (Pts) applicable for BeConnected promotion. User have to purchase , scan or manual register participating tools and upload invoices before receiving Pts. Promo Period: 2nd Jan - 31st Mar 2021. Term and conditions apply.

12 V Li-Ion Battery Pack

GBA 12 V 2.0 Ah
(1 600 A00 F6X)

GBA 12 V 4.0 Ah
(1 600 A00 F71)

GBA 12 V 6.0 Ah
(1 600 A00 X7H)

18 V Li-Ion Battery Pack

COOL PACK
GBA 18 V 2.0 Ah
(1 600 A00 1CG)

COOL PACK
GBA 18 V 4.0 Ah
(1 600 A00 163)

COOL PACK
GBA 18 V 6.0 Ah
(1 600 A00 8AE)

ProCORE 18V Battery Pack

COOL PACK
ProCore 18 V 4.0 Ah
(1 600 A01 93L)

COOL PACK
ProCore 18 V 8.0 Ah
(1 600 A01 93N)

COOL PACK
ProCore 18 V 12.0 Ah
(1 600 A01 6GU)

36 V Li-Ion Battery Pack

COOL PACK
GBA 36 V 2.0 Ah
(1 600 A00 1ZJ)

COOL PACK
GBA 36 V 6.0 Ah
(1 600 A00 L1M)

Charger

GAL 12V-40 CV
(for 10.8 V & 12 V Battery)
(1 600 A01 B8Z)

GAL 1880 CV
(for 14.4 V & 18 V Battery)
(1 600 A00 B8H)

GAL 18V-40 CV
(for 14.4 V & 18 V Battery)
(1 600 A02 1KV)

GAL 18 V-160 CV
(for 18 V Battery)
(1 600 A01 9S7)

GAL 1860 CV
(for 14.4 V & 18 V Battery)
(1 600 A00 16Y)

GAX 18 V-30
(for 12 V, 14.4 V & 18 V Battery)
(1 600 A01 1AA)

Starter Kit

12 V 2.0 Ah (2 Batteries)
+ GAL 12 V-40 (1 Charger)
(1 600 A01 B8Y)

18 V 2.0 Ah (2 Batteries)
+ GAL 18 V-40 (1 Charger)
(1 600 A01 B91)

18 V 4.0 Ah (2 Batteries)
+ GAL 18 V-40CV (1 Charger)
(1 600 A01 9S1)

ProCORE 18 V Starter Kit

ProCORE starter kit
18 V 4.0 Ah (2 batteries)
+ GAL 1880 CV (1 charger)
(1 600 A01 6GG)

ProCORE starter kit
18 V 8.0 Ah (2 batteries)
+ GAL 18-160 C (1 charger)
(1 600 A01 6GR)

ProCORE starter kit
18 V 12.0 Ah (2 batteries)
+ GAL 18-160 C (1 charger)
(1 600 A01 6GZ)

L-BOXX

L-BOXX 102
(1 600 A01 2FZ)

L-BOXX 136
(1 600 A01 2G0)

L-BOXX 238
(1 600 A01 2G2)

L-BOXX 374 (Indent)
(1 600 A01 2G3)

Trolley / Roller

L-BOXX Trolley
(1 600 A00 1SA)

L-BOXX Roller
(1 6000 A00 1S9)

More power

ProCORE18V:
latest cell technology and intelligent battery management.

[1] GBA 18V 6.0Ah vs. ProCORE18V 8.0Ah: 860 W vs. 1620 W.

Faster charging

Power Boost Mode:
get back to work faster than ever.

[2] To reach 50% charge of the ProCORE18V 4.0Ah (in Power Boost Mode). As of May 2019.

Longer lifetime

COOLPACK 2.0 technology:
prevents the battery from overheating.

[3] Vs. no Bosch COOLPACK 2.0 technology.

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitles to 6 months warranty. Term and Conditions apply. ** **Solo** - Bare Tools Only, Batteries, Charger and L-BOXX to Order Seperately. *** Points (Pts) applicable for BeConnected promotion. User have to purchase , scan or manual register participating tools and upload invoices before receiving Pts. Promo Period: 2nd Jan - 31st Mar 2021. Term and conditions apply.

Charging Time For Battery Capacity (Minute)

		12 V Charger			18 V Charger							36 V Charger
	powered by Li-Ion technology	GAL 1210 CV (1 600 A00 HR3)	GAL 12V-20	GAL 12 V-40 CV (1 600 A01 B8Z)	AL 1814 CV (2 607 225 729)	GAL 18V-20 (1 600 A02 1KV)	GAL 18 V-40 (1 600 A01 9RK)	GAL 1860 CV (1 600 A00 16Y)	GAL 1880 CV (1 600 A00 B8H)	GAX 18 V-30 (1 600 A01 1AA)	GAL 18 V-160 C (1 600 A01 9S7)	GAL 3680 CV (2 607 225 901)
12 V	1.5 Ah	95	50	25						30		
12 V	2.0 Ah (1 600 A00 F6X)	120	65	35						45		
12 V	4.0 Ah (1 600 A00 F71)	240	125	65						85		
12 V	6.0 Ah (1 600 A00 X7H)	360	185	95						130		
18 V	1.5 Ah (1 600 A00 1CC)				80	50	30	25	12	30	-	25
18 V	2.0 Ah (1 600 A00 1CG)				105	65	40	35	15	45	-	30
18 V	4.0 Ah (1 600 A00 163)				210	125	60	45	35	85	25	35
18 V	6.0 Ah (1 600 A00 8AE)				-	180	80	65	50	-	45	55
ProCORE 18 V	4.0 Ah (1 600 A01 6GB)				-	-	-	75	50	-	50	
ProCORE 18 V	8.0 Ah (1 600 A01 6GK)				-	-	-	120	65	-	55	
ProCORE 18 V	12.0 Ah (1 600 A01 6GU)				-	-	-	-	90	-	60	
36 V	2.0 Ah (1 600 A00 1ZJ)											30
36 V	6.0 Ah (1 600 A00 L1M)											35

* Above data is based on approximate charging time

Drill

GBM 320
(0 601 1A4 5L0)

1 619 PA4 619 ***20 pts

Capacity	
Power Input	: 320 W
In Steel	: 6.5 mm
In Aluminium	: 13 mm
In Wood	: 13 mm
No-load Speed	: 4,200 rpm
Weight	: 1.0 kg

GBM 350
(0 601 1A9 5L0)

1 619 P02 086 ***20 pts

Capacity	
Power Input	: 350 W
In Steel	: 10 mm
In Wood	: 20 mm
No-load Speed	: 2,800 rpm
Weight	: 1.2 kg

GBM 10 RE
(0 601 473 5L0)

HEAVY DUTY 1 year warranty*

2 610 391 290 ***40 pts

Capacity	
Power Input	: 450 W
In Steel	: 10 mm
In Aluminium	: 10 mm
In Wood	: 25 mm
No-load Speed	: 0 - 2,600 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.3 kg

GBM 13 RE
(0 601 477 5L0)

HEAVY DUTY 1 year warranty*

2 610 391 290 ***50 pts

Capacity	
Power Input	: 600 W
In Steel	: 13 mm
In Aluminium	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 2,600 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.65 kg

GBM 13 HRE "High Torque"
(0 601 049 603)

HEAVY DUTY 1 year warranty*

1 607 031 222

Capacity	
Power Input	: 550 W
In Steel	: 13 mm
In Aluminium	: 20 mm
In Wood	: 40 mm
No-load Speed	: 0 - 550 rpm
Torque (Approx.)	: 40 Nm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.1 kg

GBM 50-2
(0 601 1B4 0L0)

HEAVY DUTY 1 year warranty*

***720 pts

Capacity	
Power	: 1,200 W
No-load Speed	: 50-255 / 100-510 rpm
Annular Cutter	: Ø50 mm
Max. Twist Drill	: Ø23 mm
Max Thread	: M16
Magnetic Force	: 14,000 N
Weight	: 14.7 kg

Impact Drill

GSB 10 RE
(0 601 216 1L6)

2 610 391 290 ***40 pts

Capacity	
Power Input	: 500 W
In Masonry	: 10 mm
In Steel	: 8 mm
In Wood	: 20 mm
No-load Speed	: 0 - 2,600 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.5 kg

GSB 16 RE
(0 601 228 1L2)

HEAVY DUTY 1 year warranty*

2 610 391 290 ***60 pts

Capacity	
Power Input	: 750 W
In Concrete	: 16 mm
In Steel	: 12 mm
In Wood (hard)	: 25 mm
No-load Speed	: 0 - 3,250 rpm
Impact Rate	: 0 - 48,500 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg

GSB 20-2 RE
(0 601 1A2 1L0)

HEAVY DUTY 1 year warranty*

1 617 000 525 ***90 pts

Capacity	
Power Input	: 800 W
In Concrete	: 20 mm
In Steel	: 13 mm
In Wood	: 40 mm
No-load Speed	: 0 - 1,000 / 3,000 rpm
Impact Rate	: 0 - 16,000 / 48,000 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.6 kg

Multi Cutter

GOP 30-28
(0 601 237 0L0)

HEAVY DUTY 1 year warranty*

1 619 P02 870 ***90 pts

Capacity	
Power Input	: 300W
Oscillating amplitude	: 2.8° (2 x 1.4°)
No-load Speed	: 8,000 - 20,000 opm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.5 kg

Foam Cutter

GSG 300
(0 601 575 103)

HEAVY DUTY 1 year warranty*

2 604 320 911 ***300 pts

Capacity	
Power Input	: 350 W
Cutting Capacity	: 300 mm
No-load Stroke Rate	: 3,200 spm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.6 kg

Stirrer / Mixer Drill

GRW 12 E
(0 601 1A7 070)

HEAVY DUTY 1 year warranty*

1 607 014 17A ***240 pts

Capacity	
Power Input	: 1,200 W
Connector Type	: M14 Inside Thread
Max. Paddle Ø	: 140 mm
Incl. Paddle Ø	: 140 mm
No-load Speed	: 0 - 1,000 rpm
Nominal speed	: 0 - 620 min^{-1}
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 5.3 kg

Straight Grinder

GGS 3000 L
(0 601 224 0L0)

1 607 031 223

Capacity	
Power Input	: 300 W
Max. Collet Capacity	: 8 mm
No-load Speed	: 28,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.5 kg

GGS 5000 L
(0 601 224 1L0)

1 607 031 223 ***90 pts

Capacity	
Power Input	: 500 W
Max. Collet Capacity	: 8 mm
No-load Speed	: 33,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.4 kg

GGS 28 LC
(0 601 221 070)

HEAVY DUTY 1 year warranty*

KICK BACK STOP

1 607 014 176 ***130 pts

Capacity	
Power Input	: 650 W
Max.Collet Diameter	: 8 mm
No-load Speed	: 28,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.6 kg

GGS 28 C
(0 601 220 070)

HEAVY DUTY 1 year warranty*

KICK BACK STOP

1 607 014 176 ******90 pts

Capacity	
Power Input	: 650 W
Max.Collet Diameter	: 8 mm
No-load Speed	: 28,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.4 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitles to 6 months warranty. Term and Conditions apply. ** **Solo** - Bare Tools Only, Batteries, Charger and L-BOXX to Order Seperately. *** Points (Pts) applicable for BeConnected promotion. User have to purchase , scan or manual register participating tools and upload invoices before receiving Pts. Promo Period: 2nd Jan - 31st Mar 2021. Term and conditions apply.

4" Angle Grinder

GWS 060
(0 601 375 6L0)

1 619 P07 571 — ***20 pts

Capacity	
Power Input	: 670 W
No-load Speed	: 12,000 rpm
Spindle Thread	: M10
Disc Diameter	: 100 mm
Weight	: 1.6 kg

GWS 750-100
(0 601 394 0L0)

HEAVY DUTY — 1 year warranty*

1 619 P11 715 — ***30 pts

Capacity	
Power Input	: 750 W
No-load Speed	: 11,000 rpm
Disc Diameter	: 100 mm
Grip Size	: 59 / 54.5 mm
Perimeter	: 187 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg

GWS 7-100 ET
(0 601 388 5L0)

HEAVY DUTY — 1 year warranty*

1 619 P02 870 — ***40 pts

Capacity	
Power Input	: 720 W
Grinding / Cutting Disc Diameter	: 100 mm
Wire Cup Brush Diameter	: 70 mm
No-load Speed	: 2,800 - 9,300 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg

GWS 900-100
(0 601 396 0L0)

HEAVY DUTY — 1 year warranty*

1 619 P11 715 — ***50 pts

Capacity	
Power Input	: 900 W
Grinding / Cutting Disc Diameter	: 100 mm
Spindle Thread	: M10
No-load Speed	: 11,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg

GWS 900-100 S
(0 601 396 1L0)

HEAVY DUTY — 1 year warranty*

1 619 P11 715 — ***50 pts

Capacity	
Power Input	: 900 W
Grinding / Cutting Disc Diameter	: 100 mm
Spindle Thread	: M10
No-load Speed	: 2,800 - 11,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.9 kg

GWS 9-100 P
(0 601 396 5L0)

HEAVY DUTY — 1 year warranty*

1 619 P11 715 — ***40 pts

Capacity	
Power Input	: 900 W
Disc Diameter	: 100 mm
Spindle Thread	: M10
No-load Speed	: 11,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.9 kg

5" Angle Grinder

GWS 13-125 CI
(0 601 79E 002)

HEAVY DUTY — 1 year warranty*

***80 pts

1 607 000 V37

Capacity	
Power Input	: 1,300 W
No-load Speed	: 11,500 rpm
Spindle Thread	: M14
Disc Diameter	: 125 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.3 kg

GWS 17-125 CI
(0 601 79G 002)

HEAVY DUTY — 1 year warranty*

1607 000 V37 — ***90 pts

Capacity	
Power Input	: 1,700 W
No-load Speed	: 11,500 rpm
Spindle Thread	: M14
Disc Diameter	: 125 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.4 kg

6" Angle Grinder

GWS 18-125 L (Indent)
(0 601 7A3 0L0)

HEAVY DUTY — 1 year warranty*

1607 000 V37 — ***90 pts

Capacity	
Power Input	: 1,800 W
No-load Speed	: 12,000 rpm
Spindle Thread	: M14
Disc Diameter	: 125 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.5 kg

GWS 17-150 CI
(0 601 79K 002)

HEAVY DUTY — 1 year warranty

1 607 000 V37 — ***100 pts

Capacity	
Power Input	: 1,700 W
No-load Speed	: 9.300 rpm
Spindle Thread	: M14
Disc Diameter	: 150 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.4 kg

Bench Grinder

GBG 35-15
(0 601 27A 3L0)

HEAVY DUTY — 1 year warranty*

***60 pts

Capacity	
Power Input	: 350 W
No-load Speed	: 3,000 rpm
Disc Diameter	: 150 mm
Weight	: 10 kg

GBG 60-20
(0 601 27A 4L0)

HEAVY DUTY — 1 year warranty*

***70 pts

Capacity	
Power Input	: 600 W
No-load Speed	: 3,600 rpm
Disc Diameter	: 200 mm
Weight	: 15 kg

Reciprocating Saw

GSA 120
(0 601 6B1 0L0)

***80 pts

Capacity	
Input Power	: 1,200 W
Stoke Rate	: 0 - 3,000 /min
Stroke Length	: 29mm
Blade Change	: SDS
Max. Cutting Dept in Wood	: 220 mm
in Meta	: 20 mm
Weight	: 3.7 kg

Shear

GSC 2.8
(0 601 506 142)

HEAVY DUTY — 1 year warranty*

1 607 031 228

Capacity	
Power Input	: 500 W
In Steel	: 2.8 mm
In Aluminium	: 3.5 mm
No-load Stroke Rate	: 2,400 stroke/min
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.7 kg

Nibbler

GNA 2.0
(0 601 530 103)

HEAVY DUTY — 1 year warranty*

1 607 031 228

Capacity	
Power Input	: 500 W
Mild Steel	: 2.0 mm
Stainless Steel	: 1.0 mm
No-load Stroke Rate	: 2,400 stroke/min
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.0 kg

Jigsaw

GST 700
(0 601 2A7 0L0)

***40 pts

Capacity	
Power Input	: 500 W
Stroke Rate	: 1,450 - 3,200 spm
Cutting Depth in Wood	: 70 mm
Stroke Length	: 20 mm
Weight	: 2.1 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitles to 6 months warranty. Term and Conditions apply. ** **Solo** - Bare Tools Only, Batteries, Charger and L-BOXX to Order Seperately. *** Points (Pts) applicable for BeConnected promotion. User have to purchase , scan or manual register participating tools and upload invoices before receiving Pts. Promo Period: 2nd Jan - 31st Mar 2021. Term and conditions apply.

GST 90 BE Professional (0 601 58F 0L0)

Top class convenience

HEAVY DUTY 1 year warranty*

NEW!

WHY THIS

01 Maximum Performance
Fast work results due to reliable 650 W motor

02 Speed Control
Control electronics and 4-stage pendulum action for material-specific work

03 High-level of Convenience
Tool-free Bosch SDS-system makes changing saw blades easy

TARGET USERS

- Electrical installation
- Insulation work activities
- Plumbing, heat and air-conditioning installation
- Painting and glazing

90 pts

GST 90 BE Professional	Unit	Specifications
Rated power input	W	650
No-load stroke rate	spm	500 - 3100
Stroke length	mm	26
Cutting Capacity		
- Wood	mm	90
- In alluminium		20
- In steel (unalloyed)		10
Weight	kg	2.6

Circular Saw

GKS 600 (0 601 6A9 0L0)

***60 pts

Capacity	
Power Input	: 1,200 W
No-load Speed	: 5,000 rpm
Blade Bore Size	: 20 mm
Diameter	: 165 mm
Cutting depth (90°/45°)	: 55 / 37 mm
Weight	: 3.6 kg

GKS 140 (0 601 6B3 0LI)

***60 pts

Capacity	
Input Power	: 1,400 W
No-load Speed	: 6,000 rpm
Blade Bore Size	: 20 mm
Diameter	: 184 mm
Max. Cutting Dept	: 64+/- mm
Bevel Capacity	: 0 - 45 °

GKS 190 (0 601 623 0L9)

HEAVY DUTY 1 year warranty*

1 619 P06 346

***80 pts

Capacity	
Power Input	: 1,400 W
Blade Diameter	: 184 mm
Max. Cutting Capacities	
at 90°	: 67 mm
at 45°	: 48 mm
No-load Speed	: 5,500 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 4.1 kg

GKS 235 Turbo (0 601 5A2 0L0)

HEAVY DUTY 1 year warranty*

1 619 P01 685

***110 pts

Capacity	
Power Input	: 2,050 W
Saw Blade Diameter	: 235 mm
Max. Cutting Capacities	
at 90°	: 85 mm
at 45°	: 65 mm
No-load Speed	: 0 - 5,300 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 7.6 kg

Diamond Wheel Cutter

GDC 140 (0 601 3A0 0L0)

***30 pts

Capacity	
Power Input	: 1,400 W
No-load Speed	: 13,200 rpm
Max. Cutting Disc Dia.	: 70 mm
Max. Cutting Depth	: 35 mm
Weight	: 2.9 kg

Cut-off Machine

GCO 220 (0 601 B37 3L0)

***70 pts

Capacity	
Power Input	: 2,200 W
No-load Speed	: 3,800 rpm
Disc Diameter	: 355 mm
Cutting Capacity	
Square Bar	: 119 x 119 mm
Round Bar	: 129 mm
Soft Start	: No
Weight	: 14 kg

GCO 14-24 J (0 601 B37 2L0)

HEAVY DUTY 1 year warranty*

1 607 014 171

Capacity	
Power Input	: 2,400 W
Saw Blade Diameter	: 355 mm
Saw Blade Bore	: 25.4 mm
No-load Speed	: 3,800 rpm
Cutting Capacity	: 100 x 196 mm
	: 119 x 119 mm
	: 130 x 130 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 18.1 kg

Mitre Saw

GCM 10 MX (0 601 B29 0L0)

HEAVY DUTY 1 year warranty*

1 607 014 171

***150 pts

Capacity	
Power Input	: 1,700 W
Blade Size	: 255 mm
Arbour Size	: 25.4 mm
No-load Speed	: 4,800 rpm
Max Mitre	: 45° L / 52° R
Max. Cutting Capacity	: 89 x 89 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 13.5 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitles to 6 months warranty. Term and Conditions apply. ** **Solo** - Bare Tools Only, Batteries, Charger and L-BOXX to Order Seperately. *** Points (Pts) applicable for BeConnected promotion. User have to purchase , scan or manual register participating tools and upload invoices before receiving Pts. Promo Period: 2nd Jan - 31st Mar 2021. Term and conditions apply.

GCM 12 GDL
(0 601 B23 670)

HEAVY DUTY
1 year warranty*

2 610 021 311

***520 pts

Capacity	
Power Input	: 2,000 W
Blade Size	: 305 mm
Arbour Size	: 30 mm
No-load Speed	: 3,800 rpm
Max. Mitre	: 52° L / 60° R
Cutting Capacity	: 104 x 341 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 32.1 kg

Slide Mitre Saw

GCM 8 SJL
(0 601 B19 1L0)

HEAVY DUTY
1 year warranty*

1 609 B03 790

Capacity	
Power Input	: 1,600 W
Blade Size	: 216 mm
Bore Size	: 25.4 mm
No-load Speed	: 5,500 rpm
Max. Miter	: 52° L / 60° R
Cutting Capacity	: 70 x 312 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 17.3 kg

Mitre Saw Stand

T1B
(0 601 B12 310)

Capacity	
Length of Work Bench without Extension	: 1,220 mm
Length of Work Bench with extension	: 2,630 mm
Weight	: 15 kg / 19 kg

Table Saw

GTS 10 J
(0 615 990 L9D)

HEAVY DUTY
1 year warranty*

2 610 018 332

Capacity	
Power Input	: 1,800 W
Saw Blade Diameter	: 254 mm
Bevel Setting	: 47° L / 2° R
Cutting Capacity (Right)	: 460 mm
(Left)	: 210 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 26 kg

Table Saw Stand

GTA 600

Capacity	
Table Height	: 602 mm
Max. Length Extension Unfolded	: 450 x 520 (D x L)
Max. Load Capacity	: 60 kg
Weight	: 6.3 kg

Eccentric Sander

GEX 125-1 A / GEX 125-1 AE
(0 601 387 0L0) / (0 601 387 5L0)

HEAVY DUTY
1 year warranty*

2 609 120 199

ELECTRONIC

***60/70 pts

Capacity	
Power Input	: 250 W
No-load Speed	: 7,500 - 12,000 rpm
Oscillating Circuit Diameter	: 2.5 mm
Orbit Rate	: 15,000 - 24,000 opm
Sanding Plate	: 125 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.3 kg

Planer

GHO 6500
(0 601 596 0L0)

ELECTRONIC
CONSTANT ELECTRONIC

2 609 120 398

***40 pts

Capacity	
Power Input	: 650 W
No-load Speed	: 16,500 rpm
Adjustable Chip Thickness	: 0 - 2.6 mm
Adjustable Rebating Depth	: 0 - 9 mm
Weight	: 2.8 kg

GHO 10-82
(0 601 594 006)

HEAVY DUTY
1 year warranty*

WOOD RAZOR

2 609 120 064

***80 pts

Capacity	
Power Input	: 710 W
Planing Width	: 82 mm
Planing Depth	: 0 - 1.0 mm
No-load Speed	: 16,500 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.5 kg

Belt Sander

GBS 75 A
(0 601 274 004)

HEAVY DUTY
1 year warranty*

1 607 031 222

***130 pts

Capacity	
Power Input	: 710 W
No-load Belt Speed	: 300 m/min
Sanding Surface	: 75 x 130 mm
Belt Size	: 75 x 533 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.2 kg

Polisher

GPO 950
(0 601 3A2 0L0)

***70 pts

Capacity	
Power Input	: 950 W
Adaptor Size	: M14 / M16
Rubber Sanding Plate, Diameter	: 180 mm
Variable Speed	: 600 - 2,100 rpm
Weight	: 5.5 kg

GPO 12 CE
(0 601 389 0L0)

HEAVY DUTY
1 year warranty*

ELECTRONIC

1 607 014 176

***90 pts

Capacity	
Power Input	: 1,250 W
No-load Speed	: 750 - 3,000 rpm
Polishing Disc Diameter	: 180 mm
Thread of Polishing Spindle	: M14
Tool Length	: 450 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.5 kg

Orbital Sander

GSS 140
(0 601 2A8 0L0)

***20 pts

Capacity	
Power Input	: 220 W
No-load Speed	: 14,000 rpm
No-load Orbital Stroke Rate	: 28,000 min⁻¹
Orbital Diameter	: 1.5 mm
Sanding Sheet Dimension	: 114 x 140 mm
Sanding Plate Dimension	: 101 x 112 mm
Weight	: 1.2 kg

GSS 2300
(0 601 298 0L0)

***30 pts

Capacity	
Power Input	: 190 W
No-load Speed	: 12,000 rpm
Weight	: 1.5 kg

Hot Air Gun

GHG 18-60
(0 601 2A6 1L0)

HEAVY DUTY
6 months warranty

SPEED SELECTION
CONSTANT SPEED

***40 pts

Capacity	
Power Input	: 1,800 W
Temperature	: 50 / 400 / 600 °C
Air Flow Rate	: 250 / 350 / 600 l/min
Weight	: 0.52 kg

GHG 20-63
(0 601 2A6 2L0)

HEAVY DUTY
6 months warranty

SPEED SELECTION
CONSTANT SPEED
DISPLAY

***60 pts

Capacity	
Power Input	: 2,000 W
Temperature	: 50 - 630 °C
Air Flow Rate	: - 150 / 300 / 500 l/min
Weight	: 0.65 kg

Trimming / Router

GKF 550
(0 601 6A0 0L0)

***40 pts

Capacity	
Power Input	: 550 W
No-load Speed	: 33,000 rpm
Bix Size	: 6 mm / 1/4"
Weight	: 1.4 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitles to 6 months warranty. Term and Conditions apply. ** **Solo** - Bare Tools Only, Batteries, Charger and L-BOXX to Order Seperately. *** Points (Pts) applicable for BeConnected promotion. User have to purchase , scan or manual register participating tools and upload invoices before receiving Pts. Promo Period: 2nd Jan - 31st Mar 2021. Term and conditions apply.

GOF 130 Professional (0 601 6B7 0L1)

No Stop, No Jams: the efficiency boost for your routing experience

NEW!

WHY THIS

01 Unsurpassed Durability
Overload protection *
Innovative plunge design

02 Efficient Boost Cutting with a perfect finish
Thanks to Constant Speed feature and excellent motoe performance

03 Ease of Use Design
Tailor made ergonomic design *
flexible options for bit changes: use wrenches or spindle lock

Efficiency boost
•Powerful motor: easy & fast on heavy applications
•Constant Speed: maximum cutting efficiency within its class

Convenient operation with easy reachable buttons
•Speed adjustment and switch buttons on handles
•Angular lock release button within thumb range for effortless pressing

High durability
•Overload protection: protect motor for long lifetime
•Innovative plunge design: minimizes dust intake for 10000+ jam free operations in dusty environment

Easy maintenance
•Quick carbon brush change

Safety care
•Lock on & lock off switch: 0 chance touch to start
•Restart protection: a protective "gate" for unexpected power interruption

Flexible options for fast and easy bit changes
•manually use a wrench or the spindle lock

TARGET USERS

•General WW workshop
•Carpenters
•Window / Door Maker
•Renovators

PROtection Switch | Ø 6–8mm (1/4") | SOFT GRIP | CONSTANT SPEED | RESTART PROTECTION | VARIABLE SPEED

***70 pts

GOF 130 Professional	Unit	Specifications
Power	W	1,300
No-load speed	rpm	11,000 - 28,000
Bit holder	mm	6 - 8.0
Plunge depth	mm	55
Weight	kg	3.5

Glue Gun

GKP 200 CE
(0 601 950 703)

HEAVY DUTY
1 year warranty*

Capacity	
Gluing Capacity	: 30 g/min
No. of Heating Elements	: 2
Warming Up Time	: 4 min
Glue Stick Length	: 200 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 0.4 kg

Blower

GBL 620
(0 601 980 5L0)

***30 pts

Capacity	
Power Input	: 620 W
No-load Speed	: 16,000 rpm
Air Flow Rate	: 3.5 m³/min
Weight	: 1.7 kg

GBL 82-270
(0 601 980 4L1)

HEAVY DUTY
1 year warranty*

***40 pts

Capacity	
Power Input	: 800 W
No-load Speed	: 0 - 16,000 rpm
Air Flow Rate	: 0 - 4.5 m³/min
Weight	: 1.8 kg

Wet & Dry Vacuum Cleaner

GAS 15
(0 601 9E5 0L0)

HEAVY DUTY
1 year warranty*

***80 pts

Capacity	
Power Input	: 1,100 W
Container (gross/net)	: 15 / 8 litre
Air Flow Max.	: 33 l/sec
Max. Vacuum Pressure	: 22 kPa
Weight	: 6 kg

GAS 12-25 PL
(0 601 97C 1L0)

HEAVY DUTY
1 year warranty*

***110 pts

Capacity	
Power Input	: 1,250 W
Container (gross/net)	: 25/21 litre
Air Flow Max.	: 33 l/sec
Max. Vacuum Pressure	: 200 mbar
Weight	: 9.0 kg

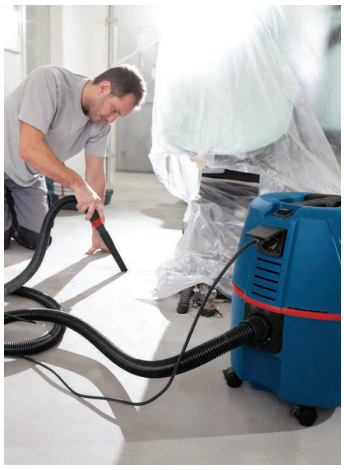

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitles to 6 months warranty. Term and Conditions apply. ** **Solo** - Bare Tools Only, Batteries, Charger and L-BOXX to Order Seperately. *** Points (Pts) applicable for BeConnected promotion. User have to purchase , scan or manual register participating tools and upload invoices before receiving Pts. Promo Period: 2nd Jan - 31st Mar 2021. Term and conditions apply.

GBH 220 Professional (0 611 2A6 0L0)

So Compact, So Powerful

NEW

WHY THIS

01 Powerful
Powerful 720 W motor and 2.0 J impact enerhy for effective hammer drilling in concrete

02 Versatility
Three-mode rotary hammer for hammer drilling, drilling, and chiselling – ensuring versatility and convincing results

03 Affordability
Compact rotary hammer offers professional Bosch hammer performance within reach

TARGET USERS

- Installer
- Electricians
- Renovators
- Carpenters

***60 pts

GBH 220 Professional	Unit	Specifications
Impact Energy	J	2
Power	W	720
No-load Speed	rpm	0- 2,000
Max. drilling & Concrete	mm	22
Mode	-	3
Weight	kg	2.3

2 kg Rotary Hammer

GBH 2-24 DRE (0 611 272 1L0)

HEAVY DUTY · 1 year warranty* · ELECTRONIC · SDS-plus

1 617 000 525 ***80 pts

Capacity	
Power Input	: 790 W
Impact Energy	: 2.7 J
In Concrete	: 4 - 24 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 920 rpm
Impact Rate	: 0 - 4,100 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.8 kg

GBH 2-24 DFR (0 611 273 0L1)

HEAVY DUTY · 1 year warranty* · ELECTRONIC · SDS-plus

1 617 000 525

Capacity	
Power Input	: 790 W
Impact Energy	: 2.7 J
Drilling Capacity	: 4 - 24 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 1,300 rpm
Impact Rate	: 0 - 4,200 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.8 kg

GBH 2-26 DRE (0 611 253 76C)

HEAVY DUTY · 1 year warranty* · ELECTRONIC · SDS-plus

1 617 000 525 ***120 pts

Capacity	
Power Input	: 800 W
Impact Energy	: 2.7 J
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.7 kg

GBH 2-26 DFR (0 611 254 76C)

HEAVY DUTY · 1 year warranty* · ELECTRONIC · SDS-plus

1 617 000 525 ***140 pts

Capacity	
Power Input	: 800 W
Impact Energy	: 2.7 J
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.9 kg

GBH 2-28 DFV (0 611 267 2L1)

HEAVY DUTY · 1 year warranty* · ELECTRONIC · SDS-plus · SDS max · Vibration Control

1 617 000 525 ***150 pts

Capacity	
Power Input	: 820 W
Impact Energy	: 3.2 J
In Concrete	: 4 - 28 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 1,300 rpm
Impact Rate	: 0 - 5,100 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.1 kg

3 kg Rotary Hammer

GBH 3-28 DFR (0 611 24A 0L0)

HEAVY DUTY · 1 year warranty* · ELECTRONIC · SDS-plus · ROTATION STOP · Vibration Control

1 617 000 525 ***200 pts

Capacity	
Power Input	: 800 W
Impact Energy	: 3.1 - 3.5 J
In Concrete	: 28 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.6 kg

4 kg Rotary Hammer

GBH 4-32 DFR (0 611 332 1L0)

HEAVY DUTY · 1 year warranty* · ELECTRONIC · SDS-plus · Vibration Control

1 614 321 079 ***vvvv320 pts

Capacity	
Power Input	: 900 W
Impact Energy	: 4.2 J
In Concrete	: 32 mm
In Steel	: 13 mm
In Wood	: 32 mm
No-load Speed	: 0 - 760 rpm
Impact Rate	: 0 - 3,600 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 4.7 kg

Rotary Hammer with SDS-Max

GBH 5-40 D (0 611 269 0L0)

HEAVY DUTY · 1 year warranty* · SDS max

1 617 031 245 ***340 pts

Capacity	
Power Input	: 1,100 W
Impact Energy (EPTA)	: 8.5 J
Max. App. in core cutter	: 90 mm
No-load Speed	: 170 - 340 rpm
Impact Rate	: 1,500 - 2,900 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 6.8 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitles to 6 months warranty. Term and Conditions apply. ** **Solo** - Bare Tools Only, Batteries, Charger and L-BOXX to Order Seperately. *** Points (Pts) applicable for BeConnected promotion. User have to purchase , scan or manual register participating tools and upload invoices before receiving Pts. Promo Period: 2nd Jan - 31st Mar 2021. Term and conditions apply.

GBH 5-40 DCE
(0 611 264 070)

HEAVY DUTY · 1 year warranty* · ELECTRONIC · CONSTANT ELECTRONIC · SDS max · Vibration Control · TURBO POWER · 1 617 014 144

Capacity	
Power Input	: 1,150 W
Impact Energy	: 2-11 J
Impact Rate	: 1,500 - 3,050 bpm
No-load Speed	: 170 - 340 rpm
Drilling Dia Concrete	: 12 - 40 mm
Vibration Values Drilling /Chiselling	: 10.5 / 7 / 5 m/s²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 6.8 kg

GBH 8-45 D
(0 611 265 1L0)

HEAVY DUTY · 1 year warranty* · ELECTRONIC · CONSTANT ELECTRONIC · SDS max · 1 617 000 A50 · ***440 pts

Capacity	
Power Input	: 1500 W
Impact Rate	: 1,380 - 2,760 bpm
Impact Energy	: 12.5 J
Drilling Dia Concrete	: 12 mm - 45 mm
Rated Speed	: 150 - 305 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 8.5 kg

GBH 8-45 DV
(0 611 265 0L0)

HEAVY DUTY · 1 year warranty* · ELECTRONIC · CONSTANT ELECTRONIC · SDS max · ***480 pts · Vibration Control · TURBO POWER · 1 617 014 145

Capacity	
Power Input	: 1500 W
Impact Rate	: 1,380 - 2,760 bpm
Impact Energy	: 12.5 J
Drilling Dia Concrete	: 12 mm - 45 mm
Vibration Values Drilling / Chiselling	: 8/7 m/s²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 8.5 kg

GSH 500 GEN II
(0 611 338 6L0)

***100 pts

Capacity	
Power Input	: 1,100 W
Impact Energy- EPTA Value	: 7.8J
Impact Rate	: 2,900 bpm
Tool holder	: Hex
Auxiliary Handle	: Straight Handle
Weight	: 5.6 kg

GSH 3 E
(0 611 320 703)

HEAVY DUTY · 1 year warranty* · ELECTRONIC · SDS-plus · 1 617 014 137 · ***170 pts

Capacity	
Power Input	: 650 W
Impact Rate	: 0-3,500 bpm
Impact Force	: 4.3 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.5 kg

GSH 5 (MAX)
(0 611 337 0L0)

HEAVY DUTY · 1 year warranty* · SDS max · 1 607 031 245 · ***170 pts

Capacity	
Power Input	: 1,100 W
Impact rate	: 2,850 bpm
Impact Energy	: 7.5 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 5.6 kg

GSH 5 CE
(0 611 321 0L0)

HEAVY DUTY · 1 year warranty* · ELECTRONIC · CONSTANT ELECTRONIC · SDS max · Vibration Control · 1 617 014 144 · ***270 pts

Capacity	
Power Input	: 1,150 W
Impact Rate	: 1,300 - 2,900 bpm
Impact Force	: 2 - 13 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 6.2 kg

GSH 9 VC
(0 611 322 0L0)

HEAVY DUTY · 1 year warranty* · CONSTANT ELECTRONIC · SDS max · Vibration Control · 1 617 000 A50 · ***400 pts

Capacity	
Power Input	: 1,500 W
Impact Force	: 13 J
Vibration Value	: 9.5 m/s²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 8.5 kg

GSH 11 E
(0 611 316 8L1)

HEAVY DUTY · 1 year warranty*

***390 pts

Capacity	
Power Input	: 1,500 W
Impact Energy	: 16.8 J
Impact Rate	: 900 - 1,890 bpm
Vibration Value	: 18.5 m/s²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 10.2 kg

GSH 11 VC
(0 611 336 0L0)

HEAVY DUTY · 1 year warranty* · CONSTANT ELECTRONIC · SDS max · Vibration Control · 1 617 000 750 · ***490 pts

Capacity	
Power Input	: 1,700 W
Impact Rate	: 900 - 1,700 bpm
Impact Force	: 23 J
Vibration Values Chiselling	: 8 m/s²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 11.4 kg

GSH 16-30 (HEX)
(0 611 335 1L0)

HEAVY DUTY · 1 year warranty* · Vibration Control · 1 617 014 143 · ***580 pts

Capacity	
Power Input	: 1,750 W
Impact Rate	: 1,300 bpm
Impact Force	: 45 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 16.5 kg

GSH 27 VC (Hex 25mm)
(0 611 30A 070)

HEAVY DUTY · 1 year warranty* · Vibration Control · 1 617 000 425 · ***1180 pts

Capacity	
Power Input	: 2,000 W
Impact Rate	: 1,000 bpm
Impact Force	: 69 J
Vibration Values Chiselling	: 8.5 m/s²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 29.5 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitles to 6 months warranty. Term and Conditions apply. ** **Solo** - Bare Tools Only, Batteries, Charger and L-BOXX to Order Seperately. *** Points (Pts) applicable for BeConnected promotion. User have to purchase , scan or manual register participating tools and upload invoices before receiving Pts. Promo Period: 2nd Jan - 31st Mar 2021. Term and conditions apply.

Rotary Hammers application overview

Masonry: Optimal Total range of all application Concrete: Optimal Total range of all application

	Products	Drilling diameter in concrete, masonry (mm)																									Drilling in wood (mm)				Drilling in steel (mm)	
		4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	up to 20	20-25	25-30	30-40	up to 10	10-13
2 kg Hammers	**GBH 220** Professional																															
2 kg Hammers	**GBH 2-24 DRE** Professional																															
2 kg Hammers	**GBH 2-24 DFR** Professional																															
2 kg Hammers	**GBH 2-26 DRE** Professional																															
2 kg Hammers	**GBH 2-26 DFR** Professional																															
2 kg Hammers	**GBH 2-28 DFV** Professional																															
2 kg Cordless Hammers	**GBH 180-LI** Professional																															
2 kg Cordless Hammers	**GBH 18 V-26** Professional																															
2 kg Cordless Hammers	**GBH 36 V-LI PLUS** Professional																															
2 kg Cordless Hammers	**GBH 36 V-LI Compact** Professional																															
3 kg Hammer	**GBH 3-28 DFR** Professional																															
4 kg Hammer	**GBH 4-32 DFR** Professional																															
5 kg Hammer	**GBH 5-40 DCE** Professional																															
8 kg Hammer	**GBH 8-45 D / DV** Professional																															

Optimal Possible Optimal Possible Drilling Chiselling

Drilling with hole saws in wood (mm)				Core cutting application in masonry, concrete (mm)				Material for drilling						Other characteristics		
up to 30	30-40	40-50	50-70	40-68	68-82	82-90	90-150	Reinforced concrete, granite, stone	Concrete	Bricks, hollow blocks	Hard wood	Soft wood	Metal	Drilling/ Chiselling ratio	Working direction	Special features
■								■	■	■	■	■	■	90% 10%		
■	■							■	■	■	■	■	■	90% 10%		
■	■							■	■	■	■	■	■	90% 10%		**Quick change chuck**
■	■	■						■	■	■	■	■	■	90% 10%		
■	■	■						■	■	■	■	■	■	90% 10%		**Quick change chuck**
■	■	■						■	■	■	■	■	■	90% 10%		**Quick change chuck** Vibration Control
■								■	■	■	■	■	■	90% 10%		BRUSHLESS MOTOR, powered by Li-Ion technology
■	■	■						■	■	■	■	■	■	90% 10%		BRUSHLESS MOTOR, powered by Li-Ion technology, Vibration Control
■	■	■						■	■	■	■	■	■	90% 10%		powered by Li-Ion technology, Vibration Control
■	■	■						■	■	■	■	■	■	100%		BRUSHLESS MOTOR, powered by Li-Ion technology, Vibration Control
■	■	■						■	■	■	■	■	■	80% 20%		**Quick change chuck** Vibration Control
■	■	■						■	■	■	■	■	■	70% 30%		**Quick change chuck** Vibration Control
								■	■	■				60% 40%		Vibration Control
								■	■	■				50% 50%		Vibration Control Anti Vibration for GBH 8-45 DV only

Demolition Hammers application overview

■ Optimal ■ Possible

	Specification								
	Power	Weight	Impact energy	Tool holder	Working direction	Wall tile removal	Floor tile removal	Joint repair (removal of excess concrete)	De-plastering (removing cement plaster from the walls)
GSH 3 E Professional	650 W	3.5 kg	4.3 J	SDS-plus		■	■	■	■
GSH 5 Professional	1100 W	5.6 kg	7.5 J	SDS-max		■	■	■	■
GSH 500 (GEN II) Professional	1100 W	5.5 kg	6.8 J	17 mm Hex		■	■	■	■
GSH 5 CE Professional	1150 W	6.2 kg	2-13 J	SDS-max		■	■	■	■
GSH 9 VC Professional	1500 W	8.5 kg	13 J	SDS-max		■	■	■	■
GSH 11 E Professional	1500 W	10.1 kg	6-25 J	SDS-max			■	■	■
GSH 11 VC Professional	1700 W	11.4 kg	23 J	SDS-max			■	■	■
GSH 16-30 Professional	1750 W	16.7 kg	45 J	30 mm Hex					
GSH 27 VC Professional	2000 W	29.5 kg	69 J	28 mm Hex					

Accessories			Wall tile removal	Floor tile removal	Joint repair	De-plastering
Pointed chisel	SDS plus/SDS max/Hex 17/Hex 28/Hex 30		■	■	■	■
Flat chisel	SDS plus/SDS max/Hex 17/Hex 28/Hex 30		■	■	■	■
Tile chisel	SDS plus/SDS max		■	■		
Spade chisel	SDS plus/SDS max/Hex 28/Hex 30		■	■	■	■
Gouging chisel	SDS plus/SDS max					
Bush hammer head	SDS max					
Asphalt cutter	SDS max					
Tamping plate	SDS max/Hex 28/Hex 30					
Excavation chisel	SDS max/Hex 30					

Application										
Roughing of concrete walls, columns	Wall chasing or groove cutting on masonry, cement blocks, concrete walls	Concrete wall corrections	Column & beam corrections (removing bulge, exposing re-enforcements)	Making cut outs or breaches in masonry wall	Hacking of concrete & masonry walls (heavy duty)	Demolition of concrete floor, slabs	Foundation breaking, pavement breaking	Road works (Restoration of Asphalt coverings)	Digging in hard compacted soil	Compacting earth & gravel
	■									
■	■	■	■	■	■					
■	■	■	■	■	■					
■	■	■	■	■	■					
■	■	■	■	■	■					
■			■	■	■	■	■	■		
■			■	■	■	■	■	■		
						■	■	■	■	■
							■	■	■	■
		■	■	■	■	■	■	■		
	■	■	■	■	■	■	■	■	■	
	■									
■										
								■		
										■
									■	

Dust Free Solution

The Click & Clean System is not only perfectly thought through, it is also really easy to use: connect the dust extractor and start working! This overview offers you a helpful guide to the tools, part numbers and extras succh as adapters and accessories. You will also find mobile solutions for individual systems.

Listed adapters need to work with vacuum cleaner unless special remarked

Product	Model / Application	Adapter No.	Adapter Picture	Application Picture
GWS Series  *T: Guard assembly Toolless *EA: Easy Adjust *FC: Full Coverd	Disc 100 mm Disc 115 / 125 mm Keyless	2 608 000 629 2 605 510 224		
	Disc 115 / 125 mm Max. cutting depth 25 mm	GDE 125 EA-T 1 600 A00 3DJ		
	Disc 125 mm Max. cutting depth 25 mm Disc 230 mm Max. cutting depth 60 mm	GDE 125 FC-T 1 600 A00 3DK GDE 230 FC-T 1 600 A00 3DM		
GSB Series 	For all GSB & GBH Holes Ø4-36 mm Holes or core cutter Ø4-24 mm	Dust Cup 1.600.A00.D6H Work without vacuum GDE 24 1 600 A01 M9V Work with or without vacuum	Dust Cup GDE 24	
	For all GSB & GBH & GBM Holes or core cutter Ø4-68 mm Holes or core cutter Ø24-162 mm	GDE 68 1 600 A00 1G7 GDE 162 1 600 A00 1G8	GDE 68 GDE 162	
GBH Series 	For 50 mm collar tool Holes Ø4-16 mm Or max 82 mm core cutter (Interchangeable adapter included)	GDE 16 Plus 1 600 A00 15Z		
	Only for GBH 18V-26 Holes Ø4-16 mm	GDE 18V-16 1 600 A00 51M *Self vacuum		
GSH Series 	For chiseling Max length 600 mm	GDE Max 1 600 A00 1G9		
	For breaking	GDE HEX 1 600 A00 1GA		
GST Series 	GST 12 V-LI GST 700	1 619 P10 585 Dust adapter included		
GKS Series 	GKS 190 GKS 7000 GKS 12 V-Li GKS 66 X / GKS 18 V-57	1 619 P06 204 1 619 P11 691 1 619 P13 436 1 619 P11 691		

BOSCH

Measuring Tools Range

Laser Rangefinder

	GLM 30 Professional	GLM 40 Professional	GLM 500 Professional	GLM 50 C Professional	GLM 80 Professional	GLM 100 Professional	GLM 150 C Professional	GLM 250 VF Professional	
	30 m	40 m	50 m	50 m	80 m	100 m	150 m	250 m	
Typical measuring accuracy	± 2.0 mm		± 1.5 mm	± 1.5 mm	± 1.5 mm	± 1.5 mm	± 1.5 mm	± 1 mm	±
Memory + constant	—	10	20 + 1	30 + 1	20 + 1	20 + 1	50	30	
LI-ION	—	—	—	—	●	●	—	—	LI-ION
Distance, area and volume measurement	—	●	●	●	●	●	●	●	
Continuous measurement	—	●	●	●	●	●	●	●	
Addition/subtraction	—	●	●	●	●	●	●	●	+/-
Corner measuring pin	—	—	—	●	●	●	●	●	
Wall area measurement	—	—	—	●	●	●	●	●	
Timer function	—	—	—	—	●	●	●	●	
Min./max. function	—	—	—	●	●	●	●	●	min/max
Incline measurement	—	—	—	●	●	●	—	—	
Indirect distance measurement	—	—	—	●	●	●	—	—	
Single indirect height measurement	—	●	●	●	●	●	●	●	
Double indirect height measurement	—	—	—	●	●	●	●	●	
Stake-out function	—	—	—	●	—	—	●	●	
Trapezium measurement	—	—	—	—	—	—	●	●	
Integrated viewfinder	—	—	—	—	—	—	—	●	
Bluetooth data transfer	—	—	—	●	—	—	●	—	
USB data transfer	—	—	—	●	—	—	—	—	

BOSCH

3 X 360° GREEN LINE LASER – ALL-ROUND LEVELLING SOLUTION

The GLL 3-60 XG Professional

It's in your hands. Bosch Professional Measuring Tools.

bosch-pt.asia

NEW!

GLL 3-60 XG Professional

3 x 360˚ Green line laser — All-round levelling solution

WHY THIS

01 All-round solution

3 x 360˚ green line laser with 1 horizontal and 2 vertical lines for your everyday levelling needs

02 Visible

Up to 4 times more visible to human eyes compared to red laser thanks to Bosch green laser technology

03 Compact

Slim cone mirror and turret design designated to fulfil various applications including evening concrete plaster

HIGHLIGHTS

TARGET USERS : Carpenters | Drywall constructors | Electricians | Floor layers | Plumber | Joiner

Visible

Up to 4 times more visible to human eyes compared to red laser thanks to Bosch green laser technology

Compact

Slim cone mirror and turret design designated to fulfil various applications including evening concrete plaster

Levelled assurance

Signal tone function with warning signal if deviation by more than 3˚ in self-levelling mode

All-round solution

3 x 360˚ green line laser with 1 horizontal and 2 vertical lines for your everyday levelling needs

Robust

IP 54 rated against splash water and dust together with pendulum lock mechanism for extra protection

Optional accessories:

Laser Receiver LR 7

0.601.069.J00

Universal Mount BM 1

0.601.015.A01

Laser Glasses

1.608.M00.05J

Tripod BT 150

0.601.096.B00

GLL 3-60 XG Professional	Unit	Specifications
Part number	-	0.601.063.ZK0
Working range	m	30 (radius)
Working range (with laser receiver)	m	60 (radius)
Levelling accuracy	mm/m	± 0.3*
Self levelling range	°	± 3
Tripod thread size	"	1/4 & 5/8
Dust and splash water protection	-	IP 54
Laser class	-	2
Laser type	nm, mW	500 - 540, <10
EPTA weight	kg	0.78
Dimensions	mm	149 x 84 x 142
Power supply	-	4 x 1.5V LR6 (AA) batteries
Scope of delivery	-	Protective bag, hard carrying case, 4 x AA alkaline batteries, target plate

* plus use-dependent deviation (levelling accuracy)

Laser Rangefinder

GLM 30
(0 601 072 5K0)

Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.15 - 30 m
Measuring Accuracy	: ± 2.0 mm
Measuring Units	: m / ft
Batteries	: 2 x 1.5 V LR03(AAA)
Weight	: 0.1 kg

GLM 40
(0 601 072 9K0)

Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.15 - 40 m
Measuring Accuracy	: ± 2.0 mm
Measuring Units	: m / ft
Batteries	: 2 x 1.5 V LR03(AAA)
Weight	: 0.1 kg

GLM 400
(0 601 072 RK0)

NEW!

Capacity	
Laser Diode	: 635 nm, < 1 mW
Measurement Range	: 0,05 – 40,00 m
Measurement Accuracy, Typical	: ±1.5 mm
Weight	: approx. 0,1 kg

GLM 500
(0 601 072 HK0)

Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 50 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: m, cm, ft, in
Batteries	: 2 x 1.5V LR03 (AAA)
Weight	: 0.1 kg

GLM 50 C
(0 601 072 CK0)

Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 50 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: m, ft, in
Batteries	: 2 x 1.5 V LR03(AAA)
Weight	: 0.1 kg

GLM 80
(0 601 072 370)

Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 80 m
Measuring Accuracy	: ± 1.5mm
Measuring Units	: mm, cm, m, ft, in
Batteries	: Lithium-Ion
Weight	: 0.14 kg

GLM 100
(0 601 072 P40)

Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 100 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: m, cm, ft, in
Batteries	: Lithium-Ion
Weight	: 0.14 kg

GLM 150 C
(0 601 072 FK0)

Capacity	
Laser Diode	: 650 nm, <1mW
Measuring Range	: 0.08 - 150 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: m, cm, ft, in
Batteries	: 3 x 1.5V LR03 (AAA)
Weight	: 0.21 kg

GLM 250 VF
(0 601 072 170)

Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 250 m
Measuring Accuracy	: ± 1 mm
Measuring Units	: m, cm, ft, in
Batteries	: 4 x 1.5 V LR03(AAA)
Weight	: 0.24 kg

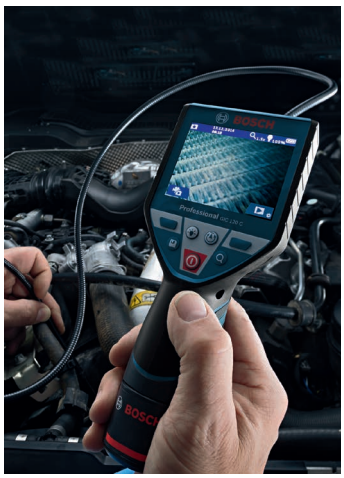

Cordless Inspection Camera

GIC 120
(0 601 241 100)

Capacity	
Batteries	: 4 x 1.5 V (AA)
Display size	: 2.7"
Display Resolution	: 320 x 240 px
Dia.of camera head	: 8.5 mm
Length of camera cable	: 120 cm
Weight	: 0.5 kg

GIC 120 C
(0 601 241 2K0)

Capacity	
Batteries	: 4 x 1.5 V (AA) or 10.8 V-LI
Display size	: 3.5"
Display resolution	: 320 x 240 px
SD card storage	: Yes
Photo & video mode	: Yes
Dia.of camera head	: 8.5 mm
Length of camera cable	: 120 cm
Weight	: 0.6 kg

Detector

GMS 120
(0 601 081 000)

Capacity	
Max. Measuring Depth	: 120 mm
Live cables	: 50 mm
Wooden beams	: 38 mm
Metal (magnetic)	: 120 mm
Metal (non-magnetic)	: 80 mm
Batteries	: 1 x 9 V 6LR61
Weight	: 0.27 kg

D-tect 120
(0 601 081 3K0)

Capacity	
Detection Mode	: Universal, Concrete, Drywall
Detection Object	: Ferrous metals, non-ferrous metals, live cables, wooden objects and water-filled plastic pipes
Max. Detection Depth	: 120 mm
Accuracy	: ± 10 mm
Batteries	: 4 x 1.5 V LR6(AA) or 10.8 V
Weight, approx	: 0.5 kg

* The working range can be decreased by unfavorable environment conditions (eg. Direct sun irradiation).

Thermo Detector

D-tect 150 SV (0 601 010 008)

Capacity	
Max. Measuring Depth	: 150 mm
Accuracy	: ± 5 mm
Batteries	: 4 x 1.5V LR6(AA)
Detectable Materials	: Plastic pipes, cables of all kinds, ferrous/non-ferrous metals, wood, cavities.
Weight	: 0.7 kg

GIS 500 PROFESSIONAL (0 601 083 480)

Capacity	
Measurement Range*	: -30°C to +500°
Measurement Accuracy	: ±1.8°C / ±2.8°C
Emissivity gradings	: 0.95, 0.85, 0.75
D:S ratio	: 12:1
Display Size	: 36 mm x 25 mm
Power Supply	: 2 x 1.5V LR6 (AA)
Scope of Delivery	: 2 x AA battery, pouch

GIS 1000 C (0 601 083 340)

Capacity	
Laser Diode	: 635 nm, <1mW
Working Range*	: 0.1 - 5 m
Measuring Range*	: - 40°C to + 1000°C
Measuring accuracy	: ± 1.0°C (0°C - 100°C)
Batteries	: 4 x 1.5 V LR6(AA) / 10.8 V
Relative Humidity	: 0 - 100 %
Accuracy	: ± 2 %
Storage Medium	: 200 images
Weight	: 0.6 kg

GTC 400 C (0 601 083 150)

Capacity	
Resolution of infrared sensor	: 160 x 120
Thermal Sensitivity	: < 50 mK
Field of View	: 53° x 43°
Focus Distance	: ≥ 0.3 m
Temperature Range	: -10 ~ +400°C
Measurement Accuracy	: ± 3°C
Weight	: 0.54 kg

Line Laser

GLL 3-80 (0 601 063 S00)

Capacity	
Laser Diode	: 640 nm, <1mW
Working Range*	: 30 m
Working Range With Receiver*	: 5 - 120 m (diameter)
Leveling Accuracy*	: ± 0.2 mm / m
Plane	: 3
Tripod Mount	: 1/4", 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 0.76 kg

GLL 3-60 XG (0 601 063 ZK0)

Capacity	
Working Range*	: 30 m (Radius)
Working range With Receiver*	: 60 m (Radius)
Levelling Accuracy	: ±0.3 mm/m*
Self-levelling Range/Time	: ± 3° / <4 sec
Laser Class & Type	:Class 2; 500-540nm, <10mW
Batteries	:4 x 1.5 V LR6(AA)
Tripod Mount	: 1/4 & 5/8"
Weight	: 0.78 kg

GLL 3-80 CG (0 601 063 U80)

Capacity	
Laser Class and Type	: Class 2 (500 - 540 nm, <10mW)
Working Range*	: 5 - 120 m
Leveling Accuracy*	: ± 0.2 mm / m
Self-levelling Range	: ± 4°
Tripod Mount	: 1/4 & 5/8"
Batteries	: 4 x 1.5 V LR6(AA) or 10.8 V / 12 V Li-Ion Battery
Weight	: 0.5 kg

GLL 30 G (0 601 063 V80)

Capacity	
Laser Diode	: 500 - 540 nm, <5mW
Working Range	: 10 m
Leveling Accuracy*	: ± 4°
Tripod Mount	: 1/4"
Batteries	: 2 x 1.5 V LR6(AA)
Weight	: 0.25 kg

GLL 3-15 X (Bare) (0 601 063 M80)

Capacity	
Laser Diode	: 630 - 650 nm, <1mW
Working Range*	: 15 m
Leveling Accuracy*	: ± 0.2 mm / m
Self-levelling Range	: ± 3°
Tripod Mount	: 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 0.5 kg

GLL 5-50 X (Kit Set) (0 601 063 N81)

Capacity	
Laser Diode	: 630 - 650 nm, <1mW
Working Range*	: 15 m
Working Range With Receiver*	: 5 - 50 m
Leveling Accuracy*	: ± 0.2 mm / m
Self-levelling Range	: ± 3°
Tripod Mount	: 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 0.5 kg

Electronic Line Laser

GLL 8-40 E (0 601 063 HB1)

Capacity	
Laser Diode	: 635 - 650 nm, <1mW
Working Range*	: 15 m
Working Range With Receiver*	: 40 m
Leveling Accuracy	: ± 0.1 mm / m
Self-levelling Range	: ± 3°
Tripod Mount	: 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 1.1 kg

Combi Laser

GCL 2-15 G (0 601 066 J00)

Capacity	
Laser Diode	: 500 - 540 nm, <10mW, 635 - 650 nm, <1mW
Working Range*	: 15 m
Dust and splash protection	: IP 54
Leveling Accuracy	: ± 0.3 mm / m
Self-levelling Range	: ± 4°
Tripod Mount	: 1/4", 5/8"
Batteries	: 3 x 1.5 V LR6 (AA)
Weight	: 0.49 kg

GCL 2-50 CG (0 601 066 H80)

Capacity	
Laser Diode	: 500 - 540 nm, <10mW, 635 - 650 nm, <1mW
Working Range*	: 50 m
Dust and splash protection	: IP 54
Leveling Accuracy	: ± 0.3 mm / m
Self-levelling Range	: ± 4°
Tripod Mount	: 1/4"
Batteries	: 4 x 1.5 V (AA) or Bosch Li-Ion 10.8 V / 12 V Li-Ion Battery
Weight	: 0.58 kg

Rotation Laser

GRL 350 HV (0 601 041 S40)

Capacity	
Laser Diode	: 630 - 650 nm, <5mW
Working Range Without Laser Receiver	: 60 m (Diameter)
Working Range With Laser Receiver	: 350m(Diameter)
Levelling accuracy	: ±0.1 mm/m*
Self-levelling Range/Time	: ± 5°
Laser class	: 3R
Batteries	: 2xD-cell Batteries
Rotational speed	: 0/150/300/600 min-1
Weight	: 1.76 kg

* The working range can be decreased by unfavorable environment conditions (eg. Direct sun irradiation).

Tile Laser

GTL 3
(0 601 015 200)

Capacity	
Laser Diode	: 635 nm, <1mW
Laser Class	: 2
Accuracy	: ± 0.2 mm / m
Accuracy between 45° and 90° - Line	: ± 0.4 mm / m
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 0.5 kg

Optical Level

GOL 26 D
(0 601 068 000)

Capacity	
Magnification	: 26x
Levelling Accuracy	: 1.6 mm / 30 m
Working Range	: 100 m
Dust and Splash Protection	: IP 54
Weight	: 1.7 kg

GOL 32 D
(0 601 068 500)

Capacity	
Magnification	: 32x
Levelling Accuracy	: 1 mm / 30 m
Working Range	: 120 m
Dust and Splash Protection	: IP 54
Weight	: 1.7 kg

Angle Measurer

GAM 220
(0 601 076 500)

Capacity	
Measurement Range	: 0 - 220°
Accuracy, Angles	: ± 0.1°
Leg Length	: 40 cm
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 1.3 kg

Digital Inclinometer

GIM 60 L
(0 601 076 900)

Capacity	
Measurement Range	: 0 - 360°(4 x 90°)
Laser working range	: 30 m
Electronics Measurement Accuracy 0° / 90°	: ± 0.05°
Electronics Measurement Accuracy at 1° - 89°	: ± 0.2°
Batteries (Grade measurement):	1 x 9V 6LR61
(Laser Operation)	2 x AAA LR03
Weight	: 0.9 kg

GIM 120
(0 601 076 800)

Capacity	
Measurement Range	: 0 - 360° (4 x 90°)
Electronics Measurement Accuracy 0° / 90°	: ± 0.05°
Electronics Measurement Accuracy at 1° - 89°	: ± 0.2°
Length	: 1250 mm
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 1.4 kg

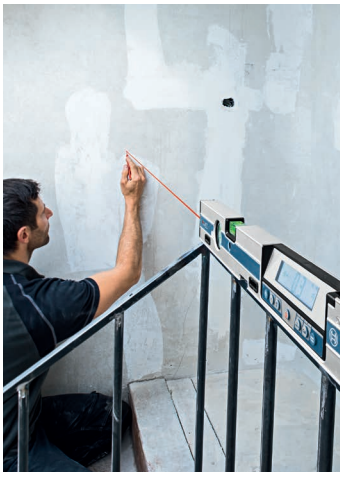

Laser Receiver

LR 5 (for GLL 5-40 E / GLL 8-40 E)
(0 601 069 G80)

Capacity	
Working Range	: 5 - 40 m
Batteries	: 1 x 9 V 6LR61
Dust & Splash Protection	: IP 54

LR 6 (for GLL 5-50 X / GLL 3-80)
(0 601 069 H00)

Capacity	
Working Range	: 5 - 50 m
Dust & Splash Protection	: IP 54
Measurement Accuracy (fine/Rough)	: ± 1 mm / ± 3 mm
Batteries	: 2 x 1.5 V LR03 (AAA)
Weight	: 0.2 kg

LR 7 (for GCL 2-50 CG / GLL 3-80 CG)
(0 601 069 J00)

Capacity	
Working Range	: 5 - 50 m
Dust & Splash Protection	: IP 54
Measurement Accuracy (fine/Rough)	: ± 1 mm / ± 3 mm
Batteries	: 2 x 1.5 V LR6 (AA)
Weight	: 0.15 kg

Tripod

BT 150 (1/4")
(0 601 096 B00)

Capacity	
Work Height	: 55 - 157 cm
Tripod Thread	: 1/4"
Weight	: 1.3 kg

BT 150 (5/8")
(0 601 096 C80)

Capacity	
Work Height	: 52 - 154 cm
Tripod Thread	: 5/8"
Weight	: 1.1 kg

* The working range can be decreased by unfavorable environment conditions (eg. Direct sun irradiation).

Tripod

BT 160
(0 601 091 200)

Capacity	
Work Height	: 97 - 160 cm
Tripod Thread	: 5/8″
Weight	: 4.1 kg

BT 170 HD
(0 601 091 300)

Capacity	
Work Height	: 107 - 165 cm
Tripod Thread	: 5/8″ x 11
Weight	: 5.5 kg

Optical Level Measuring Rod

GR 240
(0 601 094 100)

Capacity	
Length	: 2.4 m
Unit Of Measure	: m / cm
Weight	: 1.3 kg

GR 500
(0 601 094 300)

Capacity	
Length	: 5.0 m
Unit Of Measure	: m / cm
Weight	: 1.98 kg

BT 350 (c/w bracket & holder)
(0 601 015 B00)

Capacity	
Max Height	: 140 - 350 cm
Weight	: 2.5 kg

Accessories

RM 3 + RC 2 (for GCL 2-50 CG)
(0 601 092 800)

Capacity	
Height	: 120 mm
Length	: 135 mm
Weight	: 0.500 kg

Universal Holder

BM 1
(0 601 015 A01)

Capacity	
Mount Thread	: 1/4″
Weight	: 0.5 kg

Bracket

Bracket (for LR 1, LR 1 G, LR 5)
(1 608 M00 70F)

Bracket (for LR 6)
(1 608 M00 C1L)

* The working range can be decreased by unfavorable environment conditions (eg. Direct sun irradiation).

BOSCH

GHP – Professional High pressure washers
GHP 5-13 C (0 615 990 M3A)

HEAVY DUTY

1 year warranty*

Venturi detergent system

Adjustable pressure system and gauge for ultimate flexibility in cleaning tasks

Powerful, long-life induction motor 2.3kw

New gun design with lance screw connector coupling

Robust and reliable crankshaft brass pump

Compact but powerful design, excellent size to power ratio

Ceramic coated pistons

Brass inlet and outlet pipe for long life

	Unit	Specifications
Max Pressure	bar	140
Rated Pressure	bar	130
Rated/Max Flow rate	l/hr	450 / 500
Weight	kg	16.5
Hose lenght	m	8
Lance	-	3-in-1 adjustable vario-fan-jet
Voltage	V	230V (EU) / 240V (UK)

	EASY		UNIVERSAL		ADVANCED (Induction motor)	
	Easy Aquatak 100 (0 600 8A7 EL0)	**Easy Aquatak 110 (0 600 8A7 FL0)**	**Universal Aquatak 125 (0 600 8A7 AL0)**	**Universal Aquatak 130 (0 600 8A7 BL0)**	**Advanced Aquatak 140 (0 600 8A7 DL0)**	**Advanced Aquatak 150 (0 600 8A7 7L0)**
Pressure (bar)	100	110	125	130	140	150
Flow Rate (1/h)	300	330	360	380	450	500
Motor Power (W)	1,200	1,300	1,500	1,700	2,100	2,200
Max. Pressure (bar)	100	110	125	130	140	150
Max. Temp (°C)	40	40	40	40	40	40
Voltage (V)	220 / 240	220 / 240	220 / 240	220 / 240	220 / 240	220 / 240
Frequency (Hz)	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60
Weight (Kg)	3.0	3.8	6.8	7.8	17.6	22.5
Hose (m)	3	3	5	6	8	8
Self-priming Capable	Yes	Yes	Yes	Yes	Yes	Yes
Accessories Inside Package	- Bosch 360 Gun - High Pressure Detergent Nozzle (350ml) - 3m Hose	- Rotary nozzle - Variable nozzle - High Pressure Detergent Nozzle (450ml) - Water Filter - High Pressure Gun - Lance - High Pressure Hose 3m	- Trio nozzle - Clear New Water Filter - High Pressure Detergent Nozzle (450ml) - Bosch Gun - Standard Lance - High Pressure Hose 5m	- Trio nozzle - Rotary nozzle - Water Filter - High Pressure Detergent Nozzle (450ml) - Bosch Gun - Standard Lance - High Pressure Hose 6m Length	- High Pressure Detergent Nozzle (550ml) - Water Filter - Bosch Gun - Variable Fan Jet - Rotatory Nozzle - Standard Lance - 8m PU High Pressure Hose	- High Pressure Detergent Nozzle (550ml) - 60 ° Fixed Fan Jet nozzle - Variable Fan Jet Lance - Standard Lance - Hose 8m (Steel armed) - Cable 5m - Bosch Gun - High Pressure Hose Reel - Roto Lance

High Pressure Cleaner Accessories

Rotary Nozzle
(F 016 800 580)

- Aquatak 110, 120, 125, 130 and AQT 42-13

90° Nozzle
(F 016 800 581)

- Aquatak 110, 120, 125, 130, AQT 42-13 and 45-14 X

Trio Nozzle
(F 016 800 508)

- Aquatak 110, 120, 125, 130 and AQT 42-13

Vario Fan Jet Nozzle
(F 016 800 582)

- Aquatak 110, 120, 125, 130 and AQT 42-13

450 Detergent Nozzle
(F 016 800 509)

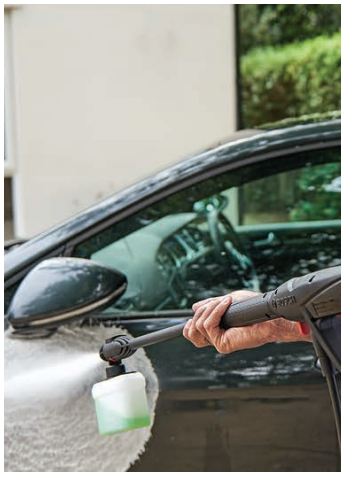

- All AQT range

Bosch 360 Gun
(F 016 800 536)

- Aquatak 100, 110, 120, 125, 130

AquaSurf 250 Patio Cleaner
(F 016 800 486)

- Aquatak 110, 120, 125, 130

Suction Nozzle
(F 016 800 356)

- Aquatak 110, 120, 125, 130, AQT 42-13 45-14 X and 150

Wash Brush
(F 016 800 359)

- Aquatak 110, 120, 125, 130, AQT 42-13 45-14 X and 150

Water Filter
(F 016 800 577)

- Aquatak 100, 110, 120, 125, 130 and AQT 42-13

Self-priming Kit (with Filter)
(F 016 800 421)

- All AQT range

Drain Pipe Cleaner 10 m
(F 016 800 362)

- Aquatak 100, 110, 120, 125, 130 and AQT 42-13

High Pressure Hose 6 m
(F 016 800 360)

- Aquatak 100, 110, 120, 125, 130 and AQT 42-13

Extension Hose 6 m
(F 016 800 361)

- Aquatak 100, 110, 120, 125, 130 and AQT 42-13

Car Cleaning Kit
(F 016 800 572)

- Aquatak 100, 110, 120, 125, 130 and AQT 42-13

Adaptor for Karcher Accessories
(F 016 800 575)

- Aquatak 100, 110, 120, 125, 130 and AQT 42-13

Grass Shear

Easy Shear
(0 600 833 300)

Capacity	
Battery Type	: Lithium-ion
Battery Voltage	: 3.6 V
Works with battery capacity	: 1.5 Ah
No-load runtime	: Up to 40 mins
Battery charge time	: 3 h
Shrub blade length (cm)	: 12 cm
Grass shear width (cm)	: 8 cm
Tooth spacing	: 8 mm
Area cut per battery charge, max	: 22 m2
Weight (g)	: 530g

Hedgecutter

Universal Hedgecut 50
(0 600 8C0 570)

Capacity	
Motor Power	: 480 W
Blade Length	: 50 cm
Tooth Opening	: 26 mm
No-load Stroke Rate	: 3.400 sPM
Cable Line	: 10 m
Sound Power Leve	: 91 dB(A)
Weight	: 3.5 kg

Grass Trimmer

Easy GrassCut 23
(0 600 8C1 H70)

Capacity	
Motor Power	: 280 W
Cutting Size	: 23 cm
Cutting System	: Semi-auto Spool
Cutting Speed	: 12.500 rpm
Spool	: 1.6 mm x 4 m
Spool P/N	: F016800569
Weight	: 1.9 kg
Tool Dimensions (L x W x H)	: 790 x 263 x 902mm
Weight Packed	: 2.6 kg

Lawn Mower

AHM 38 G
(0 600 886 103)

Capacity	
Min Cutting Height	: 15 mm
Cutting Height	: 15 - 43 mm
Cutting Width	: 38 cm
Blade	: 5 Bladed Cylinder
Roller	: Yes
Self Propelling	: No
Fuel Type	: Electric Cordless
Product Dimensions (L x W x H)	: 540 x 490 x 380mm
Grass Box Capacity	: 25 Litres
Grass Box P/N	: 0 600 886 160
Weight	: 7.5 kg

Rotak 32-12 (Corded)
(0 600 8A6 078)

Capacity	
Motor	: Powerdrive
Motor Power	: 1.200 W
Torque	: 13 Nm
Cutting Height	: 20 – 60 mm; 3-fold
Grass Combs	: Yes
Grass Box Capacity	: 31 L
Handle Type	: Standard
Integrated carrying handles	: No
Cutting System	: Rotary Blade
Power Cable	: 10m
Blade Width	: 32 cm
Blade P/N	: F 016 800 340
Weight	: 6.8 kg

SERVICE

Warranty

This serves to inform you that all **Bosch** Power Tools are guaranteed against manufacturing defects for a period **6 months** from the registered date of purchase **(Bosch Measuring Tools, GHP Range High Pressure Washer and HEAVY DUTY Range Power Tools are entitled to 1 Year Warranty, Only Bosch Hot Air Guns, Bosch Batteries, Bosch Chargers, Bosch Aquatak High Pressure washer and Garden Tools are entitled to 6 months warranty. 1 Year Warranty only applicable for purchases made from 1st June 2016 onwards. Term and Conditions apply).** For the same defect repair within warranty period, a maximum **3 times** warranty repair are allowed for **Bosch** Power Tools, **2 times** for **Bosch** Measuring Tools and **Bosch** Home & Garden Tools. This guarantee, however, does not cover damage caused by accident, misuse, unauthorized repairs, tampering, normal wear & tear, additions and modifications made to the tool in any manner. In case of complaint, please send the tool, undismantled together with official proof of purchase, i.e. **tax invoice or receipt stated with tool's serial no.**, to **Bosch Power Tools Authorised Service Centre.**

Jaminan

Dimaklumkan bahawa tempoh jaminan untuk Alat-alat kuasa **Bosch** akibat kecacatan product semasa pengilangan adalah terhad kepada **6 bulan sahaja** bermula tarikj pembelian **(Alat Pengukur Bosch, Siri Pencuci Tekanan Tinggi GHP Bosch dan Siri HEAVY DUTY Alat-alat Kuasa Bosch Produk tempoh jaminannya 1 Tahun Hanya Alat Pengering Bosch, Bateri Bosch, Pengecas Bateri Bosch, Pembersih tekanan tinggi dan Alat Kebun Tempoh Jaminannya 6 bulan. Tempoh Jaminan 1 Tahun hanya untuk pembelian bermula dari 1hb Jun 2019. Tertakluk kepada Terma and Syarat).** Jumlah maksimum pembaikian dalam tempoh jaminan adalah terhad kepada **3 kali** sahaja untuk Alat-alat kuasa **Bosch, 2 kali** sahaja untuk Alat-alat Pengukur **Bosch** dan Alat-alat Kuasa Halaman **Bosch.**
Tempoh jaminan ini tertakluk kepada kerosakan akibat kemalangan, penyalahgunaan, membaikpulih yang tidak diakui, haus yang sepatut ada dan pengubahsuaian yang mengakibatkan kerosakan Alat-alat kuasa tersebut.
Bagi sebarang pengaduan, sila hantar Alat-alat Kuasa dan **tax invois rasmi** atay resit rasmi sebagai bukti pembelian yang dilengkapi dengan nombor siri Alat-alat Kuasa ke **Pusat Servis Alat-alat Kuasa Bosch Yang Sah.**

保证

谨此通知阁下有关所有**博世**电工工具享有为期六个月之生产损坏保证，有效期从购买登记日算起**（博世测量仪器，博世GHP 高压清洗机系列及博世 HEAVY DUTY系列产品享有1年保证，除了博世热风机，博世电池，博世充电器，高压清洗机和园林工具享有6个月保证。1年保证有效期从1-6-2016选购开始。附带条规）**。在维修保证期间，**博世**电动工具享有高达三次维修，**博世**测量仪器及**博世**家园电动工具享有**两次**维修。无论如何，上述保证并不包括有关电动工具因意外、错误使用、非授权维修、正常的磨损、附加及修换或其他方式所造成的损坏及故障。若有任何投诉，请将阁下完整的电功工具和**购买税务发票**或付款收据及具备电功工具编号交到您的**博世电动工具授权维修中心。**

Key To Symbols

- Electronic Control
- Rotation Stop
- Constant Electronic
- Forward / Reverse Rotation
- Overload Clutch
- Slim Grip
- Inox For a perfect finish on stainless steel
- Spindle Lock
- Saw Blade Pendulum Action
- Dust Extraction
- Bosch SDS System
- SDS-Plus Tool Holder
- Fine Depth Adjustment
- Distortion-resistant protective guard
- SDS-Max Tool Holder
- SDS-Plus Quick Exchange System
- SDS-Clic Quick Clamping System
- Velcro Fastening
- Easy Fit
- Kick Back Stop
- Turbo Blower
- Removable Cable
- Torque Control
- Restart Protection
- Direct Cooling and Additional Air Inlets
- Brushless EC Motor
- Restart Protection
- Intelligent Brake System
- Drop Control
- Vibration Control
- Auto-Lock
- Woodrazor
- Turbo Power
- Laser Class 2
- Laser Class 3R
- XLOCK

While all care has been taken to ensure that the information contained in this publication is correct, no responsibility can be accepted for any inaccuracy.
The Company reserves the right to alter or modify the information contained herein at any time in light of technical or other developments.
Technical specification are valid under normal operating condition only.
The company does not accept any responsibility for any misuse of the product and cannot be held liable for consequential damage.

SERVICE

Authorised Service Centres

TK JAYA AUTO TRADING
57, Rumah Kedai Perumahan Awam Mergong,
Jalan Sepat 1, 05150 Alor Star, Kedah.
Tel: 04 - 734 4550 Fax: 04 - 734 4550

SYARIKAT CHANG TRADING
3566-H&I, Jalan Sultanah Zainab,
15050 Kota Bharu, Kelantan.
Tel: 09 - 748 4237 Fax: 09 - 744 9671

ALOR STAR

KOTA BHARU

CHAN YEE AUTO ELECTRIC SERVICE
6323, Jalan Kampung Paya,
12200 Butterworth, Pulau Pinang.
Tel: 04 - 332 8496 Fax: 04 - 323 7760

BUTTERWORTH

PENANG

HINES SOLUTION
83, Jalan C. Y. Choy,
10300 Georgetown, Pulau Pinang.
Tel: 04 - 263 2136 Fax: 04 - 262 1909

KIM HENG MOTOR ELECTRICAL SERVICE
30, Kawasan Perindustrian Batu 3,
Jalan Gambang, 25150 Kuantan, Pahang.
Tel: 09-513 5662 Fax: 09-514 2430

KUANTAN

IPOH

ENG SOON ELECTRIC TRADING CO.
No. 235, Jalan Bercham, Taman Desa Kencana,
31400 Ipoh, Perak.
Tel: 05-546 9487 Fax: 05-546 6181

KUALA LUMPUR (North)

FOREVER TOOLS SERVICES
24, Jalan Chenderuh 2, Off Jalan Ipoh Batu 4 1/4,
51200 Kuala Lumpur.
Tel: 03 - 6252 9918 Fax: 03 - 6252 8918

KLANG

PUCHONG

TOOLS HAUS SDN BHD
G22, Jalan Puteri 4/8, Bandar Puteri Puchong,
47100, Selangor.
Tel: 03 - 8066 2635 Fax: 03 - 8051 2632

MENG TAT MACHINERY SERVICE
181, Batu 1 1/4, Off Jalan Kapar,
41400 Klang, Selangor.
Tel: 03 - 3343 0951 Fax: 03 - 3344 4419

SEGAMAT

MELAKA

SIN SONG SDN BHD
No. 5, Jalan Melur 1, Taman Melur,
85000 Segamat, Johor.
Tel: 07 - 943 4380 Fax: 07 - 943 4195

KLUANG

ANN TAT TRADING
367-C, Jalan Melor 2, Taman Peringgit Jaya,
75400 Melaka.
Tel: 06 - 284 1878

HENG LEE POWER TOOLS SERVICES
2, Jalan Dato Suleiman Mohd Noor,
Kluang Baru, 86000 Kluang, Johor.
Tel: 019 - 722 8446 Fax: 07 - 772 2712

JOHOR BAHRU

KOTA KINABALU

VINCO POWER TOOLS SERVICES
7, Jalan Teratai 10, Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07 - 353 2433 Fax: 07 - 357 7621

CMW ENGINEERING (SABAH) SDN BHD
Lot No. 9, Likas Realty, Mile 5 1/2,
Tuaran Road, Likas Industrial Centre,
88450 Likas, Kota Kinabalu, Sabah.
Tel: 088 - 389 922 Fax: 088 - 426 109

CMW ENGINEERING CORPORATION SDN BHD
10, Lot 1549, Block 10 KYLD,
2 1/2 Miles Rock Road, 93250 Kuching, Sarawak.
Tel: 082 - 420 141/151 Fax: 082 411 335

KUCHING

Visit the selected Authorised Service Centres when your tools breakdown.

Bosch Service Concept Stores

Robert Bosch Sdn Bhd (220975-V)
No. 8A, Jalan 13/6, 46200 Petaling Jaya, Selangor Darul Ehsan, Malaysia.
Tel: +603 - 7966 3000 Fax: +603 - 7958 3838
www.bosch-pt.com.my

Bosch Professional Power Tools and Accessories

For further enquiries, please contact
1 800 880 188
Mon - Fri 9am - 6pm